


"CITY OF COLUMBUS RFQ019251"

THIS QUOTATION IS VALID FOR 30 DAYS

Please sign and return to confirm order

X _____

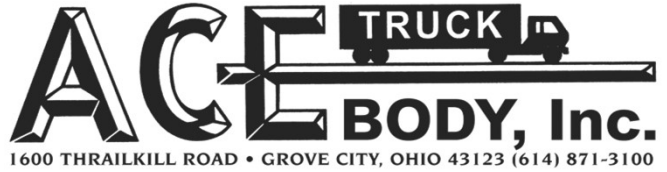

QUOTE

Name	John King				Date:	10/20/2021	
Company	City of Columbus Fleet Management Division				Sales		
Address	4211 Groves Road				Rep:	Rick Tschiggfrie	
City	Columbus	State	OH	Zip	43232	Order	
Phone	614-645-6104	E-Mail	jwking@columbus.gov		Date:		
Division					PO #:		
Chassis Information:	2022	Make Cab	Ford Regular Cab	WB CA/CT	193" WB 108" CA	Model Engine GVWR	F550 CNG Cabinet 19,500#

Qty	Description	Unit Price	Total
1	<p>Stellar 1302E Commercial Fleet Tire Service Truck 2022 Ford Cab Chassis with a 108" Cab-To-Axle, constructed as follows:</p> <ul style="list-style-type: none"> *13' Long x 8' Wide Aluminum Body *(2) 64" High Front Vertical Compartments - 22" Deep x 26" Wide *Full Height Removable Rear Gate Between Vertical Compartments *(2) Underbody Boxes Located at Curbside & Streetside Rear 19"H x 38"W x 22" D *(2) Underbody Boxes Located at Curbside & Streetside Front 19"H x 29"W x 22" D *Body Painted White - Single Stage - Non-Metallic *Underbody Tool Box Panel - Installed *Lid for Hydraulic Air Compressor *(2) Bar Truck Tire Safety Inflation Cage - Stows on Body Deck *Aluminum Folding Step Installed *Plastic Tray Package (4) 5" W Trays & (6) 3.5" Trays for Vertical Compartments *HD Drawer Set in CS1V Hanging from Top (2) 3" Drawers - 18" W x 18" D *15-Pin Socket Rack Installed in CS1V *DRI-DEK Installed on ALL Shelving & Compartment Floors *(6) Adjustable Shelves *21" Sign Board Panel Extension to Make a 43" Sign Panel *Adjustable Horizontal Tire Racks - 3 Bars *Electrical Control Kit Utilizing Ford Upfitter Switches *Plus additional standard Stellar features <p><u>American Eagle 46P Air Compressor</u></p> <ul style="list-style-type: none"> *46 CFM @ 175 PSI 2-Stage Industrial Piston Air Compressor *Direct Drive Coupling *Hydraulic Motor with Oil Cooler & Fan *15 Gallon Hydraulic Reservoir - 20 Gallon Air Tank *Steel Base Plate with Filter - Unit is Painted Single Stage White 		
(Page # 1 of 2 - Continued Next Page)			

This order not binding until approved by a company official. All quotations & delivery promises made and orders accepted subject to delays caused by fire, accident, strike or other causes beyond our control. Deliveries delayed by any of the above conditions shall not constitute cause for cancellation of this order. Price subject to change without notice.


SubTotal	
Freight	
Taxes	"Exempt"
TOTAL	

"CITY OF COLUMBUS RFQ019251"

THIS QUOTATION IS VALID FOR 30 DAYS

Please sign and return to confirm order

X _____

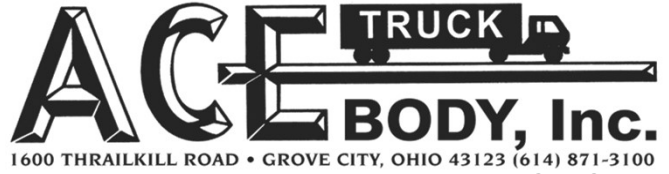

QUOTE

Qty	Description	Unit Price	Total
	<p><u>HYDRAULIC SYSTEM:</u></p> <ul style="list-style-type: none"> *PTO for Ford 10-Speed Automatic Transmission *Single Section Hydraulic Pump *Electronic Load-Sensing Speed Control for Ford *All Necessary Hose & Fittings <p><u>AIR SYSTEM:</u></p> <ul style="list-style-type: none"> *3/8" X 50' Reel Craft Dual Pedestal Hose Reel - Artic Grade *1/2" x 50' Reel Craft Dual Pedestal Hose Reel - Artic Grade *1/2" FLR with Safety Air Dump Valve - Installed Curbside *20' OTR Inflation/Deflation Hose Kit with Quick Release Coupler for Evacuation *Includes Muffler, Small & Large Bore Core Ejectors & 1/4 Turn Ball Valve *Rotary Air Gauge for Checking Tire Pressure *(2) Auxiliary Air Outlets - (1) 3/8" & (1) 1/2" <p><u>TOMMY 2000# SERVICE BODY LIFTGATE:</u></p> <ul style="list-style-type: none"> *2000# Capacity Liftgate with Galvanized Frame - Recessed Lights *Folding Side Rail & Tire Stop *Sign Panel for Rear <p><u>LIGHTING:</u></p> <ul style="list-style-type: none"> *LED Compartment Light Kit with Electric Control Switch *(4) LED Worklights Installed *Streamlight Stinger Switchblade LED Work Light with J-Hook, Magnetic Base & UV Light for Leak Detection - Includes Charger *Whelen Justice Amber 56" Light Bar Mounted on Top of CNG Cabinet *Lightbar per City of Columbus Contract Bid - Includes Power Control Center *(4) Whelen Micron Super LED Strobes Mounted at Rear of Body *(3) Whelen Micron Super LED Strobes Mounted in Front Grill *Electric Back-Up Alarm Installed *Installation of Chassis Supplied Back-Up Camera <p><u>MISC:</u></p> <ul style="list-style-type: none"> *Removable Angle in Floor - (1st) 32" Back From Front of Body (2nd) 72" Back *Channel B-Line on Inside of Body Centered Between Floor & Upper B-Line (41") *Heavy Duty Rubber Mudflaps Installed Rear of Axle *(2) Ingersol Rand Air Impact Wrenches # 2190TI-6 *(2) Ingersol Rand 1/2" Air Impact Wrenches # 2235TIMAX-2 *(2) OTC Air Jacks # UA27 & (2) Cheetah 5-Gallon Tire Bead Set Tool *(1) Ken-Tool Tire Truck Service Kit # 35442 <p align="right">~ Total Installed Price Each</p>		\$ 82,495.00
	<p>Thank You - Rick Tschiggfrie - fob: City of Columbus (Page # 2 of 2 - End of Quotation)</p>		
	<p><i>This order not binding until approved by a company official. All quotations & delivery promises made and orders accepted subject to delays caused by fire, accident, strike or other causes beyond our control. Deliveries delayed by any of the conditions shall not constitute cause for cancellation of this order. Price subject to change without notice.</i></p>	<p>SubTotal</p> <p>Freight</p> <p>Taxes</p> <p>TOTAL</p>	<p>\$ 82,495.00</p> <p>"Exempt"</p> <p>\$ 82,495.00</p>