



**FAMILY OWNED
SINCE 1890**

To The:

City of Columbus, Ohio
Purchasing Office
77 North Front Street; Room 523
Columbus, OH 43215

Date: September 17, 2020

FOR YOUR REVIEW:

We hereby propose and agree to furnish the following firefighting apparatus upon your acceptance of this proposal:

Reference Ohio State Term Schedule – Contract No. 800257

One (1) or More Monarch Custom Sutphen Rescue Complete and Delivered For The Total Sum of:.....\$773,737.00

A Second unit can be purchased for the total sum of:.....\$765,737.00

A Third unit can be purchased for the total sum of:.....\$765,737.00

A Fourth unit can be purchased for the total sum of:.....\$765,737.00

A Fifth unit can be purchased for the total sum of:.....\$765,737.00

Total Selling Price for (5) units with Equipment Package and Communications Package as requested.....\$3,836,685.00

The truck will be manufactured completely in accordance to the following proposal and delivered approximately **360-440 Days** after approval of contract, subject to delays from all causes beyond our control. Unless accepted within **60 days** from this date, the right is reserved to withdraw this proposal.

Respectfully submitted by:

Harry B. Sutphen
Sutphen Corporation






Sutphen Corporation
PO Box 158 • Amlin, OH 43002-0158
6450 Eiterman Road • Dublin, OH 43016-8711
Tel 614 889-1005 • Toll Free 800 848-5860 • Fax 614 889-0874
www.sutphen.com • Sutphen@sutphencorp.com

PRELIMINARY DRAWING - FOR LAYOUT PURPOSES ONLY

REVISIONS			
REV	DESCRIPTION	DATE	BY

NOTE 1: Do not scale drawing. This drawing is for general truck configuration only. All items and dimensions shown are approximate and may vary with final production. The drawing may not provide illustration for all items in the specification. In all situations where the drawing may contradict the specifications, the specifications shall prevail. This drawing and all data herein are provided as confidential materials and shall not be reproduced without written consent of the manufacturer.

NOTE 2: Chassis frame height will change due to axle characteristics, loading and tire dimensions which will effect the overall height dimension shown. Any overall height restrictions should take this into consideration and allow approximately 2-3 inches of tolerance.

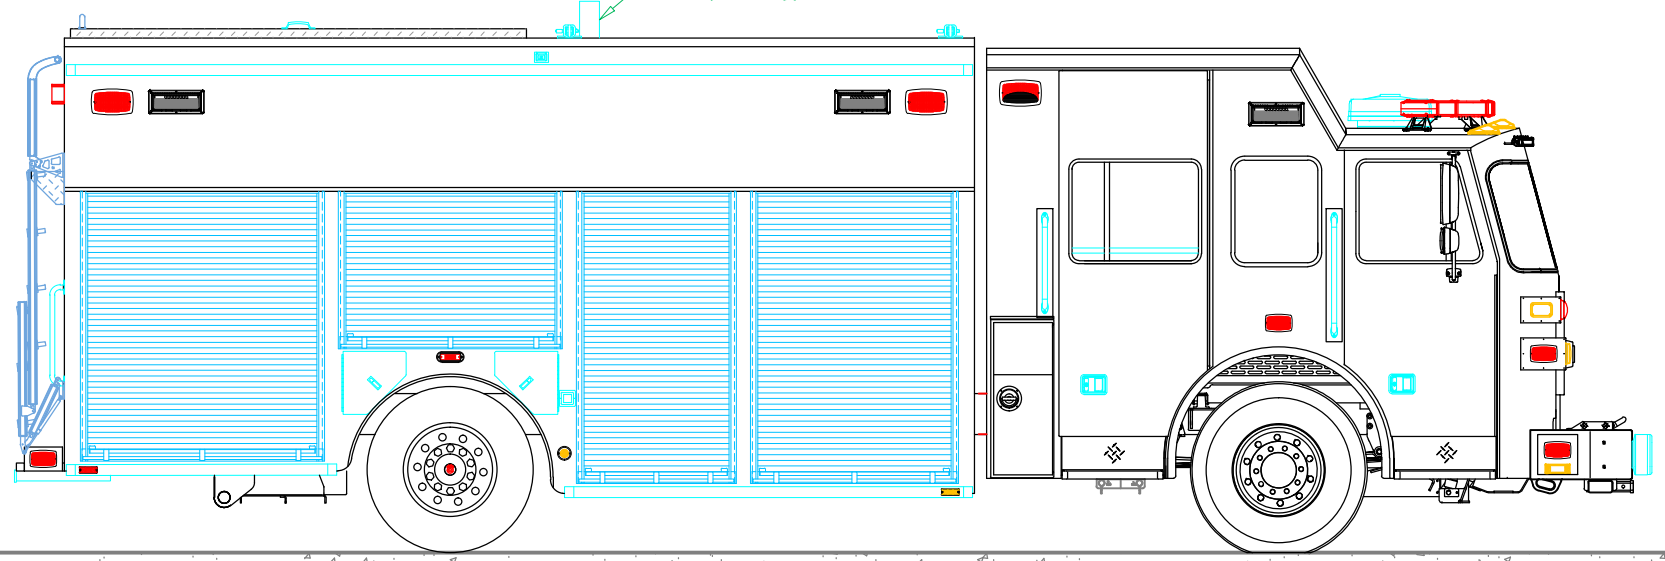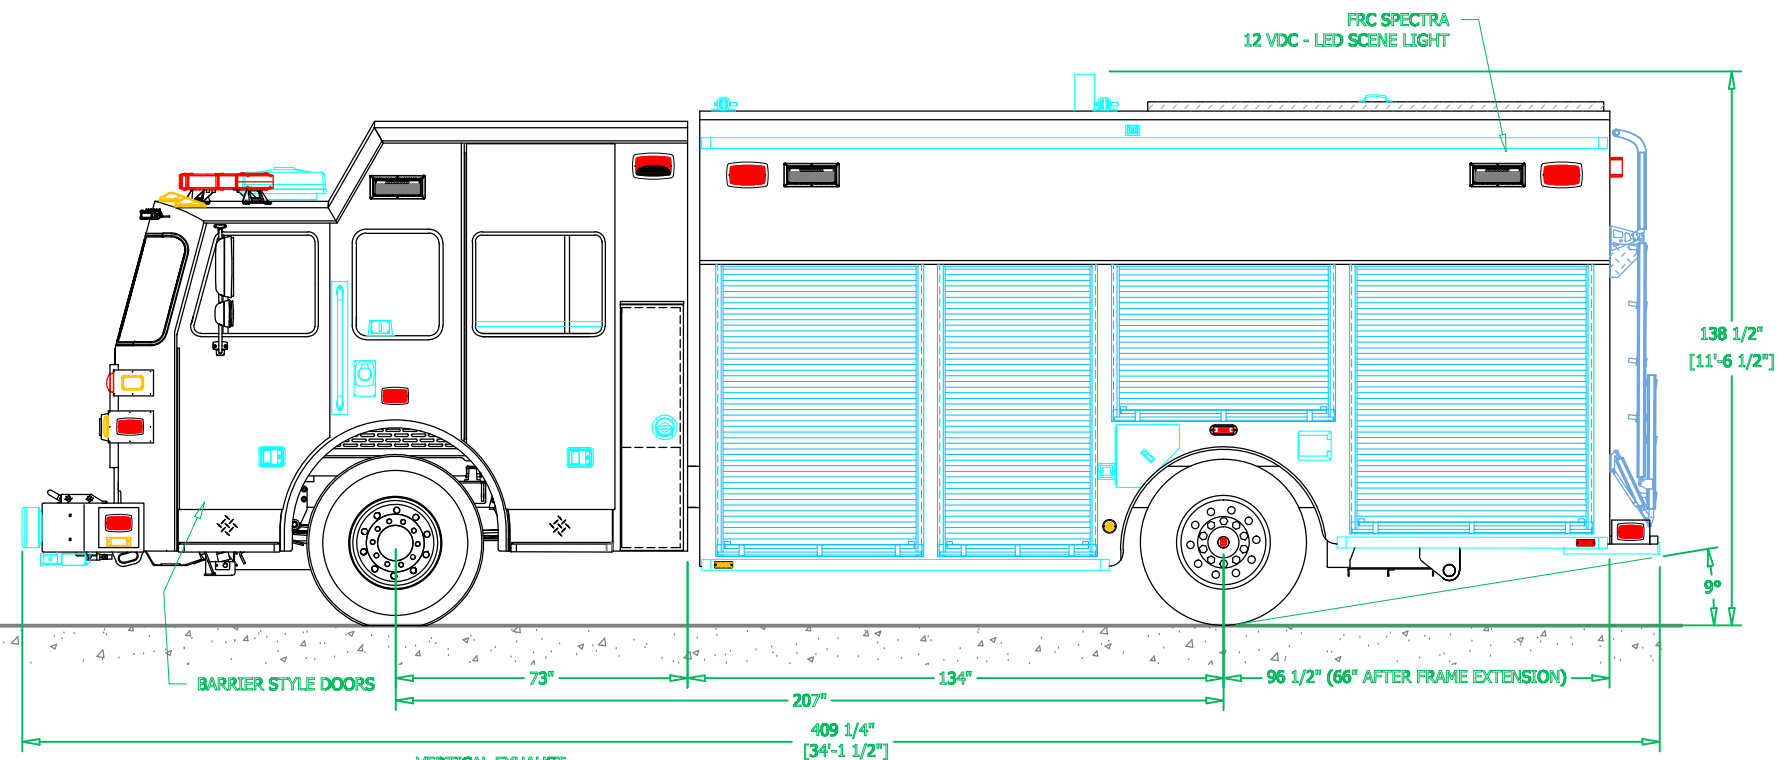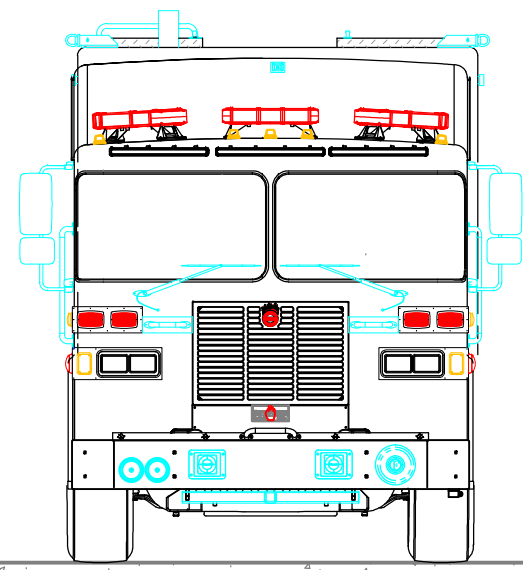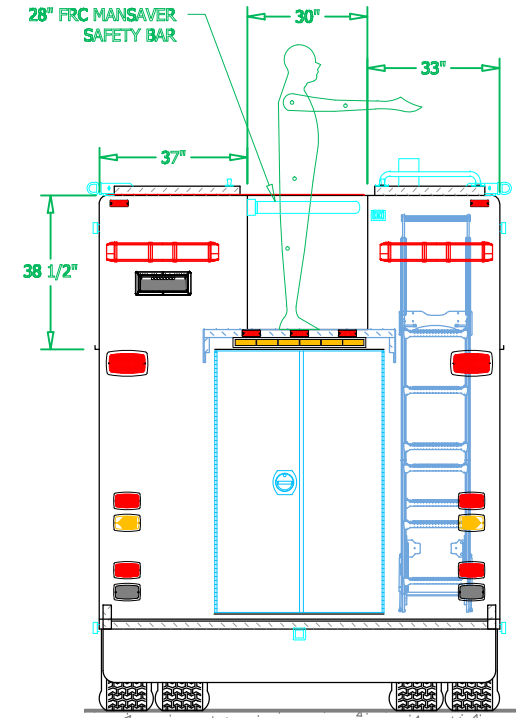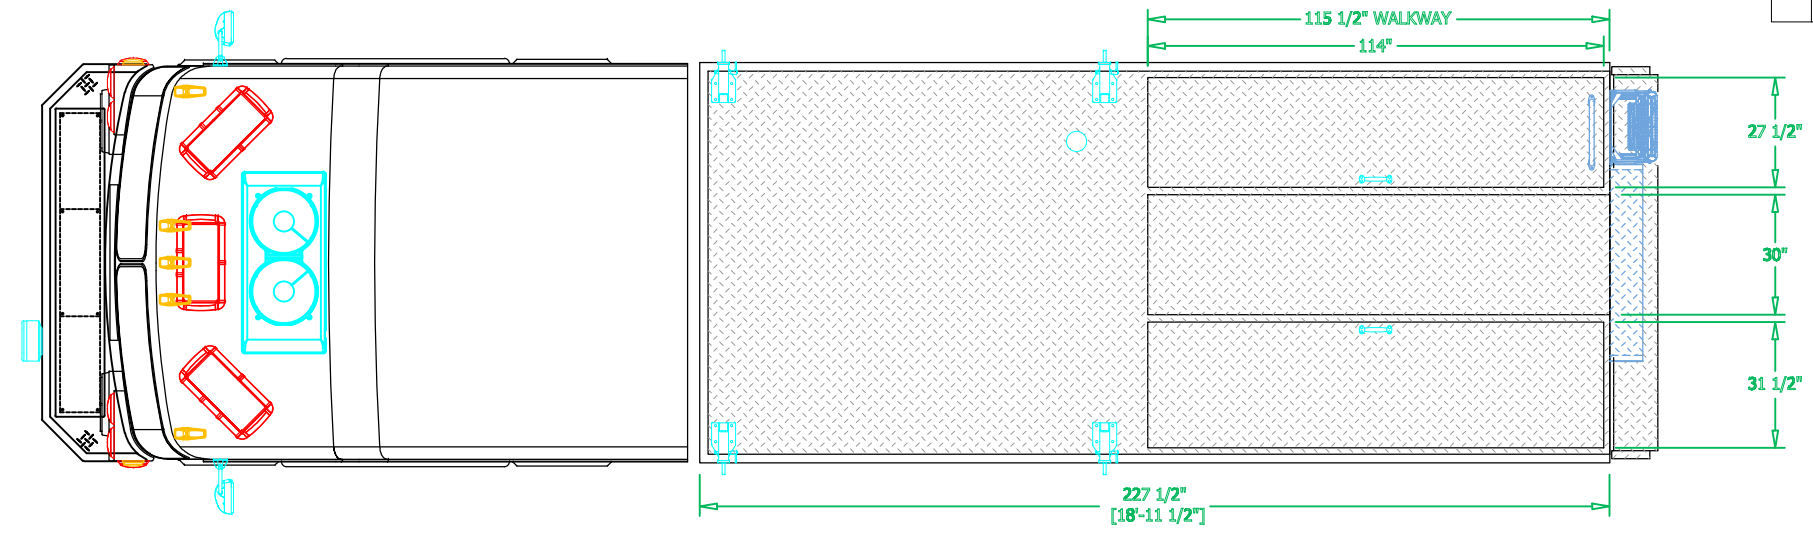

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

SUTPHEN CORPORATION
FIRE APPARATUS SINCE 1890
7000 COLUMBUS-MARYSVILLE ROAD
AMLIN, OHIO 43002


COLUMBUS FIRE DEPARTMENT

BODY SIZE: 18' BODY	UNIT TYPE: HEAVY RESCUE
BODY MATERIAL: 3/16" ALUMINUM	TRUCK NO: SVI #xxx
CHASSIS TYPE: SUTPHEN	WHEELBASE: SEE DWG
MONARCH 73"	CAB TO AXLE: SEE DWG
20" RR	OVERALL LENGTH (OAL): SEE DWG
FOUR DOOR	OVERALL WIDTH (OAW): SEE DWG
	OVERALL HEIGHT (OAH): SEE DWG

DRAWN BY: HDR DATE: May 15, 2020 SCALE: 1/4" = 1'-0"
DRAWING NO: Columbus OH HR Prelim2 SHEET 1 OF 3

PRELIMINARY DRAWING - FOR LAYOUT PURPOSES ONLY

REVISIONS			
REV	DESCRIPTION	DATE	BY

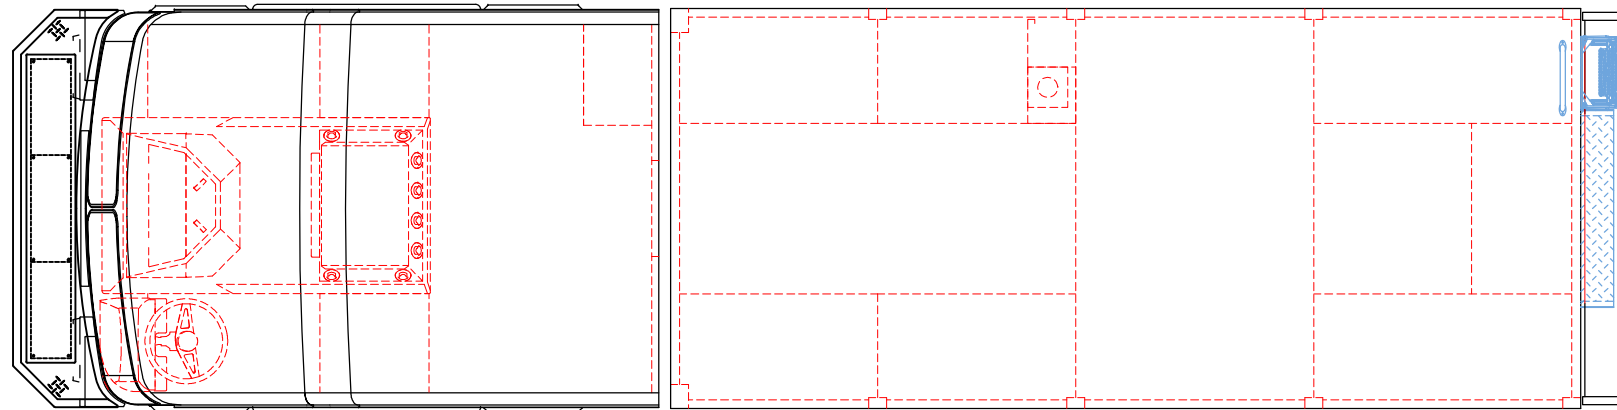


LEFT SIDE COMPARTMENTATION				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL UP	42" w X 69h	49" w X 76" h X 26 1/2" d	57 CU. FT.
L2	ROLL UP	42" w X 69h	49" w X 76" h X 26 1/2" d	57 CU. FT.
L3	ROLL UP	52" w X 35" h	59" w X 43" h X 26 1/2" d	39 CU. FT.
L4	ROLL UP	57" w X 63" h	57" w X 63" h X 26 1/2" d	55 CU. FT.

RIGHT SIDE COMPARTMENTATION				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL UP	42" w X 69h	49" w X 76" h X 26 1/2" d	57 CU. FT.
R2	ROLL UP	42" w X 69h	49" w X 76" h X 26 1/2" d	57 CU. FT.
R3	ROLL UP	52" w X 35" h	59" w X 43" h X 26 1/2" d	39 CU. FT.
R4	ROLL UP	57" w X 63" h	57" w X 63" h X 26 1/2" d	55 CU. FT.


REAR COMPARTMENT				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
RC1	HINGED	37" w X 65" h	42" w X 69" h X 64" d	107 CU. FT.

UPPER BODY COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
STREETSIDE	HINGED	89" w X 27" h	89" w X 31" h X 29" d	46 CU. FT.
CURBSIDE	HINGED	125" w X 27" h	125" w X 31" h X 29" d	65 CU. FT.

TOTAL EXTERIOR COMPARTMENT STORAGE: 634 CU.FT.

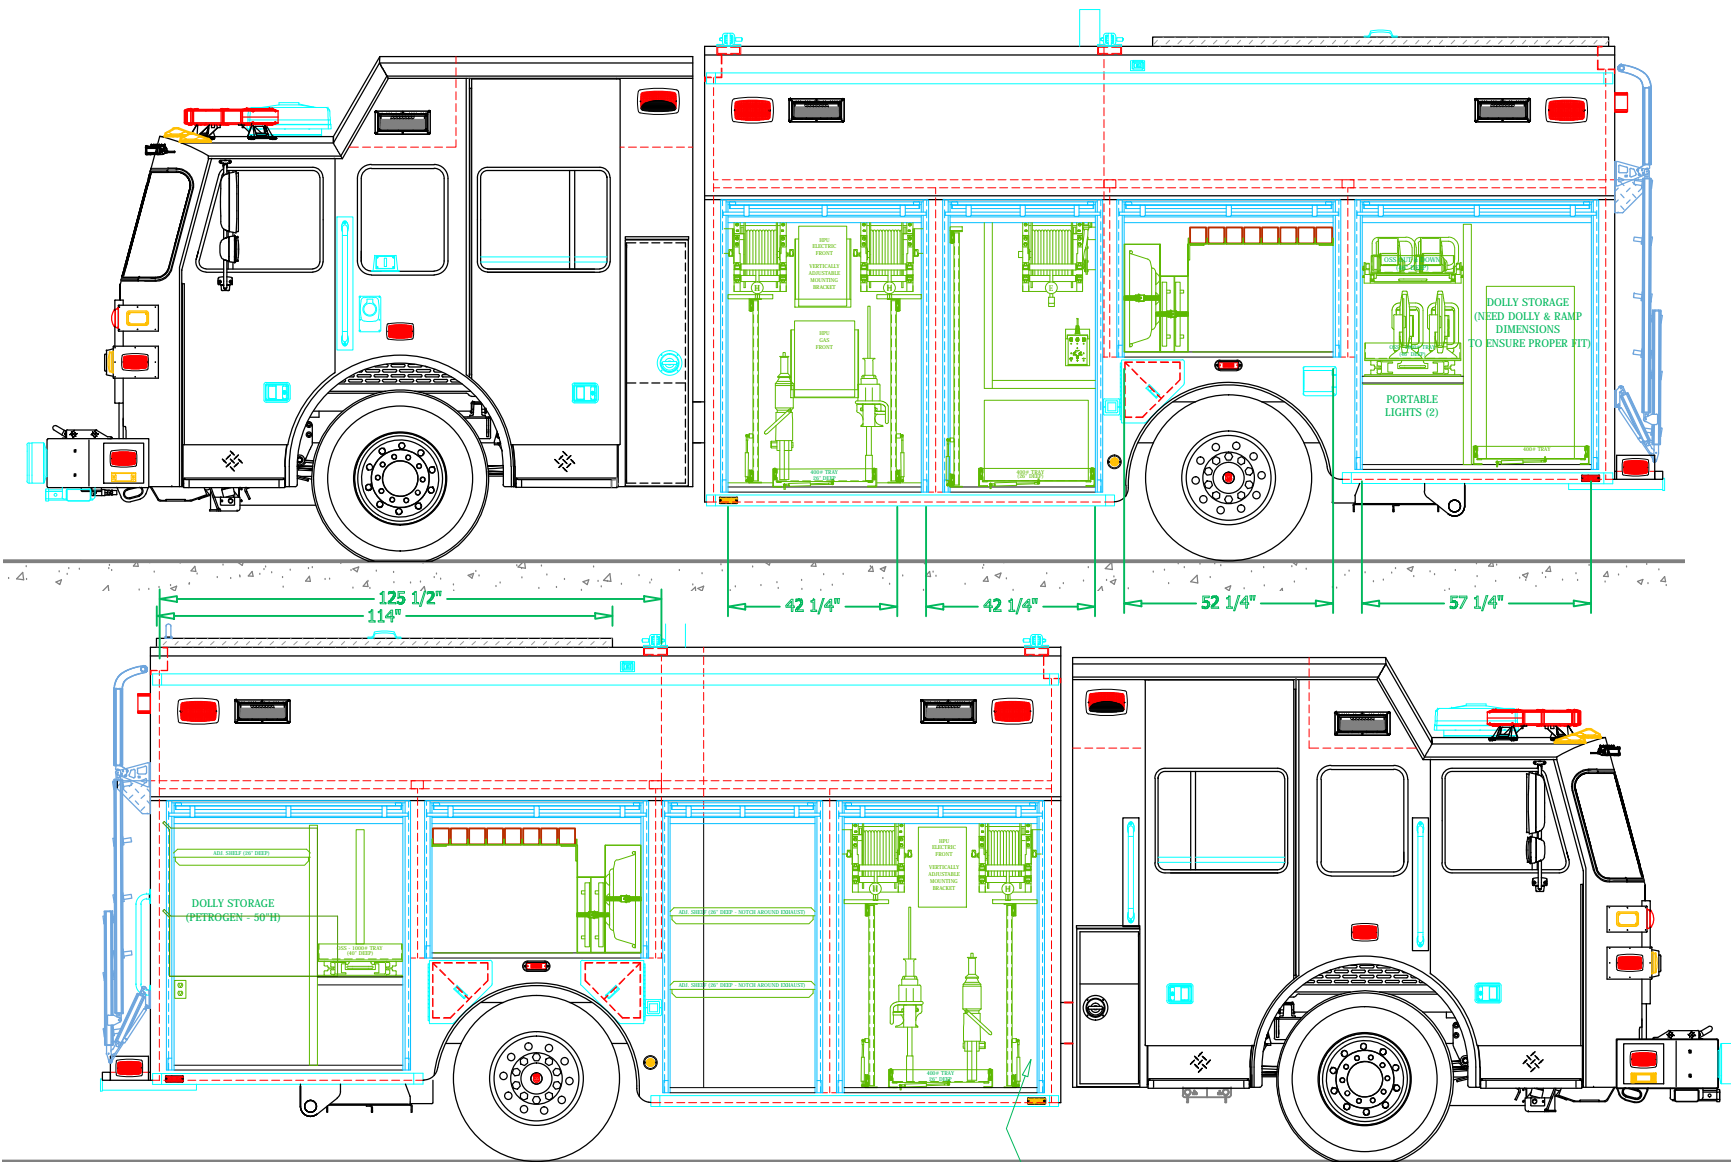

125 1/2"
114"
42 1/4" 42 1/4" 52 1/4" 57 1/4"

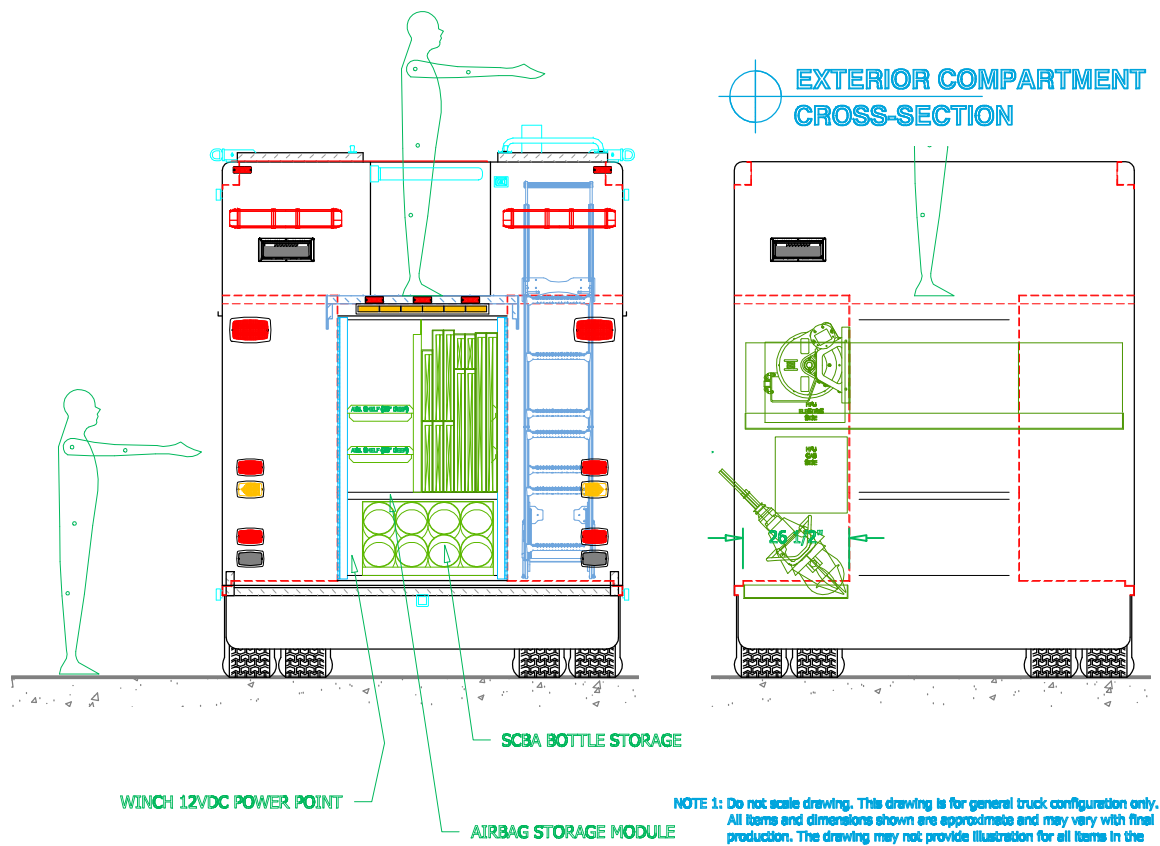

EXTERIOR COMPARTMENT CROSS-SECTION

WINCH 12VDC POWER POINT
SCBA BOTTLE STORAGE
AIRBAG STORAGE MODULE

NOTE 1: Do not scale drawing. This drawing is for general truck configuration only. All items and dimensions shown are approximate and may vary with final production. The drawing may not provide illustration for all items in the specification. In all situations where the drawing may contradict the specifications, the specifications shall prevail. This drawing and all data herein are provided as confidential materials and shall not be reproduced without written consent of the manufacturer.

THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.

SUTPHEN CORPORATION
FIRE APPARATUS SINCE 1890
7000 COLUMBUS-MARYSVILLE ROAD
AMLIN, OHIO 43002

COLUMBUS FIRE DEPARTMENT

BODY SIZE: 18' BODY	UNIT TYPE: HEAVY RESCUE
BODY MATERIAL: 3/16" ALUMINUM	TRUCK NO: SVI #xxx
CHASSIS TYPE: SUTPHEN	WHEELBASE: SEE DWG
MONARCH 73"	CAB TO AXLE: SEE DWG
20" RR	OVERALL LENGTH (OAL): SEE DWG
FOUR DOOR	OVERALL WIDTH (OAW): SEE DWG
	OVERALL HEIGHT (OAH): SEE DWG

DRAWN BY: HR DATE: May 15, 2020 SCALE: 1/4" = 1'-0"
DRAWING NO: Columbus OH HR Prelim2 SHEET 2 OF 3

CAB TILT CONTROLLER

PROPOSAL

FOR ONE (1)

OR MORE SUTPHEN

MONARCH HEAVY RESCUES

OHIO STATE TERM

FOR

COLUMBUS DIVISION OF FIRE

COLUMBUS, OH

SUTPHEN CORPORATION
6450 Eiterman Road | Dublin, OH 43016 | 1-800-848-5860

Table of Contents

INTENT OF SPECIFICATIONS.....	12
STATEMENT OF EXCEPTIONS TO NFPA 1901	12
QUALITY AND WORKMANSHIP	12
PERFORMANCE TESTS AND REQUIREMENTS.....	13
FAILURE TO MEET TESTS.....	13
EXCEPTIONS TO SPECIFICATIONS.....	14
GENERAL CONSTRUCTION	14
DELIVERY REQUIREMENTS.....	14
PURCHASER RIGHTS.....	14
U.S.A. MANUFACTURER.....	14
MANUFACTURER'S EXPERIENCE	15
SINGLE SOURCE WARRANTY	15
FAMA COMPLIANCE.....	15
PROPOSAL DRAWING	15
APPROVAL DRAWING	15
WIRING SCHEMATIC	15
.....	15
.....	16
CHASSIS.....	16
DOUBLE FRAME RAILS/SINGLE AXLE.....	16
FRONT TOW EYES, BELOW BUMPER.....	16
TOW EYES, PAINTED FINISH.....	17
REAR TOW EYES.....	17
STEERING	17
DRIVE LINE	17
ENGINE.....	17
AIR COMPRESSOR	18
STARTER.....	18
EXHAUST SYSTEM	18
AFTER TREATMENT SYSTEM	18
ON-BOARD DIAGNOSTIC (OBD) SYSTEM.....	18
ENGINE WARRANTY	19
AIR CLEANER/INTAKE.....	19

PRIMARY FUEL FILTER/WATER SEPARATOR	19
12VDC HEATER.....	19
SECONDARY FUEL FILTER.....	20
MINI DATA LINK ADAPTER	20
TRANSMISSION	21
TRANSMISSION FLUID.....	21
ENGINE BRAKE	21
TRANSMISSION COOLER	22
TRANSMISSION SHIFTER	22
COOLING SYSTEM	22
RADIATOR	22
CHARGE AIR COOLER	23
COOLANT	23
HOSES & CLAMPS.....	23
FAN	23
FAN CLUTCH.....	23
SURGE TANK	24
FUEL TANK	24
FUEL FILL	24
FUEL COOLER	25
DIESEL EXHAUST FLUID TANK	25
ALTERNATOR.....	25
LOW VOLTAGE ALARM.....	25
BATTERIES	25
BATTERY JUMPER TERMINAL.....	26
120V SHORELINE INLET & AUTO EJECT	26
120-VOLT OUTLETS WIRED TO SHORELINE INLET.....	26
BATTERY CHARGER	26
INDICATOR LIGHT.....	27
FRONT AXLE	27
SUSPENSION (FRONT)	27
STEER ASSIST	27
FRONT TIRES	27
REAR AXLE.....	27
TOP SPEED	28
SUSPENSION (REAR).....	28

REAR TIRES.....	28
TIRE PRESSURE MONITOR.....	28
WHEELS.....	28
HUB COVERS	29
LUG NUT CAPS	29
FRONT MUD FLAPS	29
REAR MUD FLAPS.....	29
BRAKES, Front	29
BRAKES, Rear	29
AIR BRAKE SYSTEM	29
AUTOMATIC HEATED MOISTURE EJECTORS	30
AIR OUTLET	30
AIR INLET.....	31
ELECTRONIC STABILITY CONTROL SYSTEM	31
AIR BRAKING ABS SYSTEM	31
AUTOMATIC SLIP RESPONSE.....	31
ASR SWITCH	32
COMPRESSION FITTINGS ON AIR SYSTEM	32
MISCELLANEOUS CHASSIS EQUIPMENT.....	32
ALUMINUM CAB	32
CAB DESIGN	33
CAB SUB-FRAME	34
CAB DIMENSIONS.....	34
ROOF DESIGN.....	34
FENDER CROWNS.....	34
CAB INSULATION.....	35
EXTERIOR GLASS	35
SUN VISORS.....	35
CAB STRUCTURAL INTEGRITY.....	35
SEAT BELT TESTING	36
CAB LOCKDOWN LATCHES.....	36
CAB TILT SYSTEM	36
MANUAL CAB LIFT.....	36
BARRIER STYLE CAB DOORS	37
STEP WELLS.....	37
CAB STEPS	37

AUXILIARY CAB STEPS	38
STEP LIGHTS	38
POWER WINDOWS	38
CAB REAR WALL WALK THRU, FOR ACCESS TO HEAVY RESCUE/HAZMAT BODY	38
WINDSHIELD WIPERS.....	38
MIRRORS.....	38
MIRROR, BLIND SPOT.....	39
UPPER GRILLE.....	39
UPPER GRILLE LOGO	39
LOWER GRILLE	39
PAINTED STEEL BUMPER.....	39
BUMPER SIDES.....	40
STORAGE WELL COMPARTMENT	40
BUMPER TROUGH LIP	40
DIAMOND PLATE BUMPER LID.....	40
PROTECTIVE BUMPER COATING	40
RECEIVER (Front).....	40
WIRING	41
AIR HORNS	41
AIR HORN BUMPER CUT-OUTS	41
AIR HORNS WIRED TO STEERING WHEEL.....	41
LANYARD CONTROL FOR AIR HORNS	41
ELECTRONIC SIREN.....	41
SIREN SPEAKERS.....	41
SPEAKER MOUNTING.....	42
MICROPHONE BRACKET.....	42
FEDERAL Q2B SIREN.....	42
FOOT SWITCH, DRIVER'S SIDE.....	42
MOMENTARY SWITCH ON DASH	42
MASTER Q2B SHUTOFF SWITCH WITH GUARD.....	42
CAB EXTERIOR LIGHTING	43
HEADLIGHTS.....	43
HEADLIGHT FINISH.....	43
FRONT TURN SIGNALS	43
CORNERING LIGHTS	43
DAYTIME RUNNING LIGHTS	43

DOOR AJAR DISABLE SWITCH	44
EXTERIOR CAB HANDRAILS	44
HANDRAILS, FRONT OF CAB.....	44
HANDRAIL SCUFF PLATES.....	44
INTERIOR CAB HANDRAILS.....	44
INTERIOR CAB HANDRAILS.....	44
CAB DOOR HANDRAILS	45
DRIVER'S SIDE CAB COMPARTMENT.....	45
ACCESS TO CREW SEAT RISER	45
OFFICER'S SIDE CAB COMPARTMENT	45
ACCESS TO CREW SEAT RISER	46
ADJUSTABLE SHELF	46
HOOK STORAGE COMPARTMENT	46
PRO TEC	46
DIAMOND PLATE, CAB ROOF	46
BRUSH STAINLESS B PILLER SCUFF PLATES	46
DOOR JAM SCUFFPLATES.....	47
CAB INTERIOR	47
INTERIOR DOOR PANELS.....	47
CAB FLOOR COVERING.....	47
DIAMOND PLATE, CAB FLOOR	47
ENGINE ENCLOSURE	48
ENGINE ENCLOSURE COVERING	48
TOOL MOUNTING PLATE.....	48
ENGINE HOOD LIGHTS	48
COMPUTER TRAY	48
CENTER CONSOLE	49
INSTRUMENT PANEL.....	50
MASTER BATTERY & IGNITION SWITCH	50
DIESEL PARTICULATE FILTER CONTROLS.....	51
INSTRUMENTATION & CONTROLS.....	51
CENTER CONTROL CONSOLE.....	52
OVERHEAD CONTROL CONSOLE	53
ENGINE WARNING SYSTEM	54
CAB LOCKDOWN INDICATOR LIGHT.....	54
DOOR AJAR LIGHT	54

PROGRAMMABLE LOAD MANAGER.....	54
HIGH IDLE.....	55
AUXILIARY POWER POINT	55
USB POWER POINTS.....	56
CAB ACCESSORY FUSE PANEL	56
POWER & GROUND STUDS, OVERHEAD COMMAND CONSOLE	56
POWER & GROUND STUDS, LOWER COMMAND CONSOLE	56
VEHICLE DATA RECORDER.....	57
SPRING LOADED PAPER CLIP.....	57
MOMENTARY BACK UP ALARM DISABLE	57
LIGHTING CAB INTERIOR.....	57
LIGHTING CREW CAB INTERIOR	57
HEAVY DUTY HEATER/DEFROSTER/AIR CONDITIONER.....	57
HEATER/DEFROSTER/AIR CONDITIONING CONTROLS	58
FLOORBOARD HEATING DUCT	58
DEFROSTER DIFFUSER.....	58
TOOL MOUNTING PLATE.....	58
STORAGE COMPARTMENT.....	59
METAL VENT COVERS.....	59
AUXILIARY DEFROSTER FAN	59
AUXILIARY DEFROSTER FAN	59
AUXILIARY DEFROSTER FANS	59
DRIVER'S SEAT.....	59
HELMET STORAGE.....	60
OFFICER'S SEAT	60
UNDER SEAT STORAGE COMPARTMENT	60
HELMET STORAGE.....	60
CREW SEAT – DRIVER'S SIDE, REAR FACING	60
HELMET STORAGE.....	61
CREW SEAT – OFFICER'S SIDE, REAR FACING	61
HELMET STORAGE.....	61
CREW SEAT - OFFICER'S SIDE, FORWARD FACING, OUTBOARD.....	61
HELMET STORAGE.....	61
SEAT UPHOLSTERY COLOR.....	62
BOTTOM CUSHION SEAT COVERS.....	62
BACK SEAT COVERS.....	62

SCBA BRACKETS	62
SEAT BELT WARNING SYSTEM	62
CREW SEAT COMPARTMENT	63
IN-CAB OVERHEAD STORAGE AREA	63
IN-CAB OVERHEAD STORAGE AREA	63
HD STEREO	63
LED ICC/MARKER LIGHTS	63
GROUND LIGHTING	63
OPTICAL WARNING SYSTEM	64
UPPER LEVEL WARNING DEVICES	64
LOWER LEVEL WARNING DEVICES	64
ADDITIONAL WARNING LIGHTS	65
ADDITIONAL WARNING LIGHTS	65
SURFACE MOUNTED LED SCENE LIGHT	65
BROW MOUNTED LED SCENE LIGHT	65
ADDITIONAL 3-WAY SWITCH	65
CORROSION REDUCTION POLICY	65
PAINTING	68
SINGLE TONE PAINT	69
PAINTED FRAME	69
AIR CONDITIONING CONDENSER	69
MISCELLANEOUS EQUIPMENT FURNISHED	70
LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST	70
TEST SEQUENCE	70
1. RESERVE CAPACITY TEST	70
2. ALTERNATOR PERFORMANCE TEST	70
TEST AT IDLE	70
TEST AT FULL LOAD	71
3. LOW VOLTAGE ALARM TEST	71
LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST	71
DOCUMENTATION	71
UL 120/240 VAC CERTIFICATION	72
DOCUMENTATION	73
DIELECTRIC VOLTAGE WITHSTAND TEST	73
.....	74
EXHAUST SYSTEM (VERTICAL)	74

MUDFLAPS	74
FUEL FILL	75
BODY DESIGN.....	75
EXTERIOR ALUMINUM BODY	75
DRIP RAILS.....	76
WALKWAY/ROOF COMPARTMENT SUPPORT	77
BODY SUBFRAME	77
BODY MOUNTING	77
12 REAR STEP BUMPER	78
REAR TOW EYES	78
TRAILER HITCH	78
TRAILER ELECTRICAL RECEPTACLE	79
TRAILER AUXILIARY ELECTRICAL RECEPTACLE	79
GROUND LIGHTS	79
WHEEL WELL EXTERIOR PANEL.....	79
DIEFORMED BEADED EDGE BODY FENDERS	80
WHEEL WELL LINERS.....	80
SCBA CYLINDER COMPARTMENTS	80
BODY PAINT SPECIFICATIONS	80
BODY PAINT PREPARATION	80
PAINT PROCESS.....	81
PAINT FINISH - SINGLE COLOR	82
BODY UNDERCOATING	82
UNDERCOAT WARRANTY.....	82
COMPARTMENT INTERIOR FINISH	83
REFLECTIVE STRIPE REQUIREMENTS.....	83
REFLECTIVE STRIPE - CAB SIDE	84
REFLECTIVE STRIPE - CAB FRONT	84
REFLECTIVE STRIPE - BODY SIDES.....	84
REFLECTIVE STRIPE - REAR OF BODY.....	85
CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS	85
LETTERING.....	86
SIDE CAB DOOR LETTERING	86
UPPER BODY SIDE LETTERING.....	86
FRONT OF CAB LETTERING.....	87
CAB ROOF LETTERING	87

CUSTOM DECAL LOGO - 12 -18.....	88
SUPPLIED DECALS	88
EXTERIOR COMPARTMENT DOORS.....	88
ROLL-UP DOOR CONSTRUCTION - AMDOR.....	88
BODY HEIGHT MEASUREMENTS	89
SIDE ROOF COMPARTMENT - SHELF TRAC.....	91
ROOF COMPARTMENT - VERTICAL PARTITION	91
WALKWAY/STEP LIGHTS	91
ACCESS LADDER	92
WALKWAY/STEP LIGHTS	92
WALKWAY EXTENSION STEP	93
ROOF ACCESS HANDRAIL	93
MAN SAVER BAR	93
BODY WIDTH DIMENSIONS.....	93
STREETSIDE COMPARTMENT - FRONT (S1).....	94
COMPARTMENT LAYOUT	95
STREETSIDE COMPARTMENT - AHEAD OF REAR WHEELS (S2)	97
COMPARTMENT LAYOUT	98
STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S3).....	101
COMPARTMENT LAYOUT	102
STREETSIDE COMPARTMENT - REAR (S4)	102
COMPARTMENT LAYOUT	103
CURBSIDE COMPARTMENT - FRONT (C1)	105
COMPARTMENT LAYOUT	106
CURBSIDE COMPARTMENT - AHEAD OF REAR WHEEL (C2).....	108
COMPARTMENT LAYOUT	109
CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C3)	110
COMPARTMENT LAYOUT	111
CURBSIDE COMPARTMENT - REAR (C4).....	111
COMPARTMENT LAYOUT	112
REAR COMPARTMENT - CENTER (RC1)	114
COMPARTMENT LAYOUT	115
ROPE ANCHOR OR PORTABLE WINCH RECEIVERS	116
UPPER SIDE BODY PROTECTION - RUB RAIL.....	120
WALK-IN INTERIOR FINISH DETAILS	120
DESK, CABINET, CONSOLE FINISH	120
CAB/BODY WALK-THROUGH CONNECTION.....	120

CUT OUT IN REAR CAB WALL	121
INTERIOR SPECIFICATIONS.....	121
INTERIOR INSULATION	121
INTERIOR FINISH	121
INTERIOR WALKWAY SIDE WALLS.....	122
.....	122
INTERIOR WALKWAY FLOOR.....	122
INTERIOR SUB-FLOOR	122
INTERIOR BENCH SEAT.....	123
INTERIOR LED LIGHTS.....	125
LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC	126
12 VOLT DIAGNOSTIC RELAY CONTROL CENTER.....	129
ROCKER SWITCH PANEL.....	129
BATTERY SYSTEM	130
BATTERY SWITCH	131
BATTERY SOLENOID	131
REAR SCENE LIGHTS SWITCHING	131
CAB HAZARD WARNING LIGHT	131
BRIGADE 360 CAMERA SYSTEM	132
VIDEO MONITOR.....	133
BRIGADE MOBILE BACKSCAN SYSTEM	133
.....	133
INTERIOR LED LIGHTS.....	133
TAIL LIGHTS.....	134
MIDSHIP MARKER/TURN SIGNAL.....	134
MARKER LIGHTS.....	134
CAB STEP LIGHTS / GROUND LIGHTS	134
LICENSE PLATE MOUNTING BRACKET	135
SIDE SCENE LIGHTS	135
REAR SCENE LIGHT	135
TRAFFIC ADVISOR LIGHTS	136
WARNING LIGHT PACKAGE	136
UPPER LEVEL OPTICAL WARNING DEVICES.....	137
LOWER LEVEL OPTICAL WARNING DEVICES	139
ONAN PTO GENERATOR.....	141
GENERATOR ENGAGEMENT.....	141
WARRANTY PERIOD	142

GENERATOR SPLASH GUARD	142
GENERATOR MOUNTING - ONAN PROTEC	142
MANUALS AND SCHEMATICS.....	142
POWER-TAKE-OFF GENERATOR DRIVE	143
LOADCENTER	143
.....	143
GENERATOR MONITORING PANEL	144
LINE VOLTAGE ELECTRICAL SYSTEM	145
GENERAL REQUIREMENTS	145
EQUIPMENT PAYLOAD WEIGHT ALLOWANCE	152
OPERATION AND SERVICE MANUALS	153
WARRANTIES	153
FIRE COM HOOKS.....	153
INSTALL	153
COMMUNICATION PACKAGE	154
EQUIPMENT TO BE SUPPLIED	154

INTENT OF SPECIFICATIONS

It is the intent of these specifications to cover the furnishing and delivery to the purchaser a complete apparatus equipped as hereinafter specified. With a view of obtaining the best results and the most acceptable apparatus for service in the fire department, these specifications cover only the general requirements as to the type of construction and tests to which the apparatus must conform, together with certain details as to finish, equipment and appliances with which the successful bidder must conform. Minor details of construction and materials where not otherwise specified are left to the discretion of the contractor, who shall be solely responsible for the design and construction of all features. The apparatus shall conform to the requirements of the current (at the time of bid) National Fire Protection Association Pamphlet #1901 for Motor Fire Apparatus unless otherwise specified in these specifications.

Bids shall only be considered from companies which have an established reputation in the field of fire apparatus construction and have been in business for a minimum of ten (10) years.

Each bid shall be accompanied by a set of "Contractor's Specifications" consisting of a detailed description of the apparatus and equipment proposed and to which the apparatus furnished under contract must conform. Computer run-off sheets are not acceptable as descriptive literature.

The specifications shall indicate size, type, model and make of all component parts and equipment.

STATEMENT OF EXCEPTIONS TO NFPA 1901

If, at the time of delivery, the apparatus manufacturer is not in compliance, a statement of exceptions must be provided as follows:

- The specific standard affected.
- A statement describing why the manufacturer is not in compliance.
- A description of the remedy, and who the responsible party is.

The document must be signed by an officer of the company, and an authorized agent of the purchaser. NO EXCEPTIONS

QUALITY AND WORKMANSHIP

The design of the apparatus must embody the latest approved automotive engineering practices.

The workmanship must be the highest quality in its respective field. Special consideration shall be given to the following points: Accessibility to various areas requiring periodic maintenance, ease of operation (including both pumping and driving) and symmetrical proportions.

Construction must be rugged and ample safety factors must be provided to carry loads as specified and to meet both on and off road requirements and speed as set forth under "Performance Test and Requirements."

PERFORMANCE TESTS AND REQUIREMENTS

A road test shall be documented with the apparatus fully loaded and a continuous run of ten (10) miles or more shall be made under all driving conditions, during which time the apparatus shall show no loss of power or overheating. The transmission drive shaft or shafts, and rear axles shall run quietly and free from abnormal vibration or noise throughout the operating range of the apparatus. The apparatus, when loaded, shall be approximately 66% on the rear axle. The successful bidder shall furnish a weight certification showing weight on the front and rear axle, and the total weight of the completed apparatus at the time of delivery.

- a. The apparatus must be capable of accelerating to 30 MPH from a standing start within 25 seconds on a level concrete highway without exceeding the maximum governed engine RPM.
- b. The service brakes shall be capable of stopping the fully loaded vehicle within 35 feet from a speed of 25 MPH on a level concrete highway.
- c. The apparatus, fully loaded, shall be capable of obtaining a speed of 50 MPH on a level highway with the engine not exceeding 95% of its governed RPM (full load).
- d. The apparatus shall be tested and approved by a qualified testing agency in accordance with their standard practices for pumping engines.
- e. The contractor shall furnish copies of the Pump Manufacturer's Certification of Hydrostatic Test (if applicable), the Engine Manufacturer's current Certified Brake Horsepower Curve and the Manufacturer's Record of Construction Details.

FAILURE TO MEET TESTS

In the event the apparatus fails to meet the test requirements of these specifications on the first trial, a second trial may be made at the option of the bidder within thirty (30) days of the date of the first trials. Such trials shall be final and conclusive and failure to comply with these requirements shall be cause for rejection. Permission to keep and/or store the apparatus in any building owned or occupied by the purchaser shall not constitute acceptance of same.

EXCEPTIONS TO SPECIFICATIONS

The following specifications shall be strictly adhered to. Exceptions shall be considered if they are deemed equal to or superior to the specifications, provided they are fully explained on a separate page entitled "EXCEPTIONS TO SPECIFICATIONS." Exceptions shall be listed by page and paragraph.

Failure to denote exceptions in the above manner shall result in immediate rejection of the proposal. In addition a general statement taking "TOTAL EXCEPTION" to the specifications shall result in immediate rejection of bid.

GENERAL CONSTRUCTION

The apparatus shall be designed and the equipment mounted with due consideration to distribution of load between the front and rear axles so that all specified equipment, including filled water tank, a full complement of personnel and fire hose shall be carried without injury to the apparatus. Weight balance and distribution shall be in accordance with the recommendations of the International Association of Fire Chiefs and National Fire Association (or American Insurance Association). Certified Laboratories certificate shall be submitted by the manufacturer. Weight of apparatus shall meet all federal axle load laws.

DELIVERY REQUIREMENTS

The apparatus shall be completely equipped as per these specifications upon arrival and on completion of the required tests shall be ready for immediate service in the fire department of the purchaser. Any and all alterations required at the scene of delivery to comply with these specifications must be done at the contractor's expense.

PURCHASER RIGHTS

The Purchaser reserves the right to accept or reject any bid. The purchaser also reserves the right to award in their best interest and reserves the right to waive any formalities.

U.S.A. MANUFACTURER

The entire apparatus shall be assembled within the borders of the Continental United States to insure more readily available parts (without added costs and delays caused by tariffs and customs) and service, as well as protecting the purchaser should legal action ever be required.

MANUFACTURER'S EXPERIENCE

Each manufacturer shall have been in business making similar apparatus for a minimum of seventy-five (75) years and must have had single ownership for more than fifty (50) years.

SINGLE SOURCE WARRANTY

It is required that Sutphen warranty both the chassis and complete apparatus. To eliminate divided responsibility and service, the chassis and body must be Warranty through the Sutphen Manufacturer.

FAMA COMPLIANCE

Manufacturer must be a current member of the Fire Apparatus Manufacturer's Association.

PROPOSAL DRAWING

A general layout drawing depicting the apparatus layout and appearance shall be provided with the bid. The drawing shall consist of left side, right side, frontal and rear elevation views. Apparatus equipped with a fire pump, shall have a general layout view of the pump operators panel scaled the same as the elevation views. The drawing shall be a depiction of the actual apparatus proposed and not of a generic similar product.

APPROVAL DRAWING

After the award of bid and pre-construction conference, a detailed layout drawing depicting the apparatus layout and appearance including any changes agreed upon shall be provided for customer review and signature. The drawing will become part of the contract documents. The drawing shall consist of left side, right side, frontal and rear elevation views. Apparatus equipped with a fire pump, shall have a general layout view of the pump operators panel scaled the same as the elevation views.

WIRING SCHEMATIC

A CD containing wiring diagrams of the apparatus shall be provided at the time of delivery.

-

CHASSIS

The chassis shall be designed and built by the manufacturer with strict standards of quality and service.

DOUBLE FRAME RAILS/SINGLE AXLE

The chassis frame shall be of a ladder type design utilizing industry accepted engineering best practices. The frame shall be specifically designed for fire apparatus use.

Each frame rail shall be constructed of two .375" thick-formed channels. The outer channel shall be 10.188" x 3.50" x .375" and the inner channel (liner) shall be 9.31" x 3.13" x .375".

Over the entire length of the frame rail, the section modulus shall be 31.8 in.³. The resistance to bending moment (RBM) shall be 3,498,000 in./lbs.

Each rail is media blasted to remove scale, oil, and contaminants. This blasting also ensures paint adhesion. Each rail will be primed with Cathacoat 302HB, a high performance, two component, reinforced inorganic zinc-rich primer with proven cathodic protection of steel structures, prior to assembly.

The cross-members shall be constructed of minimum .375" formed channels and have formed gusseted ends at the frame rail attachment. Single axle rear suspensions will utilize 3 piece bolt assembled cross-members at each suspension hanger

.625 inch, grade 8 flange, Huck bolt fasteners shall be used on all permanently attached brackets to the frame to eliminate the need for bolt re-tightening. Additional hardware will be Grade 8 Zinc coated flange head locking fasteners.

A lifetime warranty shall be provided, per manufacturer's written statement.

FRONT TOW EYES, BELOW BUMPER

There shall be two front tow eyes with 3" diameter holes attached directly to the chassis frame, accessible below the front bumper.

TOW EYES, PAINTED FINISH

The front tow eyes shall be painted to match the color of the chassis frame.

REAR TOW EYES

There shall be two tow eyes attached directly to the chassis frame rail and shall be chromate acid etched for superior corrosion resistance and painted to match the chassis.

STEERING

The steering system shall be a TRW wheel to wheel steering system that is tested and certified by TRW, consisting of a heavy duty TRW/Ross Model TAS-85 power steering gear, TRW PS36 steering pump, miter box, drag links, and a thermostatic controlled fan cooled system (set point 185 deg. F to 170 deg. F). The steering gear shall be bolted to the frame at the cross-member for steering linkage rigidity. Four (4) turns from lock to lock with an 18" diameter slip resistant rubber covered steering wheel. Steering column shall have six-position tilt and 2" telescopic adjustment. The cramp angle shall be 45 degrees with 315mm tires or 43 degrees with 425mm tires providing very tight turning ability.

DRIVE LINE

The driveline shall consist of Spicer 1810 series dual grease fitting universal joints with "half-round" end yokes. The drive shaft shall be built with a heavy-duty steel tube 4.095" outside diameter x .180 wall thickness. The shafts shall be dynamically balanced prior to installation into the chassis. A splined slip joint shall be provided in each shaft assembly. Universal joints shall be extended life. There shall be two (2) Zerk fittings in each universal joint assembly so the joint can be greased without turning the shaft.

ENGINE

The apparatus shall be powered by a Cummins Diesel X 12 455 HP @ 1600 R.P.M., 1550 ft. lb. torque @ 1000 R.P.M.

Displacement: 11.8 liter displacement.

Cylinders: 6

Bore: 5.2" (132mm)

Stroke: 5.67" (144mm)

AIR COMPRESSOR

The air compressor shall be an 18.7 CFM engine driven Wabco.

STARTER

A 12-volt starter shall be provided, controlled by a switch on the left lower cab dash.

EXHAUST SYSTEM

The engine exhaust system shall include the following components:

- Diesel Particulate Filter (DPF)
- Diesel Oxidation Catalyst (DOC)
- Diesel Exhaust Fluid (DEF)
- Selective Catalytic Reduction Filter (SCR)

The SCR catalyst utilizes the DEF fluid, which consists of urea and purified water, to convert NOx into nitrogen and water. This shall meet or exceed 2017 EPA emissions requirements.

The engine exhaust system shall be horizontal design constructed from heavy-duty truck components. The exhaust tubing shall be stainless steel to the DPF through to the SCR, aluminized steel from the SCR to the exhaust tip. A heavy duty stainless steel bellows tube shall be used to isolate the exhaust system from the engine. The system shall be equipped with single canister consisting of a Diesel Oxidation Catalyst (DOC) and a Diesel Particulate Filter (DPF), and shall be mounted under the right side frame rail, meeting the specific engine manufacturer's specifications and current emission level requirements. The outlet shall be directed to the forward side of the rear wheels, exiting the right side with a heavy duty heat diffuser. The heat diffuser shall prevent the exhaust temperature from exceeding 851 deg. F during a regeneration cycle. A heat-absorbing sleeve shall be provided on the exhaust pipe in the engine compartment area to reduce the heat, protect the alternator, and also to protect personnel while servicing the engine compartment.

AFTER TREATMENT SYSTEM

To meet EPA requirements of Particulate output, a DPF (Diesel Particulate Filter) is used. To meet EPA requirements of Nitrous Oxide output an SCR (Selective Catalytic Reduction) system utilizing DEF (Diesel Exhaust Fluid) is used.

ON-BOARD DIAGNOSTIC (OBD) SYSTEM

The engine shall be equipped with an on-board diagnostic (OBD) system which shall monitor emissions-related engine systems and components and alert the operator of any malfunctions. The OBD system is designed to further enhance the engine and operating system by providing early detection of emission-related faults. The engine control unit (ECU) will manage smart sensors located throughout the engine and

after-treatment system. The system shall monitor component verification and sensor operation. There shall be warning lights located in the dash instrument panel to alert the operator of a malfunction. A data port shall be provided under the driver's side dash for the purpose of code reading and troubleshooting. All communication shall be provided through the J1939 data link.

ENGINE WARRANTY

The engine shall have a five (5) year or 100,000 mile warranty and approval by Cummins Diesel for Full Engine Coverage Plan (RVF) – which is their most complete engine coverage plan, which includes EGR components installation in the chassis. There shall be no deductible for the first two years. A one hundred dollar deductible shall apply for service beginning the third year.

AIR CLEANER/INTAKE

The engine air intake and filter shall be designed in accordance with the engine manufacturer's recommendations. It shall be 99.9% effective in removing airborne contaminants when tested per the industry standard SAE J726 procedure and offer a dirt holding capacity of at least 3.0 gm/cfm of fine dust (tested per SAE J726) offering superior engine protection.

The air filter shall be located at the front of the apparatus and shall be at least 66" above the ground, to allow fording deep water in an emergency situation.

An ember separator shall be provided in the engine air intake meeting, the requirements of NFPA 1901.

An Air Restriction warning light shall be provided and located on the cab dash.

PRIMARY FUEL FILTER/WATER SEPARATOR

A Cummins approved Fleetguard Fuel Pro FH230 fuel filter/water separator shall be remote mounted to the chassis frame rail.

12VDC HEATER

A 12V DC heater shall be provided for the Fleetguard Fuel Pro FH230 fuel filter/water separator.

SECONDARY FUEL FILTER

A Cummins approved Fleetguard FF5776 fuel filter will be mounted on the driver's side of the engine.

MINI DATA LINK ADAPTER

A Cummins INLINE mini Bluetooth-enabled Vehicle Datalink Adapter for Heavy Duty vehicles shall be provided. This allows a mobile device to communicate wirelessly with on-board Electronic Control Module (ECM) for vehicle subsystems (e.g., engine, transmission, brake system). The INLINE mini has an integrated 9-pin connector that plugs directly into the SAE J1939-13 diagnostic connector on the vehicle.

Dimensions: 3.1" x 1.6" x 1.6" (78 x 41 x 41 mm)

Weight: 4.1 oz. (120 g) Packaged: 1.7 oz. (50 g)

Power Requirement: 6-32 VDC, 0.3A max

Operating Temperature: -20 to +50 °C

Storage Temperature: -40 to +70 °C

Protocols Supported:

SAE J1939 (250 or 500 Kb/s)

CAN (250 or 500 Kb/s)

ISO15765 (500 Kb/s)

SAE J1708/J1587 (9600 b/s)

Processor: MCF52258 ColdFire (32-bit, 64MHz)

Memory: RAM: 576 KB FLASH: 2.5 MB

Bluetooth: 4.2 BR/EDR Class 1.5 (15mW)

Connector Pin Assignments:

A – GND

B – V--BATT (12/24 VDC)

C – CAN_H

D – CAN1_L

E – No Connection

F – CAN3_H or J1708(+)

G – CAN3_L or J1708(-)

H – CAN2_H

J – CAN2_L

Wireless Certifications: FCC (US), IC (Canada), CE (European Union), and Australia

EMC Certifications: EN 301 489-1:V1.9.2 (2011-09), EN 301 489-17:V2.2.1 (2012-09)

Safety Certifications: EN 60950-1:2006 (2nd Ed.) + Am 1:2010 + Am 2:2013

Part Number: 529990900

TRANSMISSION

The chassis shall be equipped with a Generation 5 Allison EVS4000 six (6) speed automatic transmission. It shall be programmed five (5) speed, sixth gear locked out, for fire apparatus vocation, in concert with the specified engine.

The transmission is communicated on the J-1939 through the communication port. The fifth gear shall be an overdrive ratio, permitting the vehicle to reach its top speed at the engine's governed speed. The dipstick is dipped in a rubber coating for ease in checking oil level when hot.

The chassis to transmission wiring harness shall utilize Metri-Pack 280 connectors with triple lip silicone seals and clip-type positive seal connections to protect electrical connections from contamination without the use of coatings.

Ratings: Max Input (HP) 600
Max Input (Torque) 1850 (lb ft)
Max Turbine (Torque) 2600 (lb ft)

Mechanical Ratios: 1st - 3.51:1
2nd - 1.91:1
3rd - 1.43:1
4th - 1.00:1
5th - 0.74:1
Reverse - -5.00:1

TRANSMISSION FLUID

The transmission shall come filled with an Allison approved Synthetic Transmission Fluid that meets the Allison TES-295 specification.

*The customer will have a scan from Allison submitted to them for approval.

ENGINE BRAKE

The engine shall be equipped with a Jacobs compression engine brake. An "On/Off" switch and a control for "Low/Medium/High" shall be provided on the instrument panel within easy reach of the driver.

The engine brake shall interface with the Wabco ABS brake controller to prevent engine brake operations during adverse braking conditions.

A pump shift interlock circuit shall be provided to prevent the engine brake from activating during pumping operations.

The brake light shall activate when the engine brake is engaged.

TRANSMISSION COOLER

The apparatus transmission shall be equipped with a Liquid-To-Liquid remote mounted cooler with aluminum internal components. The cooler shall be encased in an aluminum housing and mounted to the outside of the officer's side frame rail for accessibility and ease of service.

TRANSMISSION SHIFTER

An Allison "Touch Pad" shift selector shall be mounted to the right of the driver on the engine cover accessible to the driver. The shift position indicator shall be indirectly lit for nighttime operation.

COOLING SYSTEM

The cooling system shall be designed to keep the engine properly cooled under all conditions of road and pumping operations. The cooling system shall be designed and tested to meet or exceed the engine and transmission manufacturer's requirements, and EPA regulations.

The complete cooling system shall be mounted in a manner to isolate the system from vibration and stress. The individual cores shall be mounted in a manner to allow expansion and contraction at various rates without inducing stress to the adjoining core(s).

The cooling system shall be comprised of a charge air cooler to radiator serial flow package that provides the maximum cooling capacity for the specified engine as well as serviceability. The main components shall include a surge tank, a charge air cooler, bolted to the top of the radiator to maximize cooling, recirculation shields, a shroud, a fan, and required tubing. All components shall consist of an individually sealed system.

RADIATOR

The radiator shall be a cross-flow design constructed completely of aluminum with welded side tanks. The radiator shall be bolted to the bottom of the charge air cooler to allow a single depth core, thus allowing a more efficient and serviceable cooling system.

The radiator shall be equipped with a drain cock to drain the coolant for serviceability. The drain cock shall be located at the lowest point of the aluminum cooling system to maximize draining of the system.

CHARGE AIR COOLER

The charge air cooler shall be of a cross-flow design and constructed completely of aluminum with extruded tanks. The charge air cooler shall be bolted to the top of the radiator to allow a single depth core.

COOLANT

The cooling system shall be filled with a 50/50 mix. The coolant makeup shall contain ethylene glycol and de-ionized water to prevent the coolant from freezing to a temperature of -34 degrees F.

HOSES & CLAMPS

Silicone hoses shall be provided for all engine coolant lines.

All radiator hose clamps shall be spring loaded stainless steel constant torque hose clamps for all main hose connections to prevent leaks. Recirculation shields shall be installed where required to prevent heated air from reentering the cooling package and affecting performance.

FAN

The engine cooling system shall incorporate a heavy-duty composite 11- blade Z-series fan. It shall provide the highest cooling efficiently while producing the lowest amount of noise. This robust yet light-weight fan results in less wear and stress on motors and bearings.

A shroud and recirculation shield system shall be used to ensure air that has passed through the radiator is not drawn through again.

The fan tip to radiator core clearance shall be kept at a minimal distance to increase the efficiency of the fan and reduce fan blast noise.

FAN CLUTCH

A fan clutch shall be provided that shall allow the cooling fan to operate only when needed. The fan shall remain continuously activated when the truck is placed in pump gear.

SURGE TANK

The cooling system shall be equipped with an aluminum surge tank mounted to the officer's side of the cooling system core. The surge tank shall house a low coolant probe and sight glass to monitor the coolant level. Low coolant shall be alarmed with the check engine light. The surge tank shall be equipped with a dual seal cap that meets the engine manufacturer's pressure requirements, and system design requirements.

The tank shall allow for expansion and to remove entrained air from the system. There shall also be an extended fill neck to prevent system overflow and encroachment of expansion air space. Baffling shall be installed in the tank to prevent agitated coolant from being drawn into the engine cooling system.

FUEL TANK

The chassis shall be equipped with a 65-gallon stainless steel rectangular fuel tank. The fuel tank shall be certified to meet FMVSS 393.67 tests. It shall also maintain engine manufacturer's recommended expansion room of 5%.

The tank shall be removable by means of six (6) bolted connections and dropped. One (1) tank baffle shall be used.

Dual pick-up and return ports with a single 3/4" tank drawtube shall be provided for diesel generators if required.

The fuel lines shall be nylon braid reinforced fuel hose with brass fittings. The lines shall be carefully routed along the inside of the frame rails. All fuel lines are covered in high temperature rated split plastic loom. Single suction and return fuel lines shall be provided.

The fuel tank shall be mounted in a saddle with a barrier between the tank and the saddle. The bottom of the fuel tank shall contain a 1/2" drain plug.

FUEL FILL

The fuel tank shall be equipped with a 2-1/4" filler neck assembly with a 3/4" vent located on the driver's side of the truck. A fuel fill cap attached with a lanyard shall be provided.

FUEL COOLER

Installed on the apparatus fuel system shall be an Air-To-Liquid aluminum fuel cooler. The fuel cooler shall be located in the lowest module of the cooling system.

DIESEL EXHAUST FLUID TANK

The exhaust system shall include a molded cross linked polyethylene tank. The tank shall have a capacity of 5 usable gallons and shall be mounted on the left side of the chassis frame.

The DEF tank fill neck shall accept only a 19mm dispensing nozzle versus the standard 22mm diesel fuel dispensing nozzle to prevent cross contamination. The DEF tank cap shall be blue in color to further prevent cross contamination.

A placard shall accompany fill location noting DEF specifications.

ALTERNATOR

A 420 ampere Prestolite/Leece Neville alternator with serpentine belt shall be provided. The alternator shall generate 260 amperes at idle.

A low voltage alarm, audible and visual, shall be provided.

LOW VOLTAGE ALARM

A Floyd Bell TXB-V88-515-QF low voltage alarm, audible and visual, shall be provided.

BATTERIES

The battery system shall be a single system consisting of four (4) negative ground, 12 volt Interstate Group 31 MHD batteries, cranking performance of 950 CCA each with total of 3800 amps, 185 minute reserve capacity with 25 ampere draw at 80 degrees Fahrenheit. Each battery shall have 114 plates. The batteries shall include a one-year warranty which shall be accepted nationwide.

The batteries shall be installed in a vented 304 stainless steel battery box with a removable aluminum cover to protect the batteries from road dirt and moisture. The battery cover shall be secured with four "T" handle

rubber hold downs to provide easy access for maintenance and inspection. Stainless steel hardware will be used for installation. The batteries are to be placed on dri-deck and secured with a fiberglass hold down. The batteries shall be wired directly to starter motor and alternator.

The battery cables shall be 3/0 gauge. Battery cable terminals shall be soldering dipped, color-coded and labeled on heat shrink tubing with a color-coded rubber boot protecting the terminals from corrosion.

There shall be a 350-ampere fuse protecting the pump primer and a 250-ampere fuse protecting the electric cab tilt pump and other options as required.

BATTERY JUMPER TERMINAL

There shall be one set (two studs) of battery jumper terminals located by the battery box under the cab. The terminals shall have plastic color-coded covers. Each terminal shall be tagged to indicate positive/negative.

120V SHORELINE INLET & AUTO EJECT

The apparatus shall be equipped with a 120V shoreline inlet to provide power to the battery charger from an external source. The inlet shall include a Kussmaul 091-159-30-120 Super 30 Auto Eject featuring a 12 volt solenoid which shall eject the shoreline cord away from vehicle path upon sensing engine start. After ejection, a weatherproof cover shall snap into position over inlet.

A 30 amp connector shall be provided and shipped loose for connecting the external shoreline cord to the inlet.

120-VOLT OUTLETS WIRED TO SHORELINE INLET

Two 120-volt outlets shall be provided and wired to the shoreline inlet. The location of the outlet shall be determined during the pre-construction conference.

BATTERY CHARGER

An IOTA DLS-45 45 amp battery charger with IQ-3 controller shall be provided and installed in the cab. The charger shall be wired to the 120V shoreline inlet.

INDICATOR LIGHT

A green indicator light shall be provided for the battery charger.

FRONT AXLE

A Hendrickson STEERTEK NXT non-driving, front steer axle with a capacity of 20,000 pound shall be provided. The axle shall have a 3.74" drop and will have a fabricated boxed shaped cross section, a one piece knuckle, and serviceable king pin. Adjustable Ackerman settings shall be available, and determine based on wheelbase. The axle shall have 10 bolt hub piloted, and furnished with oil seals.

SUSPENSION (FRONT)

The front suspension shall be a parabolic taper-leaf spring design, 56" long and 4" wide. Long life, maintenance free, threaded pin bushings in spring shackles shall be utilized. All spring and suspension mounting shall be attached directly to frame with high strength Huck bolts and self-locking round collars. Progressive rate bump stop and custom tuned passive hydraulic damper shall be supplied. NO EXCEPTIONS.

STEER ASSIST

The steer assist provides driver assistance when turning the vehicle left or right while traveling.

FRONT TIRES

FRONT TIRES GOODYEAR 425/65R22.5 LRL G296 HGW 22.5 X 12.25 WHEELS 23,000 GVW Rating.

REAR AXLE

The rear axle shall be a Meritor™ RS-26-185 Single reduction drive axle with a capacity of 27,000 lbs. The axles shall be hub piloted, 10 studs, furnished with oil seals.

TOP SPEED

The top speed shall be approximately 68 MPH.

SUSPENSION (REAR)

27,000 LB AIR RIDE

A Hendrickson FIREMAAX model FMX272 air ride rear suspension shall be provided. The suspension shall be a dual air spring design equipped with dual height control valves to maintain proper ride height. To reduce axle stress and maintain axle position and pinion angle the suspension design shall incorporate three torque rods. The ground rating of the suspension shall be 27,000 pounds.

REAR TIRES

Rear tires shall be Goodyear 12R22.5, load range H, G622 Mud and Snow tread, dual tubeless type with a GAWR up to 27,000 pounds. Wheels shall be disc type, hub piloted, 22.5 x 8.25 10 stud with 11.25" bolt circle.

TIRE PRESSURE MONITOR

A Quick Pressure mechanical tire pressure sensor/indicator shall be provided for each wheel. The pressure sensor shall indicate if the tire is properly inflated. Each indicator shall have a green & red display visible inside a sight glass on the sensor. Full green indicates that the pressure is correct. Partial green/red indicates that the tire is under inflated by as little as 10%. Full red indicates that the tire is under inflated by 25% or more. The indicators shall replace the standard valve stem caps. A total of six (6) indicators shall be provided.

WHEELS

The front and rear wheels shall be ACCURIDE® brand aluminum. ACCU-SHIELD™ finish shall be provided on the front and outside-rear wheels.

The same finish shall be provided on the inside-rear wheels.

HUB COVERS

Polished stainless steel hub covers shall be provided for the front and rear axle.

LUG NUT CAPS

Chrome plated lug nut caps shall be provided for the front and rear wheels.

FRONT MUD FLAPS

Hard rubber mud flaps shall be provided for front tires.

REAR MUD FLAPS

Hard rubber mud flaps shall be provided for rear tires.

BRAKES, Front

The front brakes shall be Arvin Meritor DiscPlus EX225 Air Disc Brakes. Each disc brake assembly shall include one (1) 17" vented rotor, one (1) lightweight hub, one (1) twin-piston caliper, and two (2) quick-change pads.

BRAKES, Rear

The rear brakes shall be Meritor S-cam style. They shall be 16.5" x 8.625" with heavy duty return springs, and a double anchor pin design. They shall also have quick change shoes for fast easy brake relining.

AIR BRAKE SYSTEM

The vehicle shall be equipped with air-operated brakes. The system shall meet or exceed the design and performance requirements of current FMVSS-121 and test requirements of current NFPA 1901 standards.

Each wheel shall have a separate brake chamber. A dual treadle valve shall split the braking power between the front and rear systems.

All main brake lines shall be color-coded nylon type protected in high temperature rated split plastic loom. The brake hoses from frame to axle shall have spring guards on both ends to prevent wear and crimping as they move with the suspension. All fittings for brake system plumbing shall be brass.

A Meritor Wabco System Saver 1200 air dryer shall be provided.

The air system shall be provided with a rapid build-up feature, designed to meet current NFPA 1901 requirements. The system shall be designed so the vehicle can be moved within 60 seconds of startup. The quick build up system shall provide sufficient air pressure so that the apparatus has no brake drag and is able to stop under the intended operating conditions following the 60-second buildup time. The vehicle shall not be required to have a separate on-board electrical air compressor or shoreline hookup to meet this requirement.

Four (4) supply tanks shall be provided. One air reservoir shall serve as a wet tank and a minimum of one tank shall be supplied for each the front and rear axles. A Schrader fill valve shall be mounted in the front of the driver's step well.

A spring actuated air release emergency/parking brake shall be provided on the rear axle. One (1) parking brake control shall be provided and located on the engine hood next to the transmission shifter within easy reach of the driver. The parking brake shall automatically apply at 35 ± 10 PSI reservoir pressure. A Meritor WABCO IR-2 Inversion Relay Valve, supplied by both the Primary and Secondary air systems, shall be used to activate the parking brake and to provide parking brake modulation in the event of a primary air system failure.

Accessories plumbed from the air system shall go through a pressure protection valve and to a manifold so that if accessories fail they shall not interfere with the air brake system.

AUTOMATIC HEATED MOISTURE EJECTORS

Each air tank in the chassis braking system shall consist of a heated automatic moisture ejector to assist in keeping the air tanks and air lines free of debris and moisture. A manual pull cable shall be incorporated.

AIR OUTLET

One (1) air chuck shall be provided at a customer specified location. The system shall tie into the wet tank of the brake system and include an 85-psi pressure protection valve in the outlet line to prevent the brake system from losing all air.

Note: Purchaser to specify type of hose fitting.

AIR INLET

An air system inlet/fill connection shall be provided. The inlet shall be connected to the air brake to allow constant air feed. The location of the inlet shall be on the left hand side of the driver's step well.

ELECTRONIC STABILITY CONTROL SYSTEM

An Arvin Meritor / Wabco Electronic Stability Control (ESC) system shall be provided and installed. The ESC system continually monitors the vertical acceleration, and yaw (horizontal plain rotation) of the vehicle, and compares it to a critical threshold where vehicle rollover may occur. When the critical threshold is met, the ESC shall intervene by reducing engine torque and engaging the engine retarder, while automatically applying both the steering and drive axle brakes as needed. In many cases, activation occurs before the driver is even aware it is needed.

AIR BRAKING ABS SYSTEM

A Wabco ABS system shall be provided to improve vehicle stability and control by reducing wheel lock-up during braking. This braking system shall be fitted to axles and all electrical connections shall be environmentally sealed from water and weather and be vibration resistant.

The system shall constantly monitor wheel behavior during braking. Sensors on each wheel transmit wheel speed data to an electronic processor, which shall sense approaching wheel lock and instantly modulate brake pressure up to 5 times per second to prevent wheel lock-up. Each wheel shall be individually controlled. To improve field performance, the system shall be equipped with a dual circuit design. The system circuits shall be configured in a diagonal pattern. Should a malfunction occur, that circuit shall revert to normal braking action. A warning light at the driver's instrument panel shall indicate malfunction to the operator.

The system shall consist of a sensor clip, sensor, electronic control unit and solenoid control valve. The sensor clip shall hold the sensor in close proximity to the tooth wheel. An inductive sensor consisting of a permanent magnet with a round pole pin and coil shall produce an alternating current with a frequency proportional to wheel speed. The unit shall be sealed, corrosion-resistant and protected from electro-magnetic interference. The electronic control unit shall monitor the speed of each wheel sensor and a microcomputer shall evaluate wheel slip in milliseconds.

AUTOMATIC SLIP RESPONSE

The Rockwell/Wabco 4 Channel Anti-lock braking system shall be provided. The system shall be supplied with (ASR) Automatic slip response. The ASR controls slip under acceleration.

ASR SWITCH

An on/off switch for the Acceleration Slip Resistance shall be provided on the dash. This will allow the driver to override the computer and turn the ASR on when at a higher speed for better traction in deep snow or mud.

COMPRESSION FITTINGS ON AIR SYSTEM

All air line fittings installed on the chassis shall be compression style fittings.

The following locations shall utilize push-on fittings:

- Pressure protection valve (accessory block)
- Double check valve (braking system, park brake)
- One way check valve (brake valve tank)
- Elbow Male Modified 1/4" tube x 1/4" MP (low air switch)
- Elbow Male 1/4" tube x 3/8"MP (brake pedal solenoid)
- Connector 1/4" x 3/8"MPT (brake pedal solenoid)
- Switch stoplight (Wabco sealed switch/brake light and service brake switch)
- Low pressure switch (PTC) (Wabco sealed switch/low air switch)

MISCELLANEOUS CHASSIS EQUIPMENT

Fluid capacity plate affixed below driver's seat.

Chassis filter part number plate affixed below driver's seat.

Maximum rated tire speed plaque near driver.

Tire pressure label near each wheel location.

Cab occupancy capacity label affixed next to transmission shifter.

Do not wear helmet while riding plaque for each seating position.

NFPA compliant seat belt and standing warning plates provided.

ALUMINUM CAB

The cab shall be a full tilt 8-person 20" rear raised roof cab designed specifically for the fire service and manufactured by the chassis builder. Apparatus cabs that are not manufactured by the apparatus manufacturer shall not be acceptable.

CAB DESIGN

The apparatus chassis shall be of an engine forward, fully enclosed tilt cab design. There shall be four (4) side entry doors.

The cab shall be of a fully open design with no divider wall or window separating the front and rear cab sections. The cab shall be designed in a manner that allows for the optimum forward facing vision for crew. Cab designs that utilize roof mounted air conditioning units, are not desired.

The cab shall be constructed of high strength 5052H32 aluminum plate welded to 6061-T6 extruded aluminum framing.

The cab roof shall utilize 5" x 5" honeycomb re-enforced 6061 T6 aluminum extrusion, with fully radiused outer corner rails with integral drip channel and 6061 T6 ¾" x 2" x 3/16" aluminum box tubing type cross brace supports. Structures that do not include an integral drip channel will not be accepted. The box tubing type cross brace supports shall be installed in a curved fashion beginning from the midline of the apparatus cab and curving toward the exterior corner rails. This curvature will allow for increased strength in the event of a roll over while not allowing for rainwater buildup on the apparatus cab roof.

The cab sides shall be constructed from 1 ½" x 3" x 3/16" 6061 T6 extruded door pillars and posts that provide a finished door opening, extruded and formed wheel well openings supports, formed aluminum wheel well liners and box tubing type support braces.

The cab floor and rear cab wall shall utilize 1 ¾" x 4" x 3/16" 6061 T6 extruded box tubing type framing and support bracing.

The framework shall be of a welded construction that fully unitizes the structural frame of the cab.

The structural extrusion framework shall be overlaid with interlocked aluminum alloy sheet metal panels to form the exterior skin of the cab. The cab sides shall be constructed of 3/16" thick 5052H32 aluminum plate that slides into an integral channel of the extrusion framework. The plate is then skip welded into that channel to allow for tolerable flex while the apparatus travels down the roadway. Cab designs that utilize 1/8" thick aluminum for the cab sides shall not be acceptable.

The structural extrusion framework shall support and distribute the forces and stresses imposed by the chassis and cab loads and shall not rely on the sheet metal skin for any structural integrity.

The cab face extrusion framework shall be overlaid with 1/8" thick 5052H32 aluminum plate to allow for an aesthetically pleasing radiused cab face.

CAB SUB-FRAME

The cab shall be mounted to a 4" x 4" x 3/8" steel box tube sub-frame, and shall be isolated from the chassis, through the use of no less than six (6) elastomeric bushings. This substructure shall be completely independent of the apparatus cab. The sub frame shall be painted to match the primary chassis color.

The sub-frame shall be mounted to the chassis through the use of lubricated Kaiser Bushings for the front pivot point, and two (2) hydraulically activated cab latches, to secure the rear.

Cab mounting that does not include a sub-frame shall not be considered. NO EXCEPTIONS.

CAB DIMENSIONS

The cab shall be designed to satisfy the following minimum width and length dimensions:

Cab Width (excluding mirrors) 98"

Cab Length (from C/L of front axle)

To front of cab (excluding bumper) 68"

To rear of cab 73"

Total Cab Length (excluding bumper) 141"

ROOF DESIGN

The cab shall be of a one-half 20" raised roof design with side drip rails and shall satisfy the following minimum height dimensions:

Cab Dimensions Interior

Front 59"

Rear 75"

Cab Dimensions Exterior

Front 65"

Rear 85"

FENDER CROWNS

Polished stainless steel front axle fenderettes with full depth radiused wheel well liners shall be provided.

CAB INSULATION

The exterior walls, doors, and ceiling of the cab shall be insulated from the heat and cold, and to further reduce noise levels inside the cab. The cab interior sound levels shall not exceed 90 decibels at 45 mph in all cab seat positions. NO EXCEPTIONS

EXTERIOR GLASS

The cab windshield shall be of a two piece curved design utilizing tinted, laminated, automotive approved safety glass. The window shall be held in place by an extruded rubber molding. The cab shall be finished painted prior to the window installation.

SUN VISORS

The sun visors shall be made of dark smoke colored transparent polycarbonate. There shall be a visor located at both the driver and officer positions, recessed in a molded form for a flush finish.

CAB STRUCTURAL INTEGRITY

The cab of the apparatus shall be designed and so attached to the vehicle as to eliminate, to the greatest possible extent, the risk of injury to the occupants in the event of an accident.

The apparatus cab shall be tested to specific load and impact tests with regard to the protection of occupants of a commercial vehicle.

A test shall be conducted to evaluate the frontal impact strength of the apparatus cab to conform to the test J2420 and the "United Nations Regulation 29, Annex 3, paragraph 4, (Test A). A second test shall be conducted to evaluate the roof strength of the apparatus cab to conform to the Society Of Automotive Engineers (SAE) SAE J2422/SAE J2420 and "United Nations Regulation 29, Annex 3, paragraph 5, (Test B) and SAE J2420. The evaluation shall consist of the requirements imposed by ECE Regulation 29, Paragraph 5.

The test shall be conducted by a certified independent third party testing institution.

A letter stating successful completion of the above test on the brand of cab being supplied shall be included in the bid. There shall be "no exception" to this requirement.

SEAT BELT TESTING

The seat belt anchorage system shall be tested to meet FMVSS 207 Section 4.2a and FMVSS 210 section 4.2. Testing shall be conducted by an independent third party product evaluation company.

A copy of the certification letter shall be supplied with the bid documents.

CAB LOCKDOWN LATCHES

Cab lockdown latches shall be provided with an interlock switch tied to a component as specified. A LED indicator light shall be located in the cab. Once the component's path is clear and the cab tilt switch is engaged, the cab latches will be released to allow the cab to be tilted.

CAB TILT SYSTEM

An electrically powered hydraulic cab tilt system shall be provided and shall lift the cab to an angle of 45 degrees, exposing the engine and accessories for fluid checks and service work. The system shall be interlocked to only operate when the parking brake is set.

The lift system shall be comprised of two (2) hydraulic lift cylinders, an electrically driven hydraulic pump, and a control switch. The hydraulic pump shall be located on the exterior of the frame rail on the driver's side of the chassis that can be easily accessible when the cab is tilted. A mechanical locking system consisting of an air operated actuator and a heavy radiused wall 3" x 3" aluminum extrusion will be provided to ensure the cab remains in the raised position in the event of a hydraulic failure. Additionally, each of the hydraulic lift cylinders shall incorporate a check valve, and velocity fuses that will activate should a sudden drop in pressure be detected. The cab tilt controls shall be interlocked to the parking brake to ensure the cab will not move, unless the parking brake is set. The cab tilt controls will consist of a momentary raise/lower switch and a two position cab safety lock switch.

The hydraulic lift cylinders will be connected to a steel cab sub-frame, and not directly to the cab. NO EXCEPTIONS

MANUAL CAB LIFT

There shall be a manually operated hydraulic pump for tilting the cab in case the main pump should fail. Access to the pump shall be located under the left corner of the front bumper.

BARRIER STYLE CAB DOORS

Barrier style cab doors shall be provided. The lower part of the door shall be removed to expose the cab entry step well.

The cab doorframes shall be constructed from 6061 T6 aluminum extrusions fitted with a 5052 H32 aluminum sheet metal skin and shall be equipped with dual weather seals. The outside cab door window opening shall be framed by a black anodized aluminum trim, to provide a clean appearance. The cab doors shall be equipped with heavy-duty door latching hardware, which complies with FMVSS 206. The door latch mechanism shall utilize control cable linkage for positive operation. A rubber coated nylon web doorstop shall be provided.

The doors shall be lap type with a 10 gauge full-length stainless steel flange and 3/8" diameter hinge pin and shall be fully adjustable.

All openings in the cab shall be grommeted or equipped with rubber boots to seal the cab from extraneous noise and moisture.

The cab doors shall be designed to satisfy the following minimum opening and step area dimensions:

Door Opening:

Front	36.5" x 73"
Rear	36.5" x 73"

STEP WELLS

The lower cab step wells shall be sprayed with a black Raptor urethane blend. The back and side walls of the step well shall also be lined with 1/8" aluminum treadplate.

CAB STEPS

The lower cab steps shall be no more than 22" from the ground. Grip strut material shall be installed on the stepping surface.

An intermediate step shall be provided, mid way between the lower cab step, and the cab floor. The intermediate step shall be slightly inset to provide for safer ingress and egress. Diamondplate material shall be installed on the stepping surface.

All steps shall be covered with material that meets or exceeds the NFPA requirements for stepping surfaces.

AUXILIARY CAB STEPS

There shall be one additional step under each cab door to assist with entrance and exit of the cab. The steps shall be constructed of aluminum with a grip strut stepping surface.

STEP LIGHTS

A white TecNiq E41 LED strip light shall illuminate each interior cab step. These lights shall illuminate whenever the battery switch is on and the cab door is opened.

POWER WINDOWS

All four cab entry doors shall have power windows. Each door shall be individually operated and the driver's position shall have master control over all windows. All four windows shall roll down completely.

CAB REAR WALL WALK THRU, FOR ACCESS TO HEAVY RESCUE/HAZMAT BODY

The cab rear wall shall have a reinforced cutout, approximately 24"W x 72"H from the cab floor, depending on body specifications, to provide a walk thru to and from the cab to the body.

WINDSHIELD WIPERS

Two (2) black anodized finish two speed electric windshield wiper system. Dual motors with positive parking. System includes large dual arm wipers with built in washer system. One (1) master control works the wiper, washer and intermittent wipe features. Washer bottle is a remote fill with a 4 quart capacity. Washer fill is located just inside of officer cab door.

MIRRORS

Two (2) Lang Mekra 300 Series smooth chrome plated Aero style main and convex mirrors shall be installed on each side of the vehicle. The main mirror shall be 4-way remote adjustable with heat, 7" x 16" 2nd surface chromed flat glass. The convex shall be 6" x 8" 2nd surface chromed 400 mm radius glass. Each mirror housing assembly shall be constructed of lightweight textured chrome ABS with on truck glass and housing back cover replacement. In the event the mirror breaks the glass shall be replaceable in (3) minutes or less. The glass shall include a safety adhesive backing to keep broken glass in place. The mirror assembly shall be supported by a "C" loop bracket constructed of polished stainless steel tube utilizing two point mounting reducing vibration of mirror glass during normal vehicle operation. The lower section of the holder shall

include a spring loaded single detent position 20 degrees forward with easy return to operating position without refocusing.

MIRROR, BLIND SPOT

One (1) Velvac 8" diameter exterior blind spot mirror assembly shall be provided and mounted on the brow of the cab, officer's side.

UPPER GRILLE

The front of the cab shall be equipped with a raised polished stainless steel grille with sufficient area to allow proper airflow into the cooling system and engine compartment. Plastic chrome plated grilles shall not be acceptable.

UPPER GRILLE LOGO

The upper grille shall have a laser cut flaming "S" logo in the upper portion of the grille. The cut out shall contain reflective material behind.

LOWER GRILLE

The front of the cab shall be equipped with a polished stainless steel lower grille. The design shall allow proper airflow into the cooling system and engine compartment. Plastic chrome plated lower grille shall not be acceptable.

PAINTED STEEL BUMPER

There shall be a 10" high painted formed steel wrap-around (45 degree) bumper provided at the front of the apparatus. The bumper shall be mounted to a reinforcement plate constructed of 1/4" x 10" x 70" carbon steel. The frame rail extension shall be a reinforced four-sided boxed frame rail for superior safety protection. A gravel shield shall be provided, constructed of .188" aluminum diamond plate. The bumper extension shall be approximately 18".

BUMPER SIDES

The sides of the bumper shall also be painted steel in lieu of diamond plate. Each side shall feature a recessed painted steel pocket for the marker light and any auxiliary lighting option selected. The pocket shall be a welded integral part of the bumper skin.

STORAGE WELL COMPARTMENT

There shall be a hose well compartment located in the center of the front bumper. The compartment shall be approximately 32" long x 10" wide x 12" deep. The compartment shall be constructed of .125" smooth aluminum plate.

BUMPER TROUGH LIP

The bumper trough shall have a 1" lip around the top of the trough to assist in containing components in the trough as well as reducing allowance of moisture and debris into the trough.

DIAMOND PLATE BUMPER LID

There shall be a 1/8" diamond plate cover with latches provided for the front bumper trough. The cover shall have a 2" rise to accommodate the storage well requirements.

PROTECTIVE BUMPER COATING

A Raptor texture coating shall be provided along the top edge of the front steel bumper. The color of the coating shall be determined at precon.

RECEIVER (Front)

A 2" receiver shall be provided and mounted directly to the apparatus chassis. The receiver shall be 2" x 2" heavy wall tube and solidly re-enforced. The receiver shall be rated with a maximum capacity of 5,000 lbs. The receiver shall be designed for a 2-1 straight pull capacity (10,000lbs).

WIRING

Sufficient power shall be provided at the receiver for the intent of powering a winch.

AIR HORNS

Two (2) Grover 1510 round, 24" long chrome plated, air horns shall provided.

AIR HORN BUMPER CUT-OUTS

The air horns shall be installed thru the front bumper.

AIR HORNS WIRED TO STEERING WHEEL

The air horns shall be wired through the steering wheel button. A selector switch shall be provided on the instrument panel to switch between functions.

LANYARD CONTROL FOR AIR HORNS

The air horns shall be activated by a split "Y" lanyard in cab ceiling.

ELECTRONIC SIREN

One (1) Whelen 295HFSA7 electronic siren shall be installed at the cab instrument panel complete with noise canceling removable microphone. The remote control head shall be flush mounted in a location specified by the fire department.

SIREN SPEAKERS

Two (2) Whelen SA314B 100 watt weatherproof aluminum siren speakers with black epoxy-coated finish shall be provided and wired to the electronic siren.

SPEAKER MOUNTING

The electronic siren speaker(s) shall be installed behind perforations in the front bumper.

MICROPHONE BRACKET

- There will be (3) magnetic mic clips.
- Ship (2) Loose.
- The (2) Loose clips will be mounted at final inspection.
- Magnetic MIC
- Innovative Products, Inc.
- SKU:MM-SU-2012

FEDERAL Q2B SIREN

There shall be a Federal Q2B-NN siren installed on the face of the front bumper. The siren shall be securely mounted and activated by means of a solenoid and shall include a brake. There shall be rubber dock bumpers on each side of the Q2B siren to prevent damage to the siren grille.

- Siren Location = Driver's Side Bumper.
- Wire Q2B siren to only be operable when Emergency Master is on.
- Make sure to install rubber bumpers for Q2B.

FOOT SWITCH, DRIVER'S SIDE

A foot switch for the mechanical siren shall be provided on the driver's side.

MOMENTARY SWITCH ON DASH

A momentary switch for the mechanical siren shall be provided on the officer's side dash.

MASTER Q2B SHUTOFF SWITCH WITH GUARD

A master Q2B power disconnect switch shall be installed in the officer's side entry step. The switch shall be installed on the vertical face of the entry step and be visible when the cab door is opened. The switch shall also be covered with metal guard for protection.

CAB EXTERIOR LIGHTING

Exterior lighting and reflectors shall meet or exceed Federal Motor Vehicle Safety Standards and National Fire Protection Association requirements.

HEADLIGHTS

The front low and high beam headlights shall be FIRETECH model FT-4X6 LED, rectangular shaped, quad style installed in custom rectangular shaped stainless steel housings on the front of the cab. Each housing shall accommodate a forward-facing turn signal in the outboard location and a side-facing warning light.

An additional pair of rectangular shaped stainless steel housings shall be installed on the front of the cab above the headlight housings. Each housing shall accommodate two (2) forward-facing warning lights and a side-facing turn signal.

HEADLIGHT FINISH

The interior components of the headlights shall have a chrome finish.

FRONT TURN SIGNALS

There shall be four (4) Whelen 400 Series Model 40A00AAR LED rectangular amber turn signal lights mounted one (1) each side in the front of the headlight housings and one (1) mounted on the side of each warning light housing.

CORNERING LIGHTS

Two (2) Whelen Model M6 LED cornering lights shall be mounted on the sides of the bumper, one each side. The lights shall come on steady with their coordinating turn signal.

DAYTIME RUNNING LIGHTS

The headlamps shall be provided with a "Daytime Running" feature. The lights shall automatically be switched on when the vehicle ignition is switched on.

DOOR AJAR DISABLE SWITCH

- The purpose of this switch will be to shut off the lights wired to Door Ajar when the doors are open.
- Once the door has been closed and reopened the system will reset and the Door Ajar Lights will work again.
- This is for the M9 Scene Lights.

EXTERIOR CAB HANDRAILS

There shall be three (3) 24" long, handrails provided and installed, one at each front cab entrance, and one on the side opposite of tall exterior compartment. The handrails shall be constructed of type 304 stainless steel 1.25 inch diameter tubing with bright finish and knurled gripping surface. Mounting flanges shall be constructed from 7 gauge, .180 thick, stainless sheet. Each grab rail shall have 90 degree returns to flanges. The ends of grab rail shall pass through the flanges and be welded to form one structural unit. The handrails shall be mounted using 1.25" SS Hex bolts, with a barrier rubber gasket at each flange.

Sufficient space shall allow for a gloved hand to firmly grip the rail.

HANDRAILS, FRONT OF CAB

There shall be a pair of knurled stainless steel handrails on the front face of the cab, below the windshields.

HANDRAIL SCUFF PLATES

A 4" wide mirrored stainless steel scuff plate shall be provided behind each handrail on the front of the cab.

INTERIOR CAB HANDRAILS

There shall be two (2) rubber coated grab handles provided and mounted on the interior of the cab, one each side, on the windshield post for ingress assistance. The handrail on the driver's side shall be approximately 11" long and the handrail on the officer's side shall be approximately 18" long.

INTERIOR CAB HANDRAILS

There shall be one (1) rubber coated grab handle provided and mounted on the interior of the rear crew cab area for ingress assistance. This handrail shall be installed at the entry point that does not have an exterior

handrail. The handrail shall be approximately 11" long.

CAB DOOR HANDRAILS

There shall be two (2) rubber coated grab handles provided and mounted, one on the inside of each rear crew door, just below the windowsill. The handrails shall be approximately 11" long.

There shall also be two (2) 1.25" diameter knurled stainless steel handrails shall be provided and mounted, one on the inside of each rear crew door, just above the windowsill. The handrails shall be approximately 22" long.

DRIVER'S SIDE CAB COMPARTMENT

There shall be a cabinet constructed of .125 aluminum plate recessed in the cab behind driver's side rear crew door. The compartment shall be approximately 60" high x 15" wide x 22.25" deep.

The compartment shall have a hinged door that is hinged at the front. The doors shall have an Austin Hardware slam catch single-point "D"-ring door closure and held open with gas struts.

The compartment shall be operated by an individual switch and illuminated with (1) LED light.

ACCESS TO CREW SEAT RISER

The exterior cab compartment on the driver's side shall be open to the crew cab seat compartment.

OFFICER'S SIDE CAB COMPARTMENT

There shall be a cabinet constructed of .125 aluminum plate recessed in the cab behind officer's side rear crew door. The compartment shall be approximately 38" high x 15" wide x 20.25" deep (12.75" deep if front suction)

The compartment shall have a hinged door that is hinged at the front. The doors shall have an Austin Hardware slam catch single-point "D"-ring door closure and held open with gas struts.

The compartment shall be operated by an individual switch and illuminated with (1) LED light.

ACCESS TO CREW SEAT RISER

The exterior cab compartment on the officer's side shall be open to the crew cab seat compartment.

ADJUSTABLE SHELF

There shall be two (2) adjustable shelves provided and installed in the compartment. The shelf shall be fabricated of .188 aluminum plate and have two 1.5" x 1.5" x .188" aluminum angles welded to the underside of the shelf for support.

HOOK STORAGE COMPARTMENT

Two (2) NY Hooks stored in the transverse storage area of the cab with a pocket that is accessible from the driver or officer side. Reference Layout designed for HS 6056-59 City of Columbus Fire.

PRO TEC

Install a piece of clear Protec on the vertical exterior face of the cab compartments where the pike poles enter the compt.

DIAMOND PLATE, CAB ROOF

The rear exterior section roof of the cab shall have a diamond plate overlay. The overlay shall be constructed of .125" aluminum embossed diamond plate and measure 30" x 91".

The interior back wall of the cab and the side walls near the forward-facing crew seats shall be covered with 3/16" smooth aluminum.

Undercoating shall be provided on the interior of the cab doors to aid in noise reduction and corrosion prevention.

BRUSH STAINLESS B PILLER SCUFF PLATES

- Install a brushed stainless steel scuff plate on both interior B-pillars.
- Plates to run from upper wedge-shaped wire chase to the floor level that is behind the front seats.

-Plates to protect paint from seat belts.
seat belts.

DOOR JAM SCUFFPLATES

Install a formed mirrored stainless edge protector on each of the (4) vertical cab door jams. Each protector to wrap around each side of the cab just enough to protect the edge of the cab. and cannot be visible when the doors are shut.

CAB INTERIOR

The metal surfaces of the cab interior shall be coated and sealed with MultiSpec black speckle, urethane modified, mar resistant paint. The textured coating shall provide paramount durability and wear resistance against foreign objects and normal wear and tear.

The front and rear headliners, as well as the rear cab wall, shall be finished in black Embossed FRP board.

INTERIOR DOOR PANELS

The interior of the cab entry doors shall have a 304 brushed stainless steel scuff plate, contoured to the door, from the door window sill down.

CAB FLOOR COVERING

The cab interior floor shall be covered with a 5/16" thick, black rubberized material to provide a rugged but cosmetically pleasing stepping surface throughout the cab. The floor covering shall provide superior durability and resistance against foreign objects as well as normal wear and tear.

DIAMOND PLATE, CAB FLOOR

The cab floor shall be covered with 1/8" embossed diamondplate.

ENGINE ENCLOSURE

An integral, formed aluminum and composite engine enclosure shall be provided. The engine enclosure shall be contoured and blended in an aesthetically pleasing manner with the interior dash and flooring of the cab. The enclosure shall be kept as low as possible, to maximize space and increase crew comfort.

The enclosure shall be constructed from 5052 H2 aluminum plate and GRP composite materials, providing high strength, low weight, and superior heat and sound deadening qualities.

Additionally, the underside of the engine enclosure shall be coated in with a ceramic spray on insulation and sound control. This coating is an environmentally-friendly coating that is applied seamlessly and rapidly while providing superior thermal insulation and protection against vibration and noise, and will prevent future corrosion from forming by sealing the substrate. NO EXCEPTIONS

ENGINE ENCLOSURE COVERING

The top of the engine enclosure shall be covered with Scorpion heavy duty, black polyurethane blended coating. The textured coating shall provide paramount durability and wear resistance against foreign objects and normal wear and tear as well as sound deadening and insulation. The rubberized cab floor covering shall extend up the lower exterior sides of the engine enclosure to aid in sound deadening and heat resistance.

TOOL MOUNTING PLATE

There shall be a 3/16" smooth aluminum plate installed on the engine enclosure between the driver and the officer for use in mounting of equipment. The mounting plate shall feature beveled edges on the front and sides for a finished appearance. The plate shall be coated with the same finish as the engine enclosure and shall be secured to the engine cover with screws for easy replacement.

ENGINE HOOD LIGHTS

An LED work light shall be installed in the engine enclosure with an individual switch located on the base of the light.

COMPUTER TRAY

There shall be a slide-out tray in front of the officer's seat for a laptop computer or other use.

CENTER CONSOLE

There will be a center console between the driver and officer.

- Reference HS-6355 Columbus, OH.
- See Reference Photo #11 on shared drive.

CHASSIS WIRING

All chassis wiring shall have XL high temperature crosslink insulation. All wiring shall be color-coded, and the function and number stamped at 3" intervals on each wire. All wiring shall be covered with high temperature rated split loom for easy access to wires when trouble shooting. All electrical connectors and main connectors throughout the chassis shall be treated to prevent corrosion.

MASTER ELECTRICAL PANEL

The main chassis breaker panel shall be wired through the master disconnect solenoid and controlled by the three-position ignition rocker switch. The breaker panel shall be located in front of the officer on the interior firewall and shall be protected by a removable aluminum cover. The cover shall have an aluminum notebook holder on the exterior face accessible to the officer. The cover shall be painted with a durable finish to match the interior of the cab and shall be secured with two (2) thumb screws.

The breaker panel shall include up to 22 ground switched relays with circuit breaker protection. An integrated electrical sub-panel shall be provided and interfaced to the body and chassis through an engineered wire harness system.

Twelve (12) 20-ampere relays and one (1) 70-ampere relay shall be provided for cab light bar and other electrical items. If the option for a mechanical siren has been selected two (2) additional relays shall be provided.

Up to two (2) additional relay boards with circuit breaker protection shall be provided for additional loads as required. Each board shall contain four (4) relays. The relay boards shall be configured to trip with input from switch of positive-negative or load manager by moving the connector on the board (no tools required).

All relay boards shall be equipped with a power-on indicator light (red), input indicator light (green) and power output indicator light (red).

Up to twenty-three (23) additional automatic reset circuit breakers for non-switched loads that are remotely switched (ie: heater fans, hood lights, etc.) shall be provided.

All relays and circuit breakers on the relay boards shall be pull-out/push-in replaceable.

All circuit breakers on the relay boards shall be 20 ampere automatic reset which can be doubled or tripled for 40 or 60-ampere capacity.

The system shall utilize Deutch DRC weather resistant connectors at the breaker panel, toe board and main dash connections.

All internal wire end terminals, including locking connectors, shall be mechanically affixed to the wire ends by matching terminal crimping presses to assure the highest quality terminations.

All internal splices shall be ultrasonically welded connections and all internal wiring shall be high temperature GXL type wire that is protected by wiring duct wherever possible.

All switches shall be ground controlled; no power going through any rocker switch.

Any switch controlling a relay in the breaker panel shall be capable of being set to function only when the parking brake is set. All relays shall be tagged with the function that the relay is controlling.

INSTRUMENT PANEL

The main dash shroud, which covers the area directly in front of the driver from the doorpost to the engine hood, shall be constructed of vacuum formed ABS material with scorpion texture. The dash shall be a one-piece hinged panel that tilts outward for easy access to service the internal components. The gauge panel shall be constructed with a .125" aluminum panel, covered with a scratch resistant reverse printed and laminated poly carbonite.

The gauges shall be AMETEK Vehicular Instrumentation Systems (VIS), Next Generation Instrumentation System (NGI) with built-in self-diagnostics and red warning lights to alert the driver of any problems. All gauges and controls shall be backlit for night vision and identified for function. All main gauges and warning lights shall be visible to the driver through the steering wheel.

MASTER BATTERY & IGNITION SWITCH

The vehicle shall be equipped with a keyless ignition, with a three (3)-position Master Battery rocker switch, "Off/ACC/On" and a two (2)-position Engine Start rocker switch, "Off/Start".

DIESEL PARTICULATE FILTER CONTROLS

There shall be two (2) controls for the diesel particulate filter. One control shall be for regeneration and one control shall be to inhibit engine regeneration. These shall be located below the steering wheel in the kick panel.

INSTRUMENTATION & CONTROLS

Instrumentation on dash panel in front of the driver:

Tachometer/hourmeter with high exhaust system regeneration temperature, and instrument malfunction indicators

Speedometer/odometer with built in turn signal, high beam, and re-settable trip odometer

Voltmeter

Diesel fuel gauge

DEF (Diesel Exhaust Fluid) gauge

Engine oil pressure

Transmission temperature

Engine temperature

Primary air pressure

Secondary air pressure

Indicators and warning lights in front of the driver:

Parking brake engaged

Low air with buzzer

Antilock brake warning

Check transmission

Transmission temperature

Upper power indicator

Seat belt

Engine temperature

Low oil indicator

Low voltage indicator

Air filter restriction light

Low coolant indicator

High idle indicator

Power on indicator

Check engine

Stop engine

Check engine MIL lamp

DPF indicator

High exhaust temperature

Wait to start

Other indicator and warning lights (if applicable):

- Differential locked
- PTO (s) engaged
- Auto-slip response
- Retarder engaged
- Retarder temperature
- ESC indicator

Controls located on main dash panel in front of the driver:

- Master power disconnect with ignition switch
- Engine start switch
- Headlight switch
- Windshield wiper/washer switch
- Differential lock switch (if applicable)
- Dimmer switch for backlighting

Controls included in steering column:

- Horn button
- Turn signal switch
- Hi-beam low-beam switch
- 4-way flasher switch
- Tilt-telescopic steering wheel controls

CENTER CONTROL CONSOLE

There shall be an ergonomically designed center control console. The console shall be constructed of 1/8" smooth aluminum and shall be mounted on the engine hood between the driver and officer. The console shall have a durable coating to match the color of the engine hood covering and shall feature surfaces on each side that are contoured to face the driver and the officer for easy viewing and accessibility. The switches and other customer specified electrical items shall be mounted in removable 1/8" smooth aluminum panels with a black wrinkle finish. The console shall have an aluminum lift-up lid with quick release latch. The lid shall be held in the open position with a gas strut to allow for easy access and serviceability.

Controls located in the console conveniently accessible to the driver:

- Transmission shifter
- Pump shift control with OK TO PUMP and PUMP ENGAGED lights
- Remote mirror control

Illuminated rocker switches to control high idle, Jacob's brake, siren/horn, siren brake, master emergency, and other customer specified components

12V power point (if applicable)

Controls located in the console conveniently accessible to the driver and the officer (center):

Parking brake control with a guard to prevent accidental engagement

Controls located in the console conveniently accessible to the officer:

Illuminated rocker switches to control customer specified components that are easily reachable to the officer and do not allow for compromise of the driver's view, and eliminate the need for foot switches

Surface to recess siren head, radio head, or other desired items as space permits

12V power point (if applicable)

Driving compartment warning labels shall include:

HEIGHT OF VEHICLE

OCCUPANTS MUST BE SEATED AND BELTED WHEN APPARATUS IS IN MOTION

DO NOT USE AUXILIARY BRAKING SYSTEMS ON WET OR SLIPPERY ROADS

EXIT WARNINGS

Additional labels included:

COMPUTER CODE SWITCH

ABS CODE SWITCH

FLUID DATA TAG

CHASSIS DATA TAG

OVERHEAD CONTROL CONSOLE

An ergonomically designed overhead console shall be provided above the driver and officer, running the full width of the cab. The overhead console shall be constructed from 1/8" aluminum plate and shall be painted with a durable finish to match the inside of the cab. There shall be seven (7) removable 1/8" smooth aluminum plates with a black wrinkle finish to house switches and other electrical items.

Directly above the driver there shall be two (2) panels with no cutouts, unless otherwise specified by the customer.

There shall be a panel located to the right of the driver that shall be designated for defroster, heat, and air conditioning controls (if specified).

The center overhead panel shall be designated for up to seven (7) door ajar indicators. Upon releasing the apparatus parking brake, one or more of these lights shall automatically illuminate (flash) when any of the following conditions occur that may cause damage if the apparatus is moved: cab or compartment door is

open; ladder or equipment rack is not stowed; stabilizer system deployed; any other device has not been properly stowed.

There shall be a panel to the left of the officer as well as two (2) directly above the officer. These panels shall have no cutouts, unless otherwise specified by the customer.

ENGINE WARNING SYSTEM

An engine warning system shall be provided to monitor engine conditions such as low oil pressure, high engine temperature and low coolant level. Warning indication shall include a STOP ENGINE (red) light with audible buzzer activation and a CHECK ENGINE (amber) light. Note: (Some engine configurations may also include a fluid warning light.)

There shall be a master information light bar with 24 lights located across the center of the dash panel that covers up to 24 functions. These are defined under Indicators and Warning Lights above.

CAB LOCKDOWN INDICATOR LIGHT

There shall be sensors in the cab lockdown latches. The sensors will send a signal to a marked light in the overhead light bar, inside the cab, to indicate when the cab is securely latched to the chassis, when the parking brake is released.

DOOR AJAR LIGHT

A Whelen LINZ6 LED light shall be installed in the cab near the driver. The light shall illuminate when the parking brake is released and any cab or body door is open or any other item on the apparatus is not properly stowed that may cause damage.

- Install (1) Whelen LINZ6 Red LED warning light w/Black bezel centered on the bottom of Overhead Console Position 4 panel. Match HS-6355-59.
- This light will flash when any of the cab or body doors are opened or when any of the body accessories are not stowed and the parking break is released (ladder rack, deck gun, hosebed doors).
- Specific items to indicate in the center overhead warning light cluster.
- DO NOT install an audible alarm for this light.

PROGRAMMABLE LOAD MANAGER

Load manager shall have the ability to sequence loads on and off. The Super Node II has twenty-four (24) inputs and twenty-four (24) outputs. Eighteen (18) are positive polarity outputs and six (6) are ground

polarity outputs. It shall also be able to establish a 8 priority levels to shedding loads when the vehicle is stationary, starting at 12.8 volts lowest priority load to be shed, then respectively at 12.7, 12.5, 12.3, 12.1, 11.9, 11.5 and never shed volts DC. An output is shed (turned OFF) when the system voltage drops below the designated priority level's shed voltage for thirty (30) seconds. If the voltage has dropped below multiple priority level shed voltages then each higher priority level will shed before the lower priority levels. An output is unshed (turned back ON) when the system voltage rises above the designated priority level's unshed voltage for ten (10) seconds. If the voltage has risen above multiple priority level unshed voltages then each lower priority level will unshed before the upper priority levels.

MASTER SWITCH

All outputs can be tied or not tied to the stage switch. In fire apparatus this switch is typically referred to as the master switch. The state of the stage switch is controlled by Utility Module output memory space 3. When this output is active the stage switch is active. Any output tied to the stage switch will be OFF if the stage switch is not active regardless of the output's multiplex equation. Set an output to be tied to the stage switch by checking the stage switch box in its "Output Port Load Settings" under the "Settings" tab. The name of the stage switch can be changed from the standard "stage" to anything desired by modifying the text in the "Output Port Load Settings" area.

AUTOMATIC HIGH IDLE ACTIVATION

The Utility Module's high idle request (input memory space 2) is activated when the system voltage drops below the high idle threshold (12.8 volts standard or 25.6 volts if 24 volt load management is enabled) for 8 seconds or longer AND load management has been enabled (Utility Module output memory space 1 is active). The high idle request will remain active as long as the voltage remains below the voltage threshold and for 3 minutes after the system voltage rises above the voltage threshold. High idle can be canceled by activating the Utility Module's high idle cancel (output memory space 0).

HIGH IDLE

The engine shall have a "high idle" switch on the dash that shall maintain an engine RPM of 1,000. The switch shall be installed at the cab instrument panel for activation/deactivation. The "high idle" mode shall become operational only when the parking brake is on and the truck transmission is in neutral.

AUXILIARY POWER POINT

One (1) 12-volt 20-ampere auxiliary lighter socket type plug-ins, shall be provided in the cab.

USB POWER POINTS

Four (4) 12-volt dual port USB power points shall be provided in the cab.

Two (2) Front dash location TBD

Two (2) Rear Cab location TBD

CAB ACCESSORY FUSE PANEL

A fuse panel shall be located underneath the rear facing seat on the officer's side. The fuse panel shall consist of six (6) battery hot and six (6) ignition switch circuits. Each circuit shall be capable of 10-ampere 12-volt power and total output of 50-amps. The fuse panel shall be capable of powering accessories such as hand held spotlights, radio chargers, hand lantern chargers and other miscellaneous 12-volt electrical components.

POWER & GROUND STUDS, OVERHEAD COMMAND CONSOLE

There shall be a set three of (3) threaded power studs provided in the cab's overhead Command Console for future installation of two-way radios.

The studs shall be wired as follows:

- One (1) 12-volt 60-amp, direct to the battery
- One (1) 12-volt 30-amp controlled by the ignition switch
- One (1) 12-volt 125-amp ground

POWER & GROUND STUDS, LOWER COMMAND CONSOLE

There shall be a set three of (3) threaded power studs provided in the cab's lower Command Console for future installation of two-way radios.

The studs shall be wired as follows:

- One (1) 12-volt 60-amp, direct to the battery
- One (1) 12-volt 30-amp controlled by the ignition switch
- One (1) 12-volt 125-amp ground

VEHICLE DATA RECORDER

An Akron / Weldon vehicle data recorder as required by the 2009 edition of NFPA 1901 shall be installed. Vehicle data shall be sampled at the rate of 1 second per 48 hours, and 1 minute per 100 engine hours.

Free software is available to allow the fire department to collect the data as needed.

SPRING LOADED PAPER CLIP

There will be a spring loaded paper clip supplied and installed on the officer side panel.

MOMENTARY BACK UP ALARM DISABLE

There will be a momentary switch accessible to the driver to disable the back up alarm.

LIGHTING CAB INTERIOR

Interior lighting shall be provided inside the front of the cab for passenger safety. Two (2) Whelen 6" round ceiling mounted combination red/clear LED dome lights with a push button on/off switch in the light lens. One light shall be located over each the officer and driver's position. The lights shall also activate from the open door switch located in each cab doorjamb.

LIGHTING CREW CAB INTERIOR

Interior lighting shall be provided inside the crew cab for passenger safety. Three (3) Whelen 6" round ceiling mounted combination red/clear LED dome lights with a push button on/off switch in the light lens shall be provided. The lights shall also activate from the open door switch located in each cab doorjamb.

HEAVY DUTY HEATER/DEFROSTER/AIR CONDITIONER

There shall be a minimum 80,000 cool BTU and 65,000 heat BTU single unit, heater/air conditioner mounted over the engine cover. The unit shall be mounted in center of the cab on the engine hood/enclosure. Unit shall have a shutoff valve at the right side of the frame, next to the engine. Airflow of the heater/air conditioner shall be a minimum 1200 CFM. To achieve maximum cooling, a TM-31 Compressor (19.1 cu. in.) will be used.

The defroster/heater shall be a minimum of 35,000 BTU and shall be a separate unit mounted over the windshield. There shall be eight (8) louvers/diffusers to direct to windshield and door glass. Airflow of the defroster/heater shall be a minimum 350 CFM. The unit shall be painted Zolatone greystone to match the cab ceiling.

The condenser shall be roof mounted and have 80,000 BTU rating. The unit shall include two fan motors. Airflow of the condenser shall be a minimum 2250 CFM. (This roof-mounted condenser shall work at full rated capacity at an idle with no engine heat problems.)

HEATER/DEFROSTER/AIR CONDITIONING CONTROLS

The heater/defroster/air conditioning shall be located in the overhead console in the center of the apparatus cab within reach of the driver and officer. The controls shall be illuminated for easy locating in dark conditions. The controls shall be located in such a way that the driver will not be forced to turn away from the road to make climate control adjustments. Control of all heater/defroster/air conditioning functions for the entire apparatus cab shall be achieved through these controls.

FLOORBOARD HEATING DUCT

There shall be ductwork to the floor of the cab, facing forward to provide heat for the front of cab floor area.

DEFROSTER DIFFUSER

A molded diffuser made of durable ABS plastic ductwork system shall be provided. It shall be form fitted and shall attach to the cab's overhead defroster unit to provide temperature controlled air to the windshields. Air flow of up to 280 cfm is balanced and directed across the entire windshield for optimum defrosting capability in all types of weather.

TOOL MOUNTING PLATE

There shall be a 3/16" smooth aluminum plate installed on top of the heat/ air conditioning unit for use in mounting of equipment. The plate shall measure approximately 25" wide x 19.5" long and shall be spaced up 1". The mounting plate shall feature beveled edges on the front and rear for a finished appearance. The plate shall be coated with the same finish as the heat/air conditioning unit and shall be secured with screws for easy replacement.

STORAGE COMPARTMENT

A storage unit constructed of .125" aluminum material shall be installed on the back of the heat/air conditioning, and shall have 2 small slots towards the outter ends, 2 medium slots located next to those, and 1 small slot located in the center for miscellaneous storage. The corners of the storage compartment shall be slanted towards the front of the A/C unit.

METAL VENT COVERS

Metal deflectors shall be provided for the hood mounted heat/A/C unit.

AUXILIARY DEFROSTER FAN

There shall be a Red Dot model RD-5-5786-OP 12-volt fan mounted under the upper command console, outboard of console position 1, directed at the driver's side windshield. The fan shall be activated by a 3-position toggle switch located at the base of the fan. The switch positions shall be High, Low and Off.

AUXILIARY DEFROSTER FAN

There shall be a Red Dot model RD-5-5786-OP 12-volt fan mounted under the upper command console, outboard of console position 7, directed at the officer's side windshield. The fan shall be activated by a 3-position toggle switch located at the base of the fan. The switch positions shall be High, Low and Off.

AUXILIARY DEFROSTER FANS

There shall be two (2) Red Dot model RD-5-5786-OP 12-volt fan mounted in crew area. The fan shall be activated by a 3-position toggle switch located at the base of the fan. The switch positions shall be High, Low and Off.

DRIVER'S SEAT

A H.O. Bostrom Sierra ABTS seat with air suspension shall be provided for the Driver. The seat back shall be fixed back and the seat cushion shall have a tapered, ergonomically contoured, extended seat cushion with bolster support and shall include occupancy sensor. The seat shall be equipped with a red 3-point shoulder harness with lap belt and dual retractors built into the seat assembly with RiteHite™ Seat belt customized fit Adjustment. The seat shall have fore/aft adjustment and shall be upholstered with heavy duty Low Seam Durawear Plus material.

HELMET STORAGE

The helmet for the above seat shall be stored in a compartment. A placard shall be provided visible to the riding position warning that injury may occur if helmets are worn while seated.

OFFICER'S SEAT

A H.O. Bostrom Tanker 550 ABTS SCBA fixed base seat shall be installed behind the Officer. The seat back shall have a SCBA cavity and auto-pivot-and-return padded headrest. The seat shall be equipped with a red 3-point shoulder harness with a lap belt and dual retractors built into the seat assembly with RiteHite™ Seat belt customized fit Adjustment. The seat shall be upholstered with heavy duty Low Seam Durawear Plus material.

UNDER SEAT STORAGE COMPARTMENT

There shall be a storage area under the officer's seat, accessible from the front through a hinged door with Southco C5 compression lever latch. The door shall be painted with a durable finish to match the inside of the cab and shall be vertically hinged near the engine enclosure.

The storage area shall be approximately 19.5" wide x 14.375" high x 21.75" deep. The lower rear portion of the compartment shall be tapered to accommodate the wheel well and wiring chase. The opening shall be approximately 15.5" wide x 10.5" high.

HELMET STORAGE

The helmet for the above seat shall be stored in a compartment. A placard shall be provided visible to the riding position warning that injury may occur if helmets are worn while seated.

CREW SEAT – DRIVER'S SIDE, REAR FACING

A H.O. Bostrom Tanker 550 ABTS SCBA fixed base seat shall be installed behind the Driver. The seat back shall have a SCBA cavity and auto-pivot-and-return padded headrest. The seat shall be equipped with a red 3-point shoulder harness with a lap belt and dual retractors built into the seat assembly with RiteHite™ Seat belt customized fit Adjustment. The seat shall be upholstered with heavy duty Low Seam Durawear Plus material.

HELMET STORAGE

The helmet for the above seat shall be stored in a compartment. A placard shall be provided visible to the riding position warning that injury may occur if helmets are worn while seated.

CREW SEAT – OFFICER’S SIDE, REAR FACING

A H.O. Bostrom Tanker 550 ABTS SCBA fixed base seat shall be installed behind the Officer. The seat back shall have a SCBA cavity and auto-pivot-and-return padded headrest. The seat shall be equipped with a red 3-point shoulder harness with a lap belt and dual retractors built into the seat assembly with RiteHite™ Seat belt customized fit Adjustment. The seat shall be upholstered with heavy duty Low Seam Durawear Plus material.

HELMET STORAGE

The helmet for the above seat shall be stored in a compartment. A placard shall be provided visible to the riding position warning that injury may occur if helmets are worn while seated.

CREW SEAT - OFFICER'S SIDE, FORWARD FACING, OUTBOARD

A H.O. Bostrom Tanker 550 ABTS SCBA fixed base seat shall be installed in the Office's side forward-facing outboard position. The seat back shall have a SCBA cavity and auto-pivot-and-return padded headrest. The seat shall be equipped with a red 3-point shoulder harness with a lap belt and dual retractors built into the seat assembly with RiteHite™ Seat belt customized fit Adjustment. The seat shall be upholstered with heavy duty Durawear material, and stiched with a low seam all the way around the base cushion.

HELMET STORAGE

The helmet for the above seat shall be stored in a compartment. A placard shall be provided visible to the riding position warning that injury may occur if helmets are worn while seated.

SEAT UPHOLSTERY COLOR

The cab seat upholstery shall be black in color.

BOTTOM CUSHION SEAT COVERS

A removable Bostrom Zip Clean washable cover shall be provided on each bottom seat cushion. An additional cover shall be also provided for each seat for use when the initial seat cover has been removed for cleaning.

BACK SEAT COVERS

A removable Bostrom Zip Clean washable cover shall be provided on the back rest of each seat.

SCBA BRACKETS

Each SCBA seat in the cab shall feature an IMMI SmartDock hands-free self contained breathing apparatus (SCBA) storage bracket within the seat back.

The bracket shall consist of a main vertical support bracket, lower guide plate with valve retaining tabs, top claw assembly with wings, and an integral height adjustment knob. The top claw shall be adjustable for different diameters of SCBA cylinders. The head height shall be adjustable with the integrated adjustment knob for different heights of SCBA cylinders.

The bracket shall feature single-motion SCBA insertion and hands-free release when the fire fighter stands up to exit the seat. In the event of a collision, the top claws lock from inertial forces for a secure hold.

SEAT BELT WARNING SYSTEM

An Akron / Weldon seat belt warning system shall be provided, and shall monitor each seating position. Each seat shall be supplied with a sensor that, in conjunction with the display module located on the dash, shall determine when the seat belt was fastened and if the seat is occupied. An icon shall represent that the seat is properly occupied. An audible and visual alarm shall be activated if the seat is occupied and/or the belt is not fastened in the proper sequence.

CREW SEAT COMPARTMENT

A compartment shall be provided under the forward facing crew seats on the back wall of the cab. Two drop down doors shall be provided on the front face of the compartment. Compartment dimensions are 91.5"L x 14"H x 19"W.

IN-CAB OVERHEAD STORAGE AREA

An overhead storage area shall be provided at the front of the raised roof portion inside of the cab above the rear-facing crew seats. The full-width storage area shall be approximately 84" wide x 20.5" high x 17" deep and shall have a Zolatone gray/black rubberized, textured finish to match the cab interior. The storage area shall be equipped with aluminum lift-up doors.

IN-CAB OVERHEAD STORAGE AREA

An overhead storage area shall be provided at the rear of the raised roof portion inside of the cab above the forward-facing crew seats. The full-width storage area shall be approximately 84" wide x 20.5" high x 15" deep and shall have a Zolatone gray/black rubberized, textured finish to match the cab interior. The storage area shall be equipped with aluminum lift-up doors.

HD STEREO

A Jensen HD AM/FM/WB Bluetooth stereo shall be provided with four speakers.

LED ICC/MARKER LIGHTS

LED type ICC/marker lights shall be provided to meet D.O.T. requirements. The DOT lights for the brow are integrated in the brow light.

GROUND LIGHTING

The apparatus shall be equipped with lighting capable of illumination to meet NFPA requirements. Lighting shall be provided at areas under the driver and crew riding area exits and shall be automatically activated

when the exit doors are opened. The ground lights shall be Truck-lite® LED model #44042C. Lighting required in other areas such as work areas, steps and walkways shall be activated when the parking brake is applied, provided the ICC lights are on.

OPTICAL WARNING SYSTEM

The optical warning system shall be capable of two separate signaling modes during emergency operations. One mode shall signal to drivers and pedestrians that the apparatus is responding to an emergency and is calling for the right-of-way and the other mode shall signal that the apparatus is stopped and is blocking the right-of-way.

A momentary rocker switch shall be provided near the driver and labeled Master Emergency to energize all of the optical warning devices provided. A secondary momentary rocker switch shall be provided near the officer. All lights shall operate at not less than the minimum flash rate per minute as specified by NFPA.

UPPER LEVEL WARNING DEVICES

The upper level shall be divided into zones A (front), B (officer's side), C (rear) and D (driver's side).

Zone A shall be provided by the chassis manufacturer as follows:

Zone A (front) shall have three (3) Whelen Freedom IV 21" LED light bars. The center light bar shall have two (2) red corner LED modules, one (1) forward-facing red LED module, and one (1) white forward-facing LED module. Each outer light bar shall have one (1) end red LED module, two (2) corner red LED modules, one (1) forward-facing red LED module and one (1) forward-facing white LED module. The light bars shall have all clear outer lenses. The light bars shall be installed on the cab roof as far forward as possible each with two (2) MK8H 5" cast aluminum risers. The two (2) outer light bars shall be installed at a 45-degree angle to the center light bar.

LOWER LEVEL WARNING DEVICES

The lower level shall be divided into zones A (front), B (officer's side), C (rear) and D (driver's side).

Zone A shall be provided by the chassis manufacturer as follows:

Zone A (front) shall have four (4) Whelen M6 series model M6* Super LED warning lights.

The lights shall be installed two (2) each side on the front of the cab in the warning light housings.

ADDITIONAL WARNING LIGHTS

There shall be (2) additional Whelen M6 Series model M6* Super LED warning lights installed on the apparatus. Located above the front axle on the driver and officer side.

ADDITIONAL WARNING LIGHTS

Two (2) additional Whelen M9V2* LED series warning lights shall be installed on the apparatus.

SURFACE MOUNTED LED SCENE LIGHT

One (2) Fire Research Spectra SPA260-Q20 surface mounted LED scene light shall be provided. The lamp head shall operate at 12 volts DC, draw 14 amps, and generate 20,000 lumens of light. The lights shall be mounted on each side of the cab raised roof portion above the crew fixed window, shall be controlled from a switch in the cab.

BROW MOUNTED LED SCENE LIGHT

One (1) FireTech 72" 3-piece FT-B-72-ML-3PKIT-* brow mounted LED scene lights shall be provided. The lamp head shall operate at 12 volts DC, draw 23.8 amps, and generate over 30,000 lumens of light. The light shall be mounted at the front brow of the cab and shall be controlled from a switch in the cab. All custom mounting brackets shall be supplied by OEM. The DOT lights are integrated in the brow light.

ADDITIONAL 3-WAY SWITCH

Four (4) additional 3-way switches shall be provided per the
Panel #5
Brow Light
Left Scene Cab & Body
Right Scene Cab & Body
Rear Scene

CORROSION REDUCTION POLICY

It is understood that fire apparatus will operate in harsh environments. The Sutphen Corporation has in place a formal corrosion reduction program and detailed assembly procedures, designed for reducing and

eliminating the possibility of corrosion. A formal program following the processes as set forth in ASTM B117, and is described below.

Frame Rails

The chassis frame rails shall be coated with a high performance, two component, reinforced inorganic zinc rich primer with a proven cathodic protection makeup preferably Cathacoat 302HB. The surface shall be clean and free of all salts, chalk and oils prior to application. Where the primer has been broken during the frame assembly process the area shall be touched up to reestablish the seal. Prior to finish paint a second primer Devran 201 shall be applied. Once the assembly of the frame is complete and the second primer is applied the entire assembly shall be covered with high quality top coat paint preferably Imron 5000 or equal.

Electro Plating

Steel and Iron brackets such as the pump module bracket shall be Zinc or cadmium plated to protect against corrosion. Plating shall be in accordance with ASTM B663.

Fasteners

In any area that a stainless steel screw or bolt head is to come in contact with aluminum or steel, painted or non-painted, the fastener shall have the underside of the head pre-coated with nylon. The nylon coating shall act as a barrier between the fastener head and the metal or painted surface.

Screw or bolt taped into the metal shall be pre-coated with a Threadlocker type material pre-applied on the threads.

When bolting together stainless steel the pan-head bolts with nylon coating under the head, a stainless washer with a rubber backing, and a Stover flange nut to secure the bolt, shall be utilized.

When mounting aluminum components such as a step to the apparatus body, stainless steel washers with rubber backing shall be used. All mounted components shall utilize barrier material between the two surfaces.

All rivet or huck type fasteners shall be of the same material being secured.

Whenever possible, holes shall be pre-drilled and taped when mounting components such as lights, steps, and hand rails prior to the paint process to reduce the corrosion opportunity. If a hole must be drilled into a previously painted surface, the paint barrier around the hole shall be re-established and a flange-type nutsert with a gasket under the flange shall be used.

When possible, the use of stainless trim screws shall be minimized. Structural tape and or adhesive shall be used where possible for mounting trim to the body or cab.

If a pre-treated screw or bolt is not available, hand applied Dynatex Boltlocker or Theadlocker shall be placed on the threads of the screw, bolt or nutsert. This will help seal threads from moisture and help prevent the fasteners from loosening. If lubricant is used when tapping the hole, the hole will be cleaned of lubricant and the shavings before applying.

Barrier Tape

Barrier tape shall be used on the backsides of all lights, trim pieces, or other components when bolting them to the apparatus; also when attaching stainless steel over an aluminum surface or when attaching aluminum treadplate to the stainless steel. All instances of dis-similar metals contacting each other require the addition of barrier tape between the metals where contact is made.

Before applying the tape, all metal surfaces shall be clean from oil or dirt with a 50/50 mix of alcohol and water or a similar solvent.

Gaskets

Gaskets shall be used under all snaps, loops and fasteners for such items as for hose bed covers. The paint seal shall be re-established around the mounting hole edges after drilling.

Rollup Doors

1 3/4" X 1/16" barrier tape shall be used on the frame opening to act as barrier between the aluminum door rail and the painted door opening surface.

Hinged Doors

Barrier tape shall be applied to the painted surface of the body and on the painted hinge side of the door.

Painting Steel

Steel shall be wiped of any oil residue, rust, and weld slag or smoke shall be removed. All surfaces shall be cleaned with solvent, primed, and then sprayed with a topcoat. After bolts are tightened to the proper torque, bolts shall be touched up with primer or cold galvanizing coating.

Mounting Emergency Lights and Options

All emergency lights, accessory mountings, Kussmaul covers, and 110 outlet boxes mounted to the body should be mounted with pre-coated Threadlocker and nylon under the head screws or bolts to minimize corrosion between dissimilar metals.

Electrical Grounding

Grounding straps shall be installed consisting of a minimum 2-gauge strap bolted to the chassis frame.

A ground cable from the cab to the right side frame rail

From the alternator to the right side frame rail

From the pump module frame to the right side truck frame.

Aerials: from the hydraulic and pump module framework.

From the pump mount to the truck frame rail.
From the body module to the right side truck frame.

Proper grounding will help eliminate grounding problems, and will reduce the possibility for electrolysis and corrosion to occur, as a result of impressed current be presented to the chassis. All electrical connection points shall be sprayed with electrical sealer as necessary.

SALT SPRAY TESTING

All fasteners and coatings have been chosen after extensive salt spray testing. Salt spray tests are used to confirm the relative resistance to corrosion of coated and uncoated metallic specimens, when exposed to a salt spray climate at an elevated temperature. Test specimens are placed in an enclosed chamber and exposed to a continuous indirect spray of neutral (pH 6.5 to 7.2) salt water solution, which falls-out on to the specimens at a rate of 1.0 to 2.0 ml/80cm²/hour, in a chamber temperature of +35C., steady state condition.

Method

Salt fog testing is performed by placing samples in a test cabinet that has been designed in accordance with Paragraph 4 (Apparatus) of ASTM B117 and operated in accordance with Paragraph 10 (Conditions) of ASTM B117.

A 5% salt solution, prepared by dissolving sodium chloride into water that meets the requirements of ASTM D1193 Specification for Reagent Water, Type IV is supplied to the chamber. At the time the samples are placed into test, the cabinet is pre-conditioned to the operating temperature of 35°C and fogging a 5% salt solution at the specified rate.

Orientation

The samples are placed at a 15-30 degree angle from vertical or tested in the “installed” position. This orientation allows the condensation to run down the specimens and minimizes condensation pooling. An important aspect of the test is the utilization of a free-falling mist, which uniformly settles on the test samples. This simulates a “real world” condition.

Test durations

Test durations are 500 hours, and the test cabinet will remain closed for the duration of the test.

PAINTING

All exposed metal surfaces not chrome plated, polished stainless steel or bright aluminum tread plate shall be thoroughly cleaned and prepared for painting. All irregularities in painted surfaces shall be rubbed down and all seams shall be caulked before the application of the finish coat.

All removable items such as brackets, door hinges, trim, etc. shall be removed and painted separately to insure finish paint behind all mounted items. Both aluminum and steel surfaces to be painted shall be

primed with a two (2)-component primer which is compatible with the finish coat. The apparatus shall be finish painted with a polyurethane base/clear system. "No Exception"

A barrier gasket/washer of "High Density Closed Cell Urethane Foam" shall be used behind all lights, handrails, door hardware and any miscellaneous items such as stainless steel snaps, hooks, washers and acorn nuts. The gaskets/washers shall be coated with pressure sensitive acrylic adhesive. All screws used to penetrate painted surfaces shall be pre-treated/coated under the head with nylon and the threads shall have pre-coat #80. This procedure shall be strictly adhered to for corrosion prevention and damage to the finish painted surfaces.

The following paint process shall be utilized:

Surface Preparation:

1. Wash surface thoroughly with mild detergent.
2. Clean and de-grease with Prep-Sol 3812S.
3. Sand and feather edge using 400 grit or finer on a dual action sander.
4. Remove sanding dust with a cleaner compatible with polyurethane base coat/clear coat final finish.

Substrate treatment:

1. Use a Metal Conditioner followed with a Conversion Coating product.

Priming:

1. Use a priming 615S pretreatment.
2. Use a self etching primer applied to achieve a 1.5 mil dft minimum.
3. Use Prime N Seal sealer compatible with polyurethane base coat.

Color Coat:

1. Apply polyurethane base coat 1-2 mil dft minimum.

Clear coat:

1. Apply polyurethane clear coat 2 mil dft minimum.

SINGLE TONE PAINT

A single paint color shall be provided for the apparatus.

PAINTED FRAME

The frame rails and body rear drop shall be painted glossy black.

AIR CONDITIONING CONDENSER

The air conditioning condenser shall be painted to match the cab roof.

MISCELLANEOUS EQUIPMENT FURNISHED

1 pt. touch-up paint

A bag of stainless steel nuts and bolts, as used in the construction of the apparatus.

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

The vehicles low voltage electrical system shall be tested and certified by the manufacturer. The certified test results shall be delivered with the completed vehicle. Tests shall be performed when the air temperature is between 0°F and 110°F (−18°C and 43°C).

TEST SEQUENCE

The following three (3) tests shall be performed in the order in which they appear below. Before each test, the batteries shall be fully charged until the voltage stabilizes at the voltage regulator set point and the lowest charge current is maintained for ten (10) minutes. Failure of any of these tests shall require a repeat of the sequence.

1. RESERVE CAPACITY TEST

The engine shall be started and kept running until the engine and engine compartment temperatures are stabilized at normal operating temperatures and the battery system is fully charged. The engine shall be shut off and the minimum continuous electrical load shall be activated for ten (10) minutes.

All electrical loads shall be turned off prior to attempting to restart the engine. The battery system shall then be capable of restarting the engine. Failure to restart the engine shall be considered a test failure of the battery system.

2. ALTERNATOR PERFORMANCE TEST

TEST AT IDLE

The minimum continuous electrical load shall be activated with the engine running at idle speed. The engine temperature shall be stabilized at normal operating temperature. The battery system shall be tested to detect the presence of battery discharge current. The detection of battery discharge current shall be considered a test failure.

TEST AT FULL LOAD

The total continuous electrical load shall be activated with the engine running up to the engine manufacturer's governed speed. The test duration shall be a minimum of two (2) hours. Activation of the load management system shall be permitted during this test.

An alarm sounded by excessive battery discharge, as detected by the warning system required in 13.3.4, or a system voltage of less than 11.8 V dc for a 12 V nominal system, 23.6 V dc for a 24 V nominal system, or 35.4 V dc for a 42 V nominal system for more than 120 seconds shall be considered a test failure.

3. LOW VOLTAGE ALARM TEST

The following test shall be started with the engine off and the battery voltage at or above 12 V for a 12 V nominal system, 24 V for a 24 V nominal system or 36 V for a 42 V nominal system.

With the engine shut off, the total continuous electrical load shall be activated and shall continue to be applied until the excessive battery discharge alarm activates. The battery voltage shall be measured at the battery terminals.

The test shall be considered a failure if the alarm does not sound in less than 140 seconds after the voltage drops to 11.70 V for a 12 V nominal system, 23.4 V dc for a 24 V nominal system, or 35.1 V for a 42 V nominal system.

The battery system shall then be able to restart the engine. Failure to restart the engine shall be considered a test failure.

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

DOCUMENTATION

The manufacturer shall deliver the following with the fire apparatus:

- 1) Documentation of the electrical system performance tests
- 2) A written electrical load analysis, including the following:
 - a) The nameplate rating of the alternator
 - b) The alternator rating
 - c) Each of the component loads specified that make up the minimum continuous electrical load
 - d) Additional electrical loads that, when added to the minimum continuous electrical load, determine the total continuous electrical load
 - e) Each individual intermittent electrical load

UL 120/240 VAC CERTIFICATION

The 120/240 volt electrical system shall be third-party, independent, audit-certified through Underwriters Laboratory (UL) to the current edition of NFPA 1901 to perform as listed below;

The prime mover shall be started from a cold start condition, and the unloaded voltage and frequency shall be recorded.

The line voltage electrical system shall be loaded to at least 100% of the continuous rated wattage stated on the power source specification label. Testing with a resistive load bank shall be permitted.

The power source shall be operated in the manner specified by the apparatus manufacturer as documented on instruction plates or in operation manuals. The power source shall be operated at a minimum of 100% of the continuous rated wattage as stated on the power source specification label for a minimum of two (2) hours.

The load shall be adjusted to maintain the output wattage at or above the continuous rated wattage during the entire 2-hour test.

The following conditions shall be recorded at least every 1/2 hour during the test:

- 1) The power source output voltage, frequency and amperes
- 2) The prime mover's oil pressure, water temperature and transmission temperature, if applicable
- 3) The power source hydraulic fluid temperature, if applicable
- 4) The ambient temperature and power source air inlet temperature

The following conditions shall be recorded once during the test for power sources driven by dedicated auxiliary internal combustion engines:

- 1) Altitude

- 2) Barometric pressure
- 3) Relative humidity

If the generator is driven by the chassis engine and the generator allows for operation at variable speeds, the chassis engine speed shall be reduced to the lowest rpm allowed for generator operation and the voltage and frequency shall be recorded.

The load shall be removed and the unloaded voltage and frequency shall be recorded.

Voltage shall be maintained within $\pm 10\%$ of the voltage stated on the power source specification label during the entire test. Frequency shall be maintained within ± 3 Hz of the frequency stated on the power source specification label during the entire test.

The total continuous electrical loads, excluding those loads associated with the equipment defined in NFPA 22.15.7.3.11.2, shall be applied during the testing unless an auxiliary engine drives the power source.

If the apparatus is equipped with a fire pump, the 2-hour certification test of the power source shall be completed with the fire pump pumping at 100% capacity at 150 psi (1000 kPa) net pump pressure. The test shall be permitted to be run concurrently with the pump certification test.

DOCUMENTATION

The results of each test shall be recorded on an appropriate form and provided with the delivery of the fire apparatus.

DIELECTRIC VOLTAGE WITHSTAND TEST

The line voltage wiring and permanently connected devices and equipment shall be subjected to a dielectric voltage withstand test of 900 volts for one (1) minute. The testing shall be performed after all body work has been completed.

The test shall be conducted as follows:

- 1) Isolate the power source from the panel board and disconnect any solid state low voltage components
- 2) Connect one lead of the dielectric tester to all the hot and neutral buses tied together
- 3) Connect the other lead to the fire apparatus frame or body
- 4) Close any switches and circuit breakers in the circuit(s)
- 5) Apply the dielectric voltage for one (1) minute in accordance with the testing equipment manufacturer's instructions

The electrical polarity of all permanently wired equipment, cord reels and receptacles shall be tested to verify that wiring connections have been properly made.

Electrical continuity shall be verified from the chassis or body to all line voltage electrical enclosures, light housings, motor housings, light poles, switch boxes and receptacle ground connections that are accessible to fire fighters in normal operations.

If the apparatus is equipped with a transfer switch, it shall be tested to verify operation and that all non grounded conductors are switched.

Electrical light towers, floodlights, motors, fixed appliances and portable generators shall be operated at their full rating or capacity for 30 minutes to ensure proper operation.

-

EXHAUST SYSTEM (VERTICAL)

The existing exhaust tailpipe shall be modified to a vertical exhaust pipe. The tailpipe shall extend above the body height a minimum of 12". Where the pipe extends through the vertical chimney of body the exhaust piping shall be wrapped with high temperature Fiberglas material to reduce body components exposed to high temperatures.

The exhaust piping and discharge outlet shall be located or shielded so as not to expose any portion of the apparatus or equipment to excessive heating.

Exhaust pipe discharge shall be directed away from any operator's position.

Where parts of the exhaust system are exposed so that they are likely to cause injury to operating personnel, protective guards shall be provided.

MUDFLAPS

There shall be a full width brush style mudflap provided and installed behind rear set of tires to prevent throwing road debris and lower road spray.

FUEL FILL

There shall be one (1) fuel fill door located in the streetside exterior wheel well panel, behind the rear axle. The fill door shall be fabricated from brushed stainless steel. There shall be a permanent label with the text "DIESEL FUEL ONLY" located adjacent to the fuel fill access.

BODY DESIGN

The importance of public safety associated with emergency vehicles requires that the construction of this vehicle meet the following specifications. These specifications are written to establish the minimum level of quality and design.

It is the intent of these specifications to fully describe the requirements for a custom built emergency type vehicle. In order to extend the expected service life of this vehicle, the body module shall be removable from the chassis frame and be capable of being installed on a new chassis.

The sheet metal material requirements, including alloy and material thickness, throughout the specifications are considered to be a minimum. Since such materials are available to all Manufacturers, the material specifications shall be strictly adhered to.

The fabrication of the body shall be formed sheet metal. Formed components shall allow the City of Columbus to have the body repaired locally in the case where any object has struck the body and caused damage. The use of proprietary extrusions will prevent the City of Columbus from such repair and shall NOT be used. All fabricated body components to be cut by a laser or water-jet for superior cut edge quality.

Following construction of the subframe, which supports the apparatus body, the sheet metal portion of the body shall be built directly on the subframe. The joining of the subframe and body shall be of a welded integral construction.

The sheet metal fabrication of the body shall be performed using inert gas continuous feed welders only. The entire body shall be welded construction. The use of pop rivets in any portion of structural construction may allow premature failure of the body structure. Therefore, pop rivets shall NOT be used in the construction of the structural portions of the body. This includes side body sheets, inner panels of compartment doors, and any other structural portions of the body.

EXTERIOR ALUMINUM BODY

The fabrication of the body shall be constructed from aluminum 3003H-14 alloy smooth plate. This shall include compartment front panel, vertical side sheets, side upper rollover panels, rear panels and compartment door frames.

The body compartment floors and exterior panels shall be constructed with not less than 3/16" (.187) aluminum 3003H-14 smooth plate. Interior compartment dividing walls shall be constructed with not less than 1/8" (.125) aluminum 3003H-14 smooth plate. Lighter gauge sheet metal will not be acceptable in these areas, No Exceptions.

The front and rear corners of body shall be formed as part of the front or rear body panels. This provides a stronger body corner and finished appearance. The use of extruded corners, or caps will not be acceptable, No Exceptions.

The door side frame openings shall be formed "C" channel design. An electrical wiring conduit raceway running the full length of exterior compartments shall be provided. This raceway shall contain all 12 volt wiring running to the rear of the apparatus, permitting easy accessibility to wiring.

Individual compartment modules, with dead air space voids between compartments, will not be an acceptable method of compartment construction.

The compartments shall be an integral part of the body construction. Compartment floors from front of body to ahead of rear axle, also from rear axle to rear of body shall be single one-piece sections. Compartment floors shall be preformed, then positioned in body and welded into final position.

Compartment floors shall have a "sweep-out" design with door opening threshold positioned lower than compartment floor, permitting easy cleaning of compartments. Angles, lips, or door moldings are not acceptable in the base of compartment door opening. One-way rubber drain valves shall be provided in compartment floors so that a water hose may be used to flush-out compartment area.

All exterior seams in sheet metal below frame, and around the rear wheel well area shall be welded and caulked to prevent moisture from entering the compartments. All other interior seams and corners shall be sealed with silicone based caulk prior to painting.

Only stainless steel bolts, nuts, and sheet metal screws shall be used in mounting exterior trim, hardware and equipment.

DRIP RAILS

The body shall have drip rails over the side full height compartments. The drip rails shall be formed into the upper body panels providing a ridged lower panel and a flat upper body panel surface. The use of mechanically fastened, taped or glued on drip rails will not be acceptable, No Exceptions.

WALKWAY/ROOF COMPARTMENT SUPPORT

The upper body floor structure shall be integral with the body sheet metal construction and shall be an all welded assembly. Bolted or glued assemblies shall not be accepted, .

All seams in roof material shall be fully and continuously welded to prevent entry of moisture.

There shall be a total of four (4) 2" x 2" x 1/4" 6061-T6 alloy aluminum "C" channels running the length of body, two (2) on each outboard side. These "C" channels shall be used for roof support and in addition shall be used for mounting of any specified reels. This open "C" channel design along with special reel mounting clips allows for a universal location of any specified reels within each compartment.

In between the two (2) center "C" channels running the length of body shall be 2" x 2" x 1/4" 6061-T6 alloy aluminum tubing running perpendicular to walkway and welded in place on approximate 16" centers to support roof and/or walkway structure specified. Spacing greater than 16" that can allow oil canning of walkway shall not be allowed, .

A 2" formed radius shall be provided along the body sides and utilized as a wiring trough. The use of aluminum extrusions in this area shall not be acceptable, .

BODY SUBFRAME

The chassis frame rails shall be fitted with 1/4" custom extruded UHMW polyethylene rail cap to isolate the body frame members from direct contact with chassis frame rails.

The body subframe shall be constructed from 6061T6 aluminum alloy tubing. Subframe shall consist of two (2) 2" x 6" x 1/4" aluminum tubes, the same width as the chassis frame rails, NO EXCEPTION. Welded to this tubing shall be cross members of 2" x 6" x 1/4" aluminum. These cross members shall extend the full width of the body to support the compartments. Cross members shall be located at front and rear of the body, below compartment divider walls, and in front and rear of wheel well opening. Additional aluminum cross members shall be located on 16" centers, or as necessary to support walkway or heavy equipment.

To form the frame, the tubing shall be beveled and welded at each joint using 5356 aluminum alloy welding wire.

BODY MOUNTING

The body subframe shall be fastened to the chassis frame with a minimum of six (6) spring loaded body mounts. Each mount shall be configured using a two-piece encapsulated slide bracket. The two (2) brackets shall be fabricated of heavy duty 1/4" thick steel and shall have a powder coat finish to prevent any corrosion. Each mounting assembly shall utilize two (2) 3/4" diameter x 6" long grade 8 bolts and two (2) heavy duty springs. The assembly design shall allow the body and subframe to act as one (1) component, separate from the chassis. As the chassis frame twists under driving conditions, the spring mounting system shall eliminate any stress from being transferred into the body. The spring loaded body mounts shall also prevent frame side rail or body damage caused by unevenly distributed stress and strains due to load and chassis movement.

Body mountings that do not allow relief from chassis movement will not be acceptable.

12" REAR STEP BUMPER

The full width rear bumper shall be constructed from 2" x 2" x 1/4" aluminum tubing frame and covered with 3/16" NFPA compliant aluminum tread plate. The bumper shall extend from the rear vertical body panel 12" and provide a rear step with a minimum of 1/2" space at body for water drainage.

REAR TOW EYES

There shall be two (2) heavy duty rear mounted tow eyes securely attached to the body subframe, below body. The tow eyes shall be fabricated from 3/4" thick steel plate with a 3" diameter opening. Tow eyes shall have a black powder coat finish.

TRAILER HITCH

A Class III weight carrying capacity rear hitch receiver shall be provided below the rear bumper. The receiver shall be attached to chassis frame with heavy duty steel frame work with a black hammertone powder coat paint finish.

The hitch shall be complete with a 2" square receiver. Without the use of a "weight distribution" ball hitch the Class III receiver shall have a capacity of 6,000 lbs. gross trailer weight and a maximum tongue weight of 600 lbs.

A label shall be provided in a location in which it is visible to an operator making trailer connections. The label shall state the maximum GVWR and tongue weight of the trailer that can be safely towed with the hitch system.

Two (2) safety chain attachment points shall be provided near the hitch point for hitches designed to use safety chains, each designed with an ultimate strength of not less than the maximum GVWR specified on label.

TRAILER ELECTRICAL RECEPTACLE

For hydraulic brake equipped or electric brake equipped trailer towing capability, a primary electrical receptacle shall be provided near the hitch point and shall match the umbilical cable specified. Receptacle shall be a 7-Way Blade Type socket, the same as used on most Light Duty Trucks and RV's.

TRAILER AUXILIARY ELECTRICAL RECEPTACLE

An auxiliary electrical receptacle shall be provided near the hitch point and shall match the umbilical cable specified for optical warning lights. Receptacle shall be a 7-Way Pin Type Socket, ISO3731 compliant with a reverse ground terminal.

RECEIVER WITH TRAILER BALL

No hitch receiver with trailer ball will be provided with completed unit.

GROUND LIGHTS

There shall be two (2) OnScene 9" Night Axe white LED lights installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when the vehicle park brake is set.

WHEEL WELL EXTERIOR PANEL

The exterior panel of the body wheel well enclosure shall be constructed from 3/16" smooth aluminum panels.

DIEFORMED BEADED EDGE BODY FENDERS

A die formed beaded edge shall be provided along the radius of the wheel well opening for a finished appearance.

WHEEL WELL LINERS

The wheel wells shall be provided with an easily removable polymer, circular inner fender liner. The inner liner shall be bolted to the wheel well with stainless steel bolts and spaced away from the wheel well so the liner will not accumulate dirt or water.

SCBA CYLINDER COMPARTMENTS

There shall be three (3) SCBA cylinder storage compartments located, two (2) on the curbside, and one (1) on the streetside of rear wheel well area. Each compartment shall be capable of storing two (2) SCBA (60 min.) cylinders. Each compartment shall have a vertically hinged aluminum door with 14ga stainless steel hinge, a positive catch latch and painted primary lower body color. Each compartment shall allow the storage of an SCBA cylinder or a fire extinguisher up to 7-3/4" in diameter x 24" deep. The door shall activate the "Hazard Warning Light" in the cab when not in the closed position.

BODY PAINT SPECIFICATIONS

BODY PAINT PREPARATION

After the body and components have been fabricated they shall be disassembled so when vehicle is complete there shall be finish paint beneath the removable components. The body shall be removed from chassis during the paint process to insure proper paint coverage. The body and components shall be metal finished as follows to provide a superior substrate for painting.

The exterior (and interior, if painted) body shall undergo a thorough cleaning process starting with a biodegradable phosphoric acid solution to begin the etching process followed by a complete clear water rinse. The next step shall consist of a chemical conversion coating applied to seal the metal substrate and become part of the metal surface for greater film adhesion.

All bright metal fittings, if unavailable in stainless steel or polished aluminum, shall be chrome plated. Iron fittings shall be copper under plated prior to chrome plating.

PAINT PROCESS

The paint process shall follow the strict standards set forth by PPG Industries guidelines. Painters applying PPG products will be PPG Certified Commercial Technicians, and re-certified every two (2) years. The body shall go through the following paint process;

- 1) Clean bare metal with a wax and grease remover using low lint rags.
- 2) Inspect, straighten, and hammer high points, grind all seams, sharp edges, and welds. DA sand entire paintable surfaces using 24-180 grit dry paper. Plastic fill all low spots and DA sand fill areas using 36-180 grit dry paper. Apply pinhole filler and DA sand areas using 80-180 grit dry paper.
- 3) Re-clean bare metal using a wax and grease remover and low lint rags.
- 4) Within 24 hours, a PPG Delfleet® epoxy color primer with proper hardener for corrosion resistance using a pressure pot spray gun and applying 2-5 full wet coats or 1.5-8.0 dry mils max. achieving full hiding and allow to air dry 60 minutes @ 70°F or bake for 45 minutes @ 140°F degree.
- 5) Inspect, putty fill, and dry guild coat entire body surface and DA sand using 180-400 grit dry paper.
- 6) Re-clean bare metal using a wax and grease remover using low lint rags.
- 7) A PPG Delfleet® primer sealer with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 1 full wet coat or 1.0-2.0 dry mils achieving full hiding and allow to flash off in spray booth for minimum of 60 minutes @ 70°F.
- 8) A PPG Delfleet® FBCH basecoat (color) with proper hardener and dry additive shall then be sprayed using a pressure pot set @ 45-60 PSI and achieving full hiding or 1.5-2.0 wet mils and allow to flash off in spray booth 45-60 minutes before applying clearcoat.
- 9) A PPG Delfleet® clearcoat with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 2-3 full wet coats or 5.0 wet mils for a uniform gloss and allow to flash off in spray booth 10 minutes and bake for 120-140 minutes @ 125°F (surface temp.).
- 10) After cooling, DA sand heavy orange peel or runs using 1000 grit dry sand paper and final DA sand using 1500-2000 grit dry sand paper. Wipe off all surfaces to remove dust and debris. Buff unit as needed using 3M rubbing compound and a white wool pad and inspect until all sand scratches are removed.
- 11) Polish as needed using 3M Perfect-It-Polish and a black foam pad, repeat as necessary and inspect until all sand scratches are removed.

PAINT - ENVIRONMENTAL IMPACT

The contractor shall meet or exceed all current State (his) regulations concerning paint operations. Pollution control shall include measures to protect the atmosphere, water and soil. PPG Delfleet® Evolution paint shall be free of all heavy metal (lead & chromate) components. Paint emissions from sanding and painting shall be filtered and collected. All paint wastes shall be disposed of in an environmentally safe manner. Solvents used in cleanup operations shall be collected, sent off-site for distillation and returned for reuse.

FASTENERS

Prior to the assembly and reinstallation of exterior components; i.e. warning and DOT lights, handrails, steps, door hardware, and miscellaneous items, a Mylar isolation tape, or gasket shall be used to prevent damage to the finish painted surface. These components shall be fastened to body using either a plastic insert into body metal with stainless steel screws or zinc coated nut-surts into body surface using stainless steel bolts to prevent corrosion from dissimilar metals.

ELECTROLYSIS CORROSION CONTROL

The vehicle shall be assembled using ECK brand or similar corrosion control compound on all high corrosion potential areas.

ECK protects aluminum and stainless steel against electrolytic reaction, isolates dissimilar metals and gives bedding protection for hardware and fasteners. ECK contains anti-seizing lubricant for threads. ECK is dielectric and perfect for use with electrical connectors.

PAINT FINISH - SINGLE COLOR

The body shall be painted with a single color of PPG Delfleet® Evolution per City of Columbus approved paint spray out provided.

A small touch-up bottle of paint shall be provided with completed vehicle.

- Paint Color: Match cab/chassis supplied paint color.

BODY UNDERCOATING

The entire underside of body shall be sprayed with black automotive undercoating. Undercoating shall cover all areas underside of body and wheel well area to help prevent corrosion under the vehicle.

UNDERCOAT WARRANTY

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should

the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

COMPARTMENT INTERIOR FINISH

The interior of all exterior body compartments shall be a "Maintenance Free" smooth unpainted finish. All body seams shall be finished with a caulk sealant for both appearance and moisture protection.

REFLECTIVE STRIPE REQUIREMENTS

Material

All retroreflective materials shall conform to the requirements of ASTM D4956, *Standard Specification for Retroreflective Sheeting for Traffic Control*, Section 6.1.1 for Type I Sheeting.

All retroreflective materials used that are colors not listed in ASTM D4956, Section 6.1.1, shall have a minimum coefficient of retro-reflection of 10 with observation angle of 0.2 degrees and entrance angle of -4 degrees.

Any printed or processed retroreflective film construction used shall conform to the standards required of an integral colored film as specified in ASTM D4956, Section 6.1.1.

Minimum Requirements

A retroreflective stripe(s) shall be affixed to at least 50 percent of the cab and body length on each side, excluding the pump panel areas, and at least 25 percent of the width of the front of the vehicle, not including mirrors or other protrusions.

The stripe or combination of stripes shall be a minimum of 4 in. (100 mm) in total width.

The 4 in. (100 mm) wide stripe or combination of stripes shall be permitted to be interrupted by objects (i.e., receptacles, cracks between slats in roll up doors) provided the full stripe is seen as conspicuous when approaching the apparatus.

A graphic design shall be permitted to replace all or part of the required striping material if the design or combination thereof covers at least the same perimeter length(s).

GRAPHICS PROOF

A color graphics proof of the reflective striping layout shall be provided for approval by City of Columbus prior to installation. The graphics proof shall be submitted to City of Columbus on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition, if there is any special art work an additional sheet shall be provided showing all details. Note: The graphics color proof may not reflect the correct paint break lines on the chassis and body please refer to the paint section of your specifications for correct paint break lines.

REFLECTIVE STRIPE - CAB SIDE

The reflective stripe material shall be 8" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color.

There shall be a 1" Scotchlite reflective stripe located 1" above and a second 1" Scotchlite reflective stripe located 1" below the main stripe.

- This reflective stripe shall be gold in color.

REFLECTIVE STRIPE - CAB FRONT

The reflective stripe material shall be 8" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color.

There shall be a 1" Scotchlite reflective stripe located 1" above and a second 1" Scotchlite reflective stripe located 1" below the main stripe.

- This reflective stripe shall be gold in color.

REFLECTIVE STRIPE - BODY SIDES

The reflective stripe material shall be 8" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color.

There shall be a 1" Scotchlite reflective stripe located 1" above and a second 1" Scotchlite reflective stripe located 1" below the main stripe.

- This reflective stripe shall be gold in color.

The stripe shall remain in a straight line from the front of the front of cab to the rear body.

REFLECTIVE STRIPE - REAR OF BODY

A 8" reflective stripe shall be provided on rear face of body.

- The stripe material shall be 3M Scotchlite 680 series graphic film.
- This reflective stripe shall be white in color.

There shall be a 1" Scotchlite reflective stripe located approx. 1" above the main stripe.

- This reflective stripe shall be gold in color.

CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS

At least 50 percent of the rear-facing vertical surfaces, visible from the rear of the apparatus, excluding any pump panel areas not covered by a door, shall be equipped with retroreflective striping in a chevron pattern sloping downward and away from the centerline of the vehicle at an angle of 45 degrees. Each stripe shall be 6" width.

The rear side panels of the body on each side of a rear stairway or compartment shall have a chevron style reflective stripe, extending from bumper height up to side compartment drip rail height. Each chevron panel shall be a full sheet and shall have a 3M UV over laminate to protect from UV rays, scene damage, and everyday use. Chevron panel shall have a minimum 10 year warranty for material failure, and colorfastness.

The stripe material shall be 3M Diamond Grade.

This reflective chevron stripe shall alternate red and fluorescent yellow-green in color.

LETTERING

GRAPHICS PROOF

A color graphics proof of the lettering layout shall be provided for approval by City of Columbus prior to installation. The graphics proof shall be submitted to City of Columbus on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details.

The following lettering shall be provided and installed on the completed unit as follows;

SIDE CAB DOOR LETTERING

There shall be forty two (42) 4" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be red and blue in color.

There shall be four (4) 20" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be white in color.

UPPER BODY SIDE LETTERING

There shall be four (4) 16" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be white in color.

There shall be fourteen (14) 4" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be red in color.

There shall be forty six (46) 10" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be white in color.

There shall be six (6) 8" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be blue in color.

There shall be twelve (12) 4" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be red in color.

There shall be two (2) 16" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be white in color.

FRONT OF CAB LETTERING

There shall be twelve (12) 3" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be white in color.

There shall be eight (8) 10" high reflective letters furnished and installed on the vehicle.

Location to be on the Upper Front raised area of the roof, RESCUE #

- This reflective lettering shall be white in color.

CAB ROOF LETTERING

There shall be four (4) 22" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be white in color.

CUSTOM DECAL LOGO - 12" -18"

One (1) custom designed 12" - 18" 3M Scotchlite type retroreflective logo shall be provided and located on the completed vehicle. The exact design and/or artwork shall be provided by the City of Columbus prior to construction.

One (1) copy of the above custom logo shall be provided and located on the completed vehicle as directed by City of Columbus.

SUPPLIED DECALS

The bidder shall install two (2) City of Columbus supplied decal(s) on the vehicle, located on the.

EXTERIOR COMPARTMENT DOORS

ROLL-UP DOOR CONSTRUCTION - AMDOR

The apparatus shall be equipped with Amdor brand exterior roll-up compartment doors. Amdor roll-up doors shall be complete with the following features;

- 1" aluminum double wall slats with continuous ball & socket hinge joint and recessed dual durometer slat seal
- Double wall reinforced bottom panel with stainless steel lift bar latching system
- Bottom panel flange with cut-outs for ease of access with gloved hands
- Reusable slat shoes with positive snap-in securement
- Smooth interior door curtain to prevent equipment hang-ups
- One-piece aluminum door track / side frame, top gutter with non-marring seal
- Non-marring recessed side seals with UV stabilizers to prevent warping
- Dual leg bottom seal, with all wear component material to be Type 6 Nylon
- The door shall be warranted for a period of 36 months from the date of delivery. AMDOR Inc. liability covers the replacement or repair of any component that fails due to defects in material and / or workmanship during the coverage period.

Each shutter door shall decrease the compartment door frame opening approximately 2.00" in width and approximately 5.50" in height for the bottom section of door assembly.

The specified retroreflective stripe material shall be applied on the roll-up compartment doors. The stripe shall be precision machine cut for each door slat of the roll-up doors. Under no circumstance will the stripe material be cut on roll-up door surface.

BODY HEIGHT MEASUREMENTS

The vertical body dimensions shall be as follows:

AHEAD OF REAR AXLE

Description	Dimension
A Bottom of Subframe to Top of Body	88.7"
B Bottom of Subframe to Bottom of Body	22.5"
C Total Body Height	111.2"
D Compartment Height Above Frame	48.0"
E Compartment Height Below Frame	25.0"
F Vertical Door Opening:	
-with roll-up door	65.0"
-with hinged door	68.5"

ABOVE REAR AXLE

Description	Dimension
G Vertical Door Opening - Above Rear Wheel	
-with roll-up door	34.0"
-with hinged door	37.5"

BEHIND REAR AXLE

Description	Dimension
H Bottom of Subframe to Bottom of Body	20.0"
I Compartment Height Above Frame	48.0"
J Compartment Height Below Frame	22.5"
K Vertical Door Opening:	
-with roll-up door	62.0"
-with hinged door	65.5"

GENERAL

Description	Dimension
L Top of Body to Bottom of Drip Rail	38.5"

(Dimensions are approximate and subject to change during construction or design process.)

TWO (2) UPPER BODY COMPARTMENTS (INDIVIDUAL)

There shall be two (2) compartments parallel to the sides of the body, one (1) on each side. Street side compartment shall be approximately 120.0" long x 37.0" wide x 29.5" deep and the curb side compartment shall be approximately 120.0" long x 33.0" wide x 29.5" deep. The side compartments shall be open under each door sill to allow for long equipment. Each compartment shall be integral with the body construction, and will not be bolted or add-on modules. The outside walls of each compartment will be double walled to prevent equipment from denting the outside painted surface.

Each compartment shall have a lift-up type compartment door hinged on the outboard side. Each door shall be fabricated from 3/16" aluminum tread plate. Each door shall have two (2) pneumatic type cylinders, one (1) at each end, attached to cast aluminum brackets mounted to the interior surface of the door to hold the door in both the opened and closed positions. Each door shall be mounted using 16" long, equally spaced, 14 gauge stainless steel hinges, with 1/4" stainless steel pin. A polyester barrier film gasket shall be placed between stainless steel hinge and the body mounting surface as necessary to prevent corrosion caused by dissimilar metals.

Each compartment door shall overlap a 2" vertical lip on the body roof to prevent entry of moisture and sealed with automotive type rubber molding to provide a weather resistant seal.

Each roof compartment door shall have a chrome 7" handle bolted to center of each door.

Each compartment shall have a horizontally mounted OnScene Solutions LED Night Stik on the underside of the door. The light and NFPA Door Ajar System shall be automatically activated by an individual switch per compartment.

The following equipment shall be stored in roof compartments;

Curbside upper body compartment shall have a 30" clear opening.

- One (1) stokes basket(s). Manufacturer, model number and size of stokes basket shall be provided in equipment section of specification or at pre-construction meeting when provided by City of Columbus.

- One (1) backboard(s). Manufacturer, model number and size of the backboard(s) shall be provided in equipment section of specification or at pre-construction meeting when provided by City of Columbus.
- One (1) rescue tri-pod(s). Manufacturer, model number and size of the tri-pod shall be provided in equipment section of specification or at pre-construction meeting when provided by City of Columbus.

Roof Compt. No Door Latch

SIDE ROOF COMPARTMENT - SHELF TRAC

The upper body side compartments shall be provided with horizontally mounted aluminum Shelf-Trac welded to the walls for vertical partition installation and adjustability.

ROOF COMPARTMENT - VERTICAL PARTITION

There shall be two (2) vertical partition(s) provided in the streetside roof compartment(s). The partition(s) shall be used to retain or hold equipment in place during travel. Each partition shall be fabricated from 3/16" smooth aluminum and bolted to specified Shelf-Trac for ease of adjustment.

UPPER BODY WALKWAY

A 30" wide, upper body walkway shall be provided at the center of body and recessed into the roof structure. The walkway shall be fabricated from NFPA compliant 3/16" aluminum tread plate with continuously welded cross seams to prevent moisture penetration into apparatus body, No Exceptions. The walkway shall be supported with 2" x 2" tubing on 14" - 22" centers.

13/16" drains shall be installed at front of walkway connected to 1" flexible drain tubes that will terminate below the body.

WALKWAY/STEP LIGHTS

There shall be three (3) OnScene Solutions Rough-Service 9" LED lights provided to illuminate the walkway or step area.

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

ACCESS LADDER

The top of the body shall be accessible from the ground by a folding style ladder. The ladder design shall have a main pivoting ladder section with a fixed bolt-on upper hand rail section that extends just above top surface. The lower step section of ladder shall fold-out creating an angled ladder that brings the first step closer to ground for easier step height access and a comfortable climbing angle. The ladder shall fold-up and store in vertical position for better angle of departure.

Each cast aluminum step shall be 4-1/2" deep x 16" wide. Hand railing shall be 2-1/8" oval shaped aluminum tubing with a ribbed gripping surface.

The ladder shall be wired to the door ajar warning light in cab to warn the driver that the ladder is in the down position. Ladder shall be mounted to body with stainless steel bolts.

Ladder shall be located on rear curbside of the body.

There shall be an aluminum treadplate scuff panel on rear body between roof access ladder and upper body walk way.

WALKWAY/STEP LIGHTS

There shall be two (2) OnScene Solutions Rough-Service 9" LED lights provided to illuminate the walkway or step area.

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

WALKWAY EXTENSION STEP

A full walkway width x 8.5" deep, bolt-on type extension step shall be provided for safe transition from specified ladder to center walkway area. Step shall be fabricated from 3/16" NFPA compliant treadplate aluminum with side gusset supports to body. The specified center rear marker lights shall be located on rear facing edge. The underside of step shall have an 28" OnScene LED light to light the bumper or compartment area below.

ROOF ACCESS HANDRAIL

There shall be one (1) 24" horizontal handrail mounted on top of body to assist in roof access. Handrail shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

MAN SAVER BAR

There shall be (1) 30" FRC Man Saver Bar #MSA110-A30 located on the upper body apparatus walkway. The Man Save Bar shall be mounted so the the base of the bar is located on the streetside of the upper body walkway.

BODY WIDTH DIMENSIONS

The walk thru body shall be 100.0" wide, and 102.0" wide at drip rails. Interior compartment depth dimensions shall be approximately:

Area Description	Dimension
Transverse above subframe:	95.0" (If specified.)
Compartment depth above subframe:	31.0" (To walkway wall.)

Compartment depth below subframe: 24.5"

Walkway width: 34"

STREETSIDE COMPARTMENT - FRONT (S1)

The interior useable compartment width shall be approximately 49.5" wide.

The compartment door opening shall be approximately 42.2" wide.

This compartment shall have an Amdor roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The Amdor door shall be equipped with an integral switch located high in the upper door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
 - There shall be two (2) bolt-in shelf approximately 18" deep, between tool boards. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge. Shelves to be mounted on back wall of compartment for City of Columbus supplied Genesis electric power unit (upper) and gas power unit (lower). The lower shelf will have hose storage and a OnScene velcro strap..
 - Location TBD at PreCon.
- The above component(s) shall have a smooth un-painted finish.
- There shall be one (1) 400 lbs. slide-out tray(s) approximately 24" deep and as wide as the compartment layout or door opening permits. The tray top shall be fabricated from 3/16" 3003 aluminum sheet with a 3" vertical lip and welded corners to form a box type tray surface. The sliding tracks shall extend 100% of the slide length. The tray assembly shall utilize a pneumatic cylinder mounted on underside to hold the tray in both the extended and closed positions.
- The above component(s) shall have a smooth un-painted finish.
- 3M™ Diamond Grade™ striping shall be provided on the front and side faces of the tray. The stripe shall alternate red and fluorescent yellow-green in color.
- There shall be two (2) slide-out smooth aluminum vertical tool board(s) approximately 24" deep. Each tool board(s) vertical exterior edge shall have a double 90 degree formed edge to provide an easy grip handle. The top and bottom of tool board(s) shall be provided with Accuride 9300 series slide tracks. Each board shall be rated for a maximum 200 lbs. evenly distributed load. Each tool board shall utilize a pneumatic cylinder to hold the tool board in both the opened and closed positions.
- The vertical tool board material shall be 3/16" (.188) 3003H-14 aluminum alloy sheet.
- The above component(s) shall have a smooth un-painted finish.

- Six (6) bolt-on shelf unit(s), 6" deep x width of tool board shall be provided on specified tool board(s). Each shelf shall have a 2" vertical lip with 45 degree side gussets for reinforcement.
- Each tool board will be bolted to compartment floor.
- There shall be one (1) OnScene Solutions cargo straps provided to secure the stored equipment.
- 3M™ Diamond Grade™ striping shall be provided on both sides of the tool board. The stripe shall alternate red and fluorescent yellow-green in color.
- There shall be one (1) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
 - The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
 - Two (2) Hannay EF2016-17-18 hydraulic hose reel(s) with painted finish capable of storing 100' of dual line hydraulic hose shall be provided. Reel(s) shall be mounted to channel structure that allows for side-to-side adjustment of reel position.
- Power rewind control(s) shall be in a position where the operator can observe the rewinding operation and not be more than 72 in. (1830 mm) above the operator's standing position, and shall be marked with a label indicating its function and shall be guarded to prevent accidental operation.
- Reel Location TBD at PreCon.
- Above specified reel(s) to have upgraded polished chrome drum, disc, and frame.
 - The hydraulic reel shall be equipped with 100' of Genesis dual hydraulic hose. The hose shall be Black in color. All Hydraulic connections shall be quick connects.
 - The hydraulic reel shall connect to the hydraulic pump with one (1) 6' Genesis pigtails. The hoses shall be Black in color. All Hydraulic connections shall be quick connects.
 - The hydraulic reel shall be equipped with 100' of Genesis dual hydraulic hose. The hose shall be Yellow in color. All Hydraulic connections shall be quick connects.

- The hydraulic reel shall connect to the hydraulic pump with one (1) 6' Genesis pigtails. The hoses shall be Yellow in color. All Hydraulic connections shall be quick connects.
- The reel shall be supplied with OnScene Solutions fairlead extension with a 6" - 10" extension (depending on compartment depth). The fairlead extension shall allow hoses or cords to be extended out and away from compartment door edges, slide trays, or shelving that may result in wear damage.
- Two (2) OnScene Night Axe white LED, full height compartment lights, vertically mounted.
- One (1) City of Columbus supplied electric hydraulic power unit(s) shall be mounted in compartment. One (1) 240 VAC twist lock switched receptacle(s) shall be provided on back wall with switch(es) at door opening within easy reach of operator for turning the power unit(s) On/Off.
- Location TBD at PreCon.
- One (1) City of Columbus supplied gas powered hydraulic power unit(s) shall be mounted in compartment.

STREETSIDE COMPARTMENT - AHEAD OF REAR WHEELS (S2)

The interior useable compartment width shall be approximately 49.5" wide.

The compartment door opening shall be approximately 42.2" wide.

This compartment shall have an Amdor roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The Amdor door shall be equipped with an integral switch located high in the upper door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.

- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) adjustable shelf/shelves approximately 24" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge.
- The above component(s) shall have a smooth un-painted finish.
 - There shall be one (1) 400 lbs. slide-out tray(s) approximately 24" deep and as wide as the compartment layout or door opening permits. The tray top shall be fabricated from 3/16" 3003 aluminum sheet with a 3" vertical lip and welded corners to form a box type tray surface. The sliding tracks shall extend 100% of the slide length. The tray assembly shall utilize a pneumatic cylinder mounted on underside to hold the tray in both the extended and closed positions.
- The above component(s) shall have a smooth un-painted finish.

- 3M™ Diamond Grade™ striping shall be provided on the front and side faces of the tray. The stripe shall alternate red and fluorescent yellow-green in color.
 - There shall be one (1) slide-out smooth aluminum vertical tool board(s) approximately 24" deep. Each tool board(s) vertical exterior edge shall have a double 90 degree formed edge to provide an easy grip handle. The top and bottom of tool board(s) shall be provided with Accuride 9300 series slide tracks. Each board shall be rated for a maximum 200 lbs. evenly distributed load. Each tool board shall utilize a pneumatic cylinder to hold the tool board in both the opened and closed positions.
- The vertical tool board material shall be 3/16" (.188) 3003H-14 aluminum alloy sheet.
- The above component(s) shall have a smooth un-painted finish.
- One (1) bolt-on shelf unit(s), 6" deep x width of tool board shall be provided on specified tool board(s). Each shelf shall have a 2" vertical lip with 45 degree side gussets for reinforcement.
- Each tool board will be bolted to compartment floor.
- 3M™ Diamond Grade™ striping shall be provided on both sides of the tool board. The stripe shall alternate red and fluorescent yellow-green in color.
 - One (1) Hannay ECR1618-17-18 240 volt electric cable reel(s) capable of storing 200' of 10/4 electric cable. Reel(s) shall be designed to hold 110% of the capacity of cord length, with fully enclosed 60 amp, four (4) conductor collector rings. Reel(s) shall be mounted to channel structure that allows for side-to-side adjustment of reel position.
- Power rewind control(s) shall be in a position where the operator can observe the rewinding operation and not be more than 72 in. (1830 mm) above the operator's standing position, and shall be marked with a label indicating its function.
- A label shall be provided in a visible location adjacent to reel with following information: Current rating, Current type, Phase, Voltage, and Total cord length.
- Reel location TBD at PreCon.
- The electric cord reel shall be equipped with 200' of 10/4 SEOW yellow cord, a molded plastic ball clamp, and a single heavy duty L14-30 twist-lock female plug.

- One (1) Akron model EJBX series, cast aluminum electrical power distribution box with gray powder coat finish shall be provided. The power distribution box shall meet all requirements described in NFPA 1901. The power distribution box shall include the following outlets mounted on a backlit face plate;
 - A 12" pigtail that terminates in an L14-30 configuration to match the cable on the cord reel. The outlet configuration shall include:
 - One (1) L5-20 duplex straight blade receptacle
 - One (1) 5-20 duplex straight blade receptacle
 - One (1) 120 VAC, L5-20 single twist lock receptacle.
 - One (1) 120 VAC, L5-20 single twist lock receptacle.
 - One (1) Akron Brass model EJB-VMT aluminum treadplate vertical mounting bracket for specified power distribution box shall be provided and mounted in compartment per City of Columbus.
 - The reel shall be supplied with OnScene Solutions fairlead extension with a 6" - 10" extension (depending on compartment depth). The fairlead extension shall allow hoses or cords to be extended out and away from compartment door edges, slide trays, or shelving that may result in wear damage.
 - Two (2) OnScene Night Axe white LED, full height compartment lights, vertically mounted.
 - There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
- The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
- Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.
 - There shall be one (1) 240 VAC outlet(s) located in compartment mounted on the forward wall.
- The outlet receptacle(s) shall be 20 amp, twist-lock (NEMA L6-20R).
- Outlet(s) shall be powered through the on-board generator system.

- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S3)

The interior useable compartment width shall be approximately 59.5" wide.

The compartment door opening shall be approximately 52.2" wide.

This compartment shall have an Amdor roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The Amdor door shall be equipped with an integral switch located high in the upper door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) transverse module fabricated from 3/16" (.188) 3003H-14 aluminum alloy smooth sheet. The module will be designed for the following long tools and equipment:
 - One (1) City of Columbus supplied stokes basket(s). Manufacturer, model number and dimensions of the stokes basket(s) shall be provided during the pre-construction meeting.
 - Two (2) City of Columbus supplied backboard(s). Manufacturer, model number and dimensions of the backboard(s) shall be provided during the pre-construction meeting.
 - There shall be one (1) OnScene Solutions cargo straps provided to secure the stored equipment.
- There shall be one (1) transverse floor storage slots for (8) 4X4's
- Two (2) OnScene Night Axe white LED, full height compartment lights, vertically mounted.

STREETSIDE COMPARTMENT - REAR (S4)

The interior useable compartment width shall be approximately 64.5" wide.

The compartment door opening shall be approximately 57.2" wide.

This compartment shall have an Amdor roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The Amdor door shall be equipped with an integral switch located high in the upper door track to activate compartment lighting and door ajar signal in cab when door is opened.

- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
 - There shall be one (1) adjustable shelf/shelves approximately 24" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge.
- The above component(s) shall have a smooth un-painted finish.
- There shall be one (1) OnScene Solutions 81 series aluminum tray base with rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 46" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Slide base shall extend depth specified, less 4". Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and redpull handle (Pull to Release) which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".

- There shall be one (1) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
- The above component(s) shall have a smooth un-painted finish.
- 3M™ Diamond Grade™ striping shall be provided on the front and side faces of the tray. The stripe shall alternate red and fluorescent yellow-green in color.
 - There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 250 lbs. Slide-out tray(s) base shall be approximately 46" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
- There shall be two (2) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
- The above component(s) shall have a smooth un-painted finish.
 - There shall be one (1) bolt-in vertical compartment partition(s) provided dividing the compartment into left and right sides. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
- The above component(s) shall have a smooth un-painted finish.
 - There shall be one (1) removable aluminum tool box(s) with handles. Each box shall be fabricated from 3/16" (.188) 3003H-14 aluminum alloy sheet.
 - Design TBD at PreCon.
 - There shall be three (3) removable plastic tool box(s) with hand holes for carrying. Each tool box shall be fabricated from ½" (.50) textured finish polypropylene sheet. Tool boxes shall sit on width of specified adjustable shelf.
 - The floor of the compartment above the frame rails shall be extended to the interior edge of the door for half the width of door opening. The floor shall have a 2" vertical lip and a 1" return to increase strength.

- Two (2) OnScene Night Axe white LED, full height compartment lights, vertically mounted.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

CURBSIDE COMPARTMENT - FRONT (C1)

The interior useable compartment width shall be approximately 49.5" wide.

The compartment door opening shall be approximately 42.2" wide.

This compartment shall have an Amdor roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The Amdor door shall be equipped with an integral switch located high in the upper door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
 - There shall be two (2) bolt-in shelf approximately 18" deep, between tool boards. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge. Shelves to be mounted on back wall of compartment for City of Columbus supplied Genesis electric power unit (upper) and gas power unit (lower). The lower shelf will have hose storage and a OnScene velcro strap.
 - Location TBD at PreCon
- The above component(s) shall have a smooth un-painted finish.
- There shall be one (1) 400 lbs. slide-out tray(s) approximately 24" deep and as wide as the compartment layout or door opening permits. The tray top shall be fabricated from 3/16" 3003 aluminum sheet with a 3" vertical lip and welded corners to form a box type tray surface. The sliding tracks shall extend 100% of the slide length. The tray assembly shall utilize a pneumatic cylinder mounted on underside to hold the tray in both the extended and closed positions.
- The above component(s) shall have a smooth un-painted finish.
- 3M™ Diamond Grade™ striping shall be provided on the front and side faces of the tray. The stripe shall alternate red and fluorescent yellow-green in color.
- There shall be two (2) slide-out smooth aluminum vertical tool board(s) approximately 24" deep. Each tool board(s) vertical exterior edge shall have a double 90 degree formed edge to provide an easy grip handle. The top and bottom of tool board(s) shall be provided with Accuride 9300 series slide tracks. Each board shall be rated for a maximum 200 lbs. evenly distributed load. Each tool board shall utilize a pneumatic cylinder to hold the tool board in both the opened and closed positions.
- The vertical tool board material shall be 3/16" (.188) 3003H-14 aluminum alloy sheet.

- There shall be two (2) "J" style rope or equipment hook(s) for mounting of electrical extension cords or rescue ropes.
- There shall be six (6) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
- There shall be two (2) OnScene Solutions cargo straps provided to secure the stored equipment.
- The above component(s) shall have a smooth un-painted finish.
- Six (6) bolt-on shelf unit(s), 6" deep x width of tool board shall be provided on specified tool board(s). Each shelf shall have a 2" vertical lip with 45 degree side gussets for reinforcement.
- Each tool board will be bolted to compartment floor.
- 3M™ Diamond Grade™ striping shall be provided on both sides of the tool board. The stripe shall alternate red and fluorescent yellow-green in color.
 - The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
 - Two (2) Hannay EF2016-17-18 hydraulic hose reel(s) with painted finish capable of storing 100' of dual line hydraulic hose shall be provided. Reel(s) shall be mounted to channel structure that allows for side-to-side adjustment of reel position.
- Power rewind control(s) shall be in a position where the operator can observe the rewinding operation and not be more than 72 in. (1830 mm) above the operator's standing position, and shall be marked with a label indicating its function and shall be guarded to prevent accidental operation.
- Reel location TBD at PreCon.
- Above specified reel(s) to have upgraded polished chrome drum, disc, and frame.
 - The hydraulic reel shall be equipped with 100' of Genesis dual hydraulic hose. The hose shall be Red in color. All Hydraulic connections shall be quick connects.
 - The hydraulic reel shall connect to the hydraulic pump with one (1) 6' Genesis pigtails. The hoses shall be Red in color. All Hydraulic connections shall be quick connects.

- The hydraulic reel shall be equipped with 100' of Genesis dual hydraulic hose. The hose shall be Blue in color. All Hydraulic connections shall be quick connects.
- The hydraulic reel shall connect to the hydraulic pump with one (1) 6' Genesis pigtails. The hoses shall be Blue in color. All Hydraulic connections shall be quick connects.
- The reel shall be supplied with OnScene Solutions fairlead extension with a 6" - 10" extension (depending on compartment depth). The fairlead extension shall allow hoses or cords to be extended out and away from compartment door edges, slide trays, or shelving that may result in wear damage.
- The cab chassis supplied cab tilt control pendant shall be re-located to lower forward wall.
- Two (2) OnScene Night Axe white LED, full height compartment lights, vertically mounted.
- The generator gauge panel. Location TBD at PreCon.
- One (1) City of Columbus supplied electric hydraulic power unit(s) shall be mounted in compartment. One (1) 240 VAC twist lock switched receptacle(s) shall be provided on back wall with switch(es) at door opening within easy reach of operator for turning the power unit(s) On/Off.
- Location TBD at PreCon.

CURBSIDE COMPARTMENT - AHEAD OF REAR WHEEL (C2)

The interior useable compartment width shall be approximately 49.5" wide.

The compartment door opening shall be approximately 42.2" wide.

This compartment shall have an Amdor roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The Amdor door shall be equipped with an integral switch located high in the upper door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be two (2) adjustable shelf/shelves approximately 26" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge.

Tray shall be 26" deep and to be notched around vertical exhaust. One tray will be made to fit vertically adjustable below frame level and the other will be fit to be vertically adjustable above frame level.

- The above component(s) shall have a smooth un-painted finish.

- 3M™ Diamond Grade™ striping shall be provided on the front faces of shelf(s). The stripe shall alternate red and fluorescent yellow-green in color.
 - Two (2) OnScene Night Axe white LED, full height compartment lights, vertically mounted.
 - There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
- The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
- Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.
 - There shall be one (1) 240 VAC outlet(s) located in compartment mounted on the forward wall.
- The outlet receptacle(s) shall be 20 amp, twist-lock (NEMA L6-20R).
- Outlet(s) shall be powered through the on-board generator system.
 - Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C3)

The interior useable compartment width shall be approximately 59.5" wide.

The compartment door opening shall be approximately 52.2" wide.

This compartment shall have an Amdor roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The Amdor door shall be equipped with an integral switch located high in the upper door track to activate compartment lighting and door ajar signal in cab when door is opened.

- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be a transverse storage module which extends from the opposite side of the body (specified in opposite side compartment).
- There shall be one (1) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
 - Two (2) OnScene Night Axe white LED, full height compartment lights, vertically mounted.

CURBSIDE COMPARTMENT - REAR (C4)

The interior useable compartment width shall be approximately 64.5" wide.

The compartment door opening shall be approximately 57.2" wide.

This compartment shall have an Amdor roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The Amdor door shall be equipped with an integral switch located high in the upper door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
 - There shall be one (1) adjustable tool mounts. Each mount shall be fabricated from 3/16" 3003 aluminum sheet. Final design TBD at PreCon..
- The above component(s) shall have a smooth un-painted finish.

- There shall be one (1) adjustable shelf/shelves approximately 26" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge.
- The above component(s) shall have a smooth un-painted finish.
- 3M™ Diamond Grade™ striping shall be provided on the front faces of shelf(s). The stripe shall alternate red and fluorescent yellow-green in color.
- There shall be one (1) OnScene Solutions 81 series aluminum tray base with rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 46" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Slide base shall extend depth specified, less 4". Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and redpull handle (Pull to Release) which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
- Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
- There shall be a stationary tray mounted to the vertical tool board.
- There shall be one (1) OnScene Solutions cargo straps provided to secure the stored equipment.
- The above component(s) shall have a smooth un-painted finish.
- 3M™ Diamond Grade™ striping shall be provided on the front and side faces of the tray. The stripe shall alternate red and fluorescent yellow-green in color.
- Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
 - There shall be two (2) aluminum tubes for storing long tools. Each tube shall be fabricated from aluminum alloy sheet.
 - Final design TBD at PreCon.
- There shall be four (4) OnScene Solutions Velcro cargo straps provided to secure the stored equipment on rearward wall. Final location TBD at PreCon.

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
 - Two (2) OnScene Night Axe white LED, full height compartment lights, vertically mounted.
 - There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
- Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

REAR COMPARTMENT - CENTER (RC1)

The rear center compartment shall be closed to both side rear compartments.

The rear center compartment shall start at the bottom of the body and shall be as high as the body permits.

The interior useable compartment width shall be approximately 45.0" wide.

The compartment door opening shall be approximately 38.0" wide.

- This compartment shall have flush fitting vertically hinged compartment door. The door exterior shall be painted job color.
- There shall be access panels provided on doors for the upper and lower locking devices
- The interior door panel shall have a smooth un-painted aluminum panel.
- The door ajar switch shall be provided with specified hinged door and pneumatic cylinder switch assembly to activate compartment lighting and door ajar signal in cab when door is opened.

- The hinged door(s) shall have a stainless steel 6" offset bent D-ring non-locking handle. A gasket shall be placed between handle and door. Door latches shall be a two-point rotary slam, double-catch latch, recessed inside the double panel door with striker plate.
- The hinged door(s) shall have a pneumatic cylinder to hold door in the open and closed positions. Each door shall be capable of being closed without unlatching. Door checks shall be bolted to the compartment door header and the box pan of the door.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
 - There shall be two (2) adjustable shelf/shelves approximately 60" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
- The above component(s) shall have a smooth un-painted finish.
 - 3M™ Diamond Grade™ striping shall be provided on the front faces of shelf(s). The stripe shall alternate red and fluorescent yellow-green in color.
 - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
- There shall be one (1) storage module(s) for seven (7) or more air bags. The module shall be fabricated from 1/8" (.125) 3003H-14 aluminum alloy sheet. Circular notches shall be provided along the front edge to ease the access to the air bags. Each bay shall be sized to hold the air bag and a matching piece of 1/2" plywood (plywood not provided).

The make, model, qty and exact dimensions (inc. nipple) of the City of Columbus supplied air bags shall be prior to pre-construction meeting.

- There shall be three (3) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
 - There shall be one (1) SCBA cylinder storage module for 7-5/8" OD (maximum) SCBA bottles. The maximum length of the SCBA cylinder shall be 24.75". The module shall have an exterior shell fabricated from 1/8" (.125) 3003H-14 aluminum alloy sheet. The module shall have a 2" slope, front to back to prevent cylinders from sliding out. The SCBA cylinder storage tubing shall be fabricated from PVC pipe to prevent damage or abrasion to cylinders. In addition there shall be rubber pad provided in the base of each storage tube for bottle protection and to prevent slipping.
- The SCBA cylinder module shall be capable of storing eight (8) SCBA cylinders up to 7-5/8" diameter.
 - There shall be five (5) removable plastic tool box(s) with hand holes for carrying. Each tool box shall be fabricated from 1/2" (.50) textured finish polypropylene sheet.
 - Two (2) OnScene Night Axe white LED, full height compartment lights, vertically mounted.

PLASTIC FLOOR AND SHELF TILE

Dri-Dek 12" x 12" x 9/16", self-draining plastic inter-locking material shall be cut to size and cover all compartment floors, shelves, and trays.

- The plastic floor tile shall be black.
- The plastic edge trim shall be black.

ROPE ANCHOR OR PORTABLE WINCH RECEIVERS

The completed unit shall have an integrated receiver or anchor system for use with removable rope anchor point and/or a portable electric winch, when specified.

Receivers or anchors installed at any location on the apparatus for use as removable winch anchors shall be designed and affixed to provide at least a 2.0 to 1 straight line pull no-yield safety factor over the load rating of the removable winch.

Receivers or anchors installed at any location on the apparatus for use with rope operations shall be designed and affixed to the apparatus to provide at least a 9,000 lbf (40,000 N) no-yield condition with a straight line pull.

A safety sign FAMA28 shall be located on or near each receiver or anchor stating the maximum straight line pull rating.

Side receiver(s) (if specified) shall have the following load rating:

	STRAIGHT PULL	SAFETY FACTOR
Rope Tie Off:	600 Lbs.	15:1
Winch:	5,000 Lbs.	2:1

Front and/or rear receiver(s) (if specified) shall have the following load rating:

	STRAIGHT PULL	SAFETY FACTOR
Rope Tie Off:	600 Lbs.	15:1
Winch:	Winch Load Rating (9,000 Lbs. Max)	2:1

The following items shall be provided to accomplish rope rescue and/or portable winch operation;

ROOF LOCATIONS

- Four (4) rope anchor point receiver(s) shall be provided and located on outboard edges of body roof area. The receiver(s) shall be manufactured using 2" x 2" x 1/4" wall steel trailer style receiver tube welded to 6" x 4" x 1/2" thick steel plate base and bolted to body structure. Anchor point will add 3-1/4" to body height and does not extend beyond body (without anchor point). The receiver assembly shall have a black powder coat paint finish. Each receiver location shall have a stainless steel scuff plate to protect paint on upper body. Reinforcements to body shall be added as necessary to increase the structural integrity and to provide a working weight rating of 600 lbs., with a 9,000 lbs. maximum load based upon using a 15:1 safety factor to match typical 1/2" rescue rope ratings.

ACCESSORIES

- Two (2) removable rope anchor(s) shall be provided for use with upper body specified receivers. Each rope anchor shall be fabricated from 3/4" steel, 2" high x 11.5" long with a 3" OD/2" ID eyelet.

Eyelet end shall have radiused edge to prevent damage to rope or carabineer. Each rope anchor shall have a black powder coat paint finish.

- A steel 5/8" x 3" hitch pin shall lock the rope anchor into the receiver tube.

ACCESSORIES

- Two (2) removable rope anchor(s) shall be provided for use with lower body specified receivers. Each rope anchor shall be fabricated from 3/4" steel, 2" high x 11.5" long with a 3" OD/2" ID eyelet. Eyelet end shall have radiused edge to prevent damage to rope or carabineer. Each rope anchor shall have a black powder coat paint finish.
- A steel 5/8" x 3" hitch pin shall lock the rope anchor into the receiver tube.
- An aluminum mounting bracket shall be provided to store rope anchor(s) inside a body compartment as close to receiver location as possible.

FRONT BUMPER

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with a black hammertone powder coat paint finish located at the front bumper for use with removable rope anchor point and/or a portable electric winch (if specified).
- There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Warn portable winch. All 12 VDC cables to be sized according to Warn and installation for intended use.
- The receiver(s) shall have one (1) rubber cover(s) provided.

STREETSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the streetside of the body in the forward wheel well panel area for use with removable rope anchor and/or a portable electric winch (when specified).
- There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Warn portable winch. All 12 VDC cables to be sized according to Warn and installation for intended use.

- One (1) 12" x 2" M x 2" F winch mounting adapter(s) shall be provided. Winch adapter will extend the specified portable winch 6" from receiver. An aluminum mounting bracket shall be provided to store winch adapter(s) inside a body compartment as close to receiver location as possible.
- The receiver(s) shall have one (1) rubber cover(s) provided.

CURBSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the curbside of the body in the forward wheel well panel area for use with removable rope anchor and/or a portable electric winch (when specified).
- There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Warn portable winch. All 12 VDC cables to be sized according to Warn and installation for intended use.
- One (1) 12" x 2" M x 2" F winch mounting adapter(s) shall be provided. Winch adapter will extend the specified portable winch 6" from receiver. An aluminum mounting bracket shall be provided to store winch adapter(s) inside a body compartment as close to receiver location as possible.
- The receiver(s) shall have one (1) rubber cover(s) provided.

REAR BUMPER

- The specified rear trailer hitch shall be compatible with the removable rope anchor point and/or a portable electric winch (when specified).
- There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Warn portable winch. All 12 VDC cables to be sized according to Warn and installation for intended use.
- The receiver(s) shall have one (1) rubber cover(s) provided.

LOWER SIDE BODY PROTECTION - RUB RAIL

Rub rails shall be provided below the compartment door openings on both the streetside and curbside.

The rub rails shall be fabricated from ABS plastic, measuring approximately 2-3/4" high x 1-3/8" thick. The rub rail shall be bolted to the body using stainless steel bolts and 1-1/2" diameter x 5/8" thick rubber mount isolators to prevent damage to the body.

The ABS plastic material shall be black in color.

UPPER SIDE BODY PROTECTION - RUB RAIL

Rub rails shall be provided on upper body sides on both the streetside and curbside.

The rub rails shall be fabricated from ABS plastic, measuring approximately 2-3/4" high x 1-3/8" thick. The rub rail shall be bolted to the body using stainless steel bolts and 1-1/2" diameter x 5/8" thick rubber mount isolators to prevent damage to the body.

The ABS plastic material shall be black in color.

WALK-IN INTERIOR FINISH DETAILS

DESK, CABINET, CONSOLE FINISH

All specified interior desks, cabinets, overhead cabinets, or consoles shall be fabricated from formed 1/8" 3003 H14 alloy smooth aluminum. After fabrication is completed they shall be painted with a hammer tone powder coat paint finish for a hard durable surface. Paint color shall be gray.

The use of wood materials or laminated surfaces in the construction of desks, cabinets, overhead cabinets, or consoles will not be allowed. There will be No Exceptions allowed on specified ruggedized finish.

CAB/BODY WALK-THROUGH CONNECTION

The front center of the rescue body shall be interconnected with the rear crew area of custom cab through a weather tight walk-through opening. The opening shall be designed to allow the custom cab to tilt forward without disconnecting an attached type seal between the cab and body. The opening shall be approximately 24" wide x 70" high (sized to match the cutout in the rear wall of the cab).

The front of the body shall be cut out to match the cab opening. Additional reinforcements with metal angle or tubing shall be provided to back of cab or front of body, if necessary so that the walk-through opening weakens neither the cab nor body integrity.

The connection shall be weather resistant, yet provide the cab and body to move independent of each other. A flexible 3" rubber weather strip shall be attached to a stainless steel sheet metal frame around the

perimeter of the opening in the back wall of the cab. A drip rail shall be provided on front of body above the opening to channel water to both sides of opening. Stainless steel scuff panels shall be provided on back of cab where the rubber seal on body comes in contact with cab.

A formed metal frame shall be bolted to the front of the body. The body-mounted frame shall be provided where the rubber seal comes into contact with the body. The framework shall be painted to match the body color.

The base of the opening shall be covered with a 3/16" aluminum tread plate full width panel, which will overlap from the cab to body so that the rubber seal can not be damaged.

Full width padded foam cushion head bumpers shall be provided on both sides of opening. Head bumpers shall be covered with matching interior vinyl and bolted to each side of walk-through.

CUT OUT IN REAR CAB WALL

The rear wall of the custom cab shall be cut out 24" wide for walk-thru application. The height of the cutout shall be determined by the cab structure in the rear wall and the roof. The opening shall be completed by the custom cab/chassis manufacturer to assure proper cab structural integrity and completed final interior finish.

INTERIOR SPECIFICATIONS

INTERIOR INSULATION

Following the sheet metal fabrication the roof area, upper exterior walls and the entry door of the apparatus body shall be insulated with Dow Thermax, or equal 1-1/2" glass-fiber reinforced polyisocyanurate foam core laminated between 1.0 mil smooth, reflective aluminum foil facers on both sides, with an R9.8 value. The reinforcement, along with chemical modifications, contributes to fire resistance and dimensional stability. This insulation shall be the type that will not absorb moisture, move once in place or deteriorate. Mat type fiberglass or spray in foam insulation is not acceptable.

INTERIOR FINISH

The interior of the apparatus body shall have a fully maintenance free and durable finish. The interior finish shall be installed on the ceiling, front wall, and interior side walls from top of exterior compartments to ceiling height.

The interior panels shall be installed with sheet metal screws with gray plastic plugs covering the screws. The seams between FRP panels, interior corners, and exterior corners shall be trimmed with gray plastic molding.

The interior finish shall be pearl gray pebble grain FRP.

INTERIOR WALKWAY SIDE WALLS

-

Walkway side walls from floor level to top of exterior compartments shall be brushed stainless steel panels.

INTERIOR WALKWAY FLOOR

The NFPA compliant 3/16" aluminum tread plate walkway floor shall be installed above the barrier, with a 2" high vertical break on each side of the floor panel to form a watertight splash and kickboard along the walkway sides.

The walkway floor area continuously welded at all cross seams to provide a watertight finish, so that a water hose may be used to flush-out walkway area.

INTERIOR SUB-FLOOR

Above the body sub frame walk in areas shall be an isolation sheet to prevent outside elements from permeating the acoustic and thermal barrier. The isolation sheet shall be fabricated from the same type of material as is used in the subframe, and flanged on sides with a 1" high vertical break.

Plascore PP-30, 3/4" thick or similar material shall be placed between the isolation sheet and finished floor for its structural, acoustic and thermal values.

STREETSIDE INTERIOR AREA (IS1)

- The 12 volt electrical distribution panel shall be located in this compartment.

- There shall be one (1) cabinet(s) provided on interior above the interior deck surface formed by exterior compartment ceilings. Cabinet(s) shall be framed in from the top of the interior deck surface to the ceiling of the walk-in area. Each cabinet shall be approximately (insert actual dimensions).
- Cabinet(s) shall be provided with vertically mounted shallow aluminum Shelf-Trac for specified component installation.
- One (1) OnScene Night Axe white LED, full height compartment light, vertically mounted.
- Cargo netting of 1" - 2" nylon webbing shall be provided over cabinet opening with automotive seatbelt style latches.
- There shall be one (1) vertically adjustable shelf in each of the above cabinets. It shall have a 1.25" lip to contain items while minimizing space used.

INTERIOR BENCH SEAT

The interior body walkway shall be provided with a squad bench seat centered along the streetside wall. The bench seat base shall be fabricated of 1/8" aluminum tread plate to form a under seat storage compartment. A hinged door with single point "D"-ring handle and latch shall be provided at the rear of the seat compartment.

The seat shall be fabricated of 3/4" exterior grade plywood with 3" thick foam and Duraware heavy duty fabric covering. The seat backrest shall be approximately 12" high x 2" thick and constructed the same as the seat.

Label: Not A Riding Position

STREETSIDE INTERIOR AREA (IS2)

- The interior deck area over the top of the exterior side compartments shall be un-painted smooth aluminum.
- There shall be one (1) 120 VAC outlet(s) located in the walk-in area of the body. 120 volt power to be in same area as the 12 volt panel on top of counter.

- The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
 - There shall be one (1) approximate 2' long 120 VAC outlet strip(s) with straight blade household type outlets provided.

- Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

CURBSIDE INTERIOR AREA (IC1)

- One (1) 120/240 VAC load center.

- There shall be one (1) cabinet(s) provided on interior above the interior deck surface formed by exterior compartment ceilings. Cabinet(s) shall be framed in from the top of the interior deck surface to the ceiling of the walk-in area. Each cabinet shall be approximately 26" wide.

- Cabinet(s) shall be provided with vertically mounted shallow aluminum Shelf-Trac for specified component installation.

- One (1) OnScene Night Axe white LED, full height compartment light, vertically mounted.

- Cargo netting of 1" - 2" nylon webbing shall be provided over cabinet opening with automotive seatbelt style latches.

- There shall be two (2) vertically adjustable shelves in each of the above cabinets.

CURBSIDE INTERIOR AREA (IC2)

- The interior deck area over the top of the exterior side compartments shall be un-painted smooth aluminum.

There shall be one (1) 120 VAC outlet(s) located in the walk-in area of the body. 120 volt power to be in same area as the 120 volt panel top of counter.

- The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).

- There shall be one (1) approximate 2' long 120 VAC outlet strip(s) with straight blade household type outlets provided.
- Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

CURBSIDE INTERIOR AREA (IC3)

- There shall be one (1) full height cabinet(s) provided on interior. Cabinet(s) shall be constructed of 1/8" smooth finish aluminum, and painted with a hammer tone powder coat paint finish for a hard durable surface. Paint color shall be gray. Each cabinet shall be approximately (insert actual dimensions) x 75" high x 24" deep.
- Cabinet(s) shall be provided with vertically mounted shallow aluminum Shelf-Trac for specified component installation.
- Cargo netting of 1" - 2" nylon webbing shall be provided over cabinet opening with automotive seatbelt style latches.
- There shall be one (1) vertically adjustable shelf in each of the above cabinets. It shall have a 1.25" lip to contain items while minimizing space used.
- There shall be one (1) bar mounted in this compartment used to hang rescue suits.

INTERIOR LED LIGHTS

One (1) OnScene Solution model #70156, 10" x 10" x 7/8", 10-30 VDC, surface mount dual red and white LED light(s) with clear lens shall be provided throughout the vehicle. In addition light(s) will be capable of a five (5) second delay after switching off.

The light(s) shall be switched with high/low intensity setting at the entry door(s). An Innovative Controls black back-lit switch panel shall be provided to control specified lighting or other control switching.

LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC

General

Any low voltage electrical systems or warning devices installed on the fire apparatus shall be appropriate for the mounting location and intended electrical load.

Where wire passes through sheet metal, grommets shall be used to protect wire and wire looms. Electrical connections shall be with double crimp water-tight heat shrink connectors.

All 12 VDC wiring running from front to back of vehicle body shall be run in full length electrical wiring raceway down each side of body.

Wiring

All electrical circuit feeder wiring supplied and installed by the fire apparatus manufacturer shall meet the requirements of NFPA Chapter 13.

The circuit feeder wire shall be stranded copper or copper alloy conductors of a gauge rated to carry 125% of the maximum current for which the circuit is protected. Voltage drops in all wiring from the power source to the using device shall not exceed 10%. The use of star washers for circuit ground connections shall not be permitted.

All circuits shall otherwise be wired in conformance with SAE J1292, *Automobile, Truck, Truck-Tractor, Trailer, and Motor Coach Wiring*.

Wiring and Wire Harness Construction

All insulated wire and cable shall conform to SAE J1127, *Low Voltage Battery Cable*, or SAE J1128, *Low Voltage Primary Cable*, type SXL, GXL, or TXL.

All conductors shall be constructed in accordance with SAE J1127 or SAE J1128, except where good engineering practice dictates special strand construction. Conductor materials and stranding, other than copper, shall be permitted if all applicable requirements for physical, electrical, and environmental conditions are met as dictated by the end application. Physical and dimensional values of conductor insulation shall be in conformance with the requirements of SAE J1127 or SAE J1128, except where good engineering practice dictates special conductor insulation. The overall covering of conductors shall be moisture-resistant loom or braid that has a minimum continuous rating of 194°F (90°C) except where good engineering practice dictates special consideration for loom installations exposed to higher temperatures. The overall covering of jacketed cables shall be moisture resistant and have a minimum continuous

temperature rating of 194°F (90°C), except where good engineering practice dictates special consideration for cable installations exposed to higher temperatures.

All wiring connections and terminations shall use a method that provides a positive mechanical and electrical connection. The wiring connections and terminations shall be installed in accordance with the device manufacturer's instructions. All ungrounded electrical terminals shall have protective covers or be in enclosures. Wire nut, insulation displacement, and insulation piercing connections shall not be used.

Wiring shall be restrained to prevent damage caused by chafing or ice buildup and protected against heat, liquid contaminants, or other environmental factors.

Wiring shall be uniquely identified at least every 2 ft (0.6 m) by color coding or permanent marking with a circuit function code. The identification shall reference a wiring diagram.

Circuits shall be provided with properly rated low voltage over-current protective devices. Such devices shall be readily accessible and protected against heat in excess of the over-current device's design range, mechanical damage, and water spray. Circuit protection shall be accomplished by utilizing fuses, circuit breakers, fusible links, or solid state equivalent devices.

If a mechanical-type device is used, it shall conform to one of the following SAE standards:

- 1) SAE J156, *Fusible Links*
- 2) SAE J553, *Circuit Breakers*
- 3) SAE J554, *Electric Fuses (Cartridge Type)*
- 4) SAE J1888, *High Current Time Lag Electric Fuses*
- 5) SAE J2077, *Miniature Blade Type Electrical Fuses*

Switches, relays, terminals, and connectors shall have a direct current (dc) rating of 125% of maximum current for which the circuit is protected.

Power Supply

A 12 V or greater electrical alternator shall be provided. The alternator shall have a minimum output at idle to meet the minimum continuous electrical load of the vehicle, at 200°F (93°C) ambient temperature within the engine compartment, and shall be provided with full automatic regulation.

Minimum Continuous Electrical Load

The minimum continuous electrical load shall consist of the total amperage required to simultaneously operate the following in a stationary mode during emergency operations:

- 1) The propulsion engine and transmission

- 2) All legally required clearance and marker lights, headlights, and other electrical devices except windshield wipers and four-way hazard flashers
- 3) The radio(s) at a duty cycle of 10 percent transmit and 90% receive (for calculation and testing purposes, a default value of 5 A continuous)
- 4) The lighting necessary to produce 2 fc (20 lx) of illumination on all walking surfaces on the apparatus and on the ground at all egress points onto and off the apparatus, 5 fc (50 lx) of illumination on all control and instrument panels, and 50 percent of the total compartment lighting loads
- 5) The minimum optical warning system, where the apparatus is blocking the right-of way
- 6) The continuous electrical current required to simultaneously operate any fire pumps, aerial devices, and hydraulic pumps
- 7) Other warning devices and electrical loads defined by the purchaser as critical to the mission of the apparatus

If the apparatus is equipped to tow a trailer, an additional 45 A shall be added to the minimum continuous electrical load to provide electrical power for the federally required clearance and marker lighting and the optical warning devices mounted on the trailer.

The condition of the low voltage electrical system shall be monitored by a warning system that provides both an audible and a visual signal to persons on, in, or near the apparatus of an impending electrical system failure caused by the excessive discharge of the battery set.

The charge status of the battery shall be determined either by direct measurement of the battery charge or indirectly by monitoring the electrical system voltage.

If electrical system voltage is monitored, the alarm shall sound if the system voltage at the battery or at the master load disconnect switch drops below 11.8 V for 12 V nominal systems, 23.6 V for 24 V nominal systems, or 35.4 V for 42 V nominal systems for more than 120 seconds.

A voltmeter shall be mounted on the driver's instrument panel to allow direct observation of the system voltage.

Electromagnetic Interference

Electromagnetic interference suppression shall be provided, as required, to satisfy the radiation limits specified in SAE J551/1, *Performance Levels and Methods of Measurement of Electromagnetic Compatibility of Vehicles, Boats (up to 15 m), and Machines (16.6 Hz to 18 GHz)*.

Wiring Diagram

A complete electrical wiring schematic of actual system shall be provided with finished apparatus. Similar or generic type electrical schematics shall NOT BE ACCEPTABLE.

Low Voltage Electrical System Performance Test

A low voltage electrical system test certification shall be provided with delivered apparatus.

12 VOLT DIAGNOSTIC RELAY CONTROL CENTER

The 12 volt power distribution shall be conveniently located with easy access for service. All relays and circuit breakers shall be plug-in type allowing for removal for repairs without necessitating soldering or tools. The sockets mounts for both the relays and circuit breakers shall be of a design that permits the use of standard automotive type components.

The 12 volt distribution panel shall utilize printed circuit boards mounted in high strength enclosure. Each printed circuit board shall be provided with twelve (12) heavy duty independent switching relays. Each relay shall have the ability to be configured either normally open or normally closed and be protected by a 20 amp automatic reset breaker. Each circuit will be provided with a LED for visual diagnostic.

Power distribution panel shall be located in apparatus body within a protected enclosure with removable or hinged cover.

ROCKER SWITCH PANEL

The 12 volt control switch panel shall be supplied and installed by the cab/chassis manufacturer.

ELECTRICAL SYSTEM MANAGER

The chassis shall contain an electrical system manager for:

- Monitoring chassis battery voltage
- Shedding pre-determined electrical circuits
- Sequencing pre-determined electrical circuits
- Automatically controlling chassis engine fast-idle
- Monitor master switch and parking brake applications
- Automatically control warning light modes ("Calling-For" and "Blocking Right of Way")
- Provide low voltage alarm
- Programmable control circuits
- Remote system status indicator panel

System manager shall perform all electrical functions required by current NFPA 1901 Standards.

The electrical system manager shall be supplied and installed by the cab/chassis manufacturer.

BATTERY SYSTEM

The battery connectors shall be heavy duty type with cables terminating in heat shrink loom. Heavy duty battery cables shall provide maximum power to the electrical system. Where required, the cables shall be shielded from exhaust tubing and the muffler. Large rubber grommets shall be provided where cables enter the battery compartment.

Batteries shall be of the high-cycle type. With the engine off, the battery system shall be able to provide the minimum continuous electrical load for 10 minutes without discharging more than 50 percent of the reserve capacity and then to restart the engine. The battery system cold cranking amps (CCA) rating shall meet or exceed the minimum CCA recommendations of the engine manufacturer. The batteries shall be mounted to prevent movement during fire apparatus operation and shall be protected against accumulations of road spray, snow, and road debris. The batteries shall be readily accessible for examination, testing, and maintenance.

A means shall be provided for jump-starting the engine if the batteries are not accessible without lifting the cab of a tilt-cab apparatus.

Where an enclosed battery compartment is provided, it shall be ventilated to the exterior to prevent the buildup of heat and explosive fumes. The batteries shall be protected against vibration and temperatures that exceed the battery manufacturer's recommendation.

An onboard battery conditioner or charger or a polarized inlet shall be provided for charging all batteries. Where an onboard conditioner or charger is supplied, the associated line voltage electrical power system shall be installed in accordance with Chapter 22.

One of the following master disconnect switches shall be provided:

- 1) A master body disconnect switch that disconnects all electrical loads not provided by the chassis manufacturer
- 2) A master load disconnect switch that disconnects all electrical loads on the apparatus except the starter

Electronic control systems and similar devices shall be permitted to be otherwise connected if so specified by their manufacturer.

The alternator shall be wired directly to the batteries through the ammeter shunt(s), if one is provided, and not through the master load disconnect switch.

A green "battery disconnect on" indicator light that is visible from the driver's position shall be provided.

Rechargeable hand lights, radios, and other similar devices shall be permitted to be connected to the electrical system ahead of the master disconnect switch.

A sequential switching device shall be permitted to energize the optical warning devices and other high current devices required in minimum continuous electrical load, provided the switching device shall first energize the electrical devices required in minimum continuous electrical load within 5 seconds.

BATTERY SWITCH

One (1) "battery disconnect on" switch in cab located within easy reach of Driver with green indicator light that is visible from the driver's position shall be provided. The switch and indicator light shall be supplied and installed by the cab/chassis manufacturer.

BATTERY SOLENOID

Battery switch shall consist of a minimum 200 ampere, constant duty solenoid to feed from positive side of battery.

REAR SCENE LIGHTS SWITCHING

There shall be a switch on streetside rear of body to activate the rear scene lights and any specified rear step lighting. The switch shall be a momentary style and connected to a bi-stable relay, allowing multiple switching locations. The scene lights shall automatically shut-off when the parking brake is disengaged.

CAB HAZARD WARNING LIGHT

A red flashing or rotating light, located in the driving compartment. The light shall be furnished by the cab/chassis manufacturer. The light shall be illuminated automatically whenever the vehicles parking brake is not fully engaged and any of the following conditions exist:

- Any passenger or equipment compartment door is not closed.
- Any ladder or equipment rack is not in the stowed position.
- Stabilizer system is not in its stowed position.

- Powered light tower is not stowed.
- Any other device permanently attached to the apparatus is open, extended, or deployed in a manner that is likely to cause damage to the apparatus if the apparatus is moved.

Compartments and equipment meeting all of the following conditions shall be permitted to be exempt from being wired to the hazard light:

- The volume is less than or equal to 4 ft3 (0.1 m3).
- The compartment has an opening less than or equal to 144 in.2 (92,900 mm2).
- The open door does not extend sideways beyond the mirrors or up above the top of the fire apparatus.
- All equipment in the compartment is restrained so that nothing can fall out if the door is open while the apparatus is moving.
- Manually raised pole lights with an extension of less than 5 ft (1.5 m).

The hazard light shall be labeled "DO NOT MOVE APPARATUS WHEN FLASHING".

BRIGADE 360 CAMERA SYSTEM

The completed unit shall be equipped with the Brigade Backeye® 360 system. Backeye® 360 is an intelligent camera monitor system designed to assist low-speed maneuvering by providing the driver with a complete surround view of the vehicle in real time.

Brigade 360° technologies work with four ultra wide angle cameras that each covers one full side of the vehicle with a viewing angle of over 180°. High mounted on the front, rear and sides, the calibrated cameras capture all of the surrounding area including the blind spots of the vehicle or machine.

The four live images are simultaneously sent to an electronic control unit (ECU) model BN-360-200 where they are instantly processed, combined, blended and stitched. The distortion from the wide-angle camera lens is also corrected before delivering a clear, single, smooth, real-time image onto the driver's monitor mounted in cab easily visible to driver.

The following views shall be provided;

- Portrait Mode can be split to display 360° image and trigger single camera views as well as displaying full screen 360° views.
- Front/Rear Focus – provides a close up of the front/rear of the vehicle. Ideal for parking and slow maneuvers.

- Left Hand & Right-Hand Lane Change – 360° image shifts to the left/right when triggered to give the driver extra emphasis to right/left hand lanes.

System shall be calibrated and fully functional upon delivery.

VIDEO MONITOR

One (1) Brigade model VBV-770M 7" LCD, 12 VDC in cab video monitor(s) shall be provided and installed easily visible to driver with viewing dimensions of 7.7" x 4.6" x 1" with an 800 x 480 resolution.

Monitors shall include the following features:

6.5" Double-DIN in-dash model

- · In-built image viewing options, including single/split/triple/quad and picture-in-picture
- · Waterproof
- · Audio
- · On-screen distance markers
- · Anti-tamper buttons
- · R46 approved
- · Certified to ISO 13766:2006
- · Auto switching PAL/NTSC
- · Compatible with Brigade's MDR

BRIGADE MOBILE BACKSCAN SYSTEM

-

A Brigade Backscan Reversing Sensor System and a On Screen Display Module will be provided and installed on completed unit. System includes:

UDS: Backscan Reversing Sensor System,12-24v- MDL#BS-4000W

On Screen Display Module- MDL#UDS-OSD21

INTERIOR LED LIGHTS

Two (2) OnScene Solution model #70156, 10" x 10" x 7/8", 10-30 VDC, surface mount dual red and white LED light(s) with clear lens shall be provided throughout the vehicle. In addition light(s) will be capable of a five (5) second delay after switching off.

The light(s) shall be switched with high/low intensity setting at the entry door(s). An Innovative Controls black back-lit switch panel shall be provided to control specified lighting or other control switching.

TAIL LIGHTS

Rear body tail lights shall be vertically mounted and located per Federal Motor Vehicle Safety Standards, FMVSS and Canadian Motor Vehicle Safety Standards CMVSS. The following lights shall be furnished;

- Two (2) Whelen M6 Series M6T amber LED turn lights
- Two (2) Whelen M6 Series M6BTT red LED stop/tail lights
- Two (2) Whelen M6 Series M6BUW clear LED back-up lights with clear lens

Each light shall have a chrome flange.

MIDSHIP MARKER/TURN SIGNAL

Two (2) Whelen model TOA00MAR 2" round amber LED midship body clearance marker/turn signal lights shall be provided and installed, one (1) light on each side of the body, in forward wheel well of rear axle. Midship marker/turn lights shall be wired to the headlight circuit of the chassis.

MARKER LIGHTS

The body shall be equipped with all necessary side and rear clearance lights and reflectors in accordance with Federal Motor Vehicle Safety Standards (FMVSS) and Canadian Motor Vehicle Safety Standards (CMVSS). Clearance lights shall be Truck-Lite model 18 series, 3 diode LED, reflectorized type to reduce the need for maintenance and lower the amp draw. Clearance lights on body shall be connected to the clearance light circuit of the chassis.

CAB STEP LIGHTS / GROUND LIGHTS

The step lights and/or ground lights shall be supplied and installed by the cab/chassis manufacturer. Light(s) shall be capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting designed to provide illumination on areas under the driver and crew riding area exits shall be switchable but activated automatically when the exit doors are opened.

LICENSE PLATE MOUNTING BRACKET

A license plate mounting bracket shall not be provided on completed unit.

SIDE SCENE LIGHTS

There shall be four (4) Fire Research Spectra model SPA260-Q15 surface mount LED light(s) provided on the upper body. Light quantity shall be divided equally per side. The light(s) shall be mounted with four (4) screws to a flat surface. It shall be no more than 6" high by 14 1/2" wide and have a profile of less than 1 3/4" beyond the mounting surface. Wiring shall extend from a weather proof strain relief at the rear of the lamphead.

The lamphead shall have sixty (60) ultra-bright white LEDs, 56 for flood lighting and 4 to provide a spot light beam pattern. It shall operate at 12/24 volts DC, draw 13/6.5 amps, and generate 15,000 lumens of light. The lamphead shall have a unique lens that directs flood lighting onto the work area and focuses the spot light beam into the distance. The lamphead shall be powder coated.

The Lights shall be controlled at the Switch Panel in Cab.

REAR SCENE LIGHT

There shall be one (1) Fire Research Spectra model SPA260-Q15 surface mount LED light installed, on streetside of upper rear body. The light(s) shall be mounted with four (4) screws to a flat surface. It shall be no more than 6" high by 14 1/2" wide and have a profile of less than 1 3/4" beyond the mounting surface. Wiring shall extend from the electronics box at the rear of the lamphead.

The lamphead shall have sixty (60) ultra-bright white LEDs, 56 for flood lighting and 4 to provide a spot light beam pattern. It shall operate at 12 volts DC, draw 13 amps, and generate 15,000 lumens of light. The lamphead shall have a unique lens that directs flood lighting onto the work area and focuses the spot light beam into the distance. The lamphead shall be powder coated.

The above scene lights shall light to a level of at least 3 fc (30 lx), measured at 25 equally spaced points on a 2.5 ft (750 mm) grid within a 10 ft x 10 ft (3 m x 3m) square to the rear of vehicle.

The Lights shall be controlled at the Switch Panel in Cab.

The rear scene lights shall also be activated when the apparatus is in reverse.

TRAFFIC ADVISOR LIGHTS

A traffic advisor system shall be provided on rear of vehicle using; six (6) Whelen Wide-angle ION series amber Super-LED lights with clear lens, and 25 Scan-Lock™ flash patterns. Lights shall be individually mounted with chrome bezels and evenly distributed to rear, if split by a hose bed, or walkway.

The lights shall be controlled by a Whelen TACTL5 control located in cab dash or center console area and provide; Left Arrow, Right Arrow, Center Out, and Wig-Wag patterns. The LED display on the control head shall replicate the Traffic Advisor's directional sequence. The TACTL5 shall have a rear panel dip switch for the ability to set eight additional Scan-Lock™ flash patterns. The wig-wag light pattern shall be activated with the E-Master and can be switched to the other patterns at any time through the control panel.

WARNING LIGHT PACKAGE

Each apparatus shall have a system of optical warning devices that meets or exceeds the requirements of this section.

The optical warning system shall consist of an upper and a lower warning level. The requirements for each level shall be met by the warning devices in that particular level without consideration of the warning devices in the other level.

For the purposes of defining and measuring the required optical performance, the upper and lower warning levels shall be divided into four (4) warning zones. The four zones shall be determined by lines drawn through the geometric center of the apparatus at 45 degrees to a line drawn lengthwise through the geometric center of the apparatus. The four (4) zones shall be designated A, B, C, and D in a clockwise direction, with zone A to the front of the apparatus.

Each optical warning device shall be installed on the apparatus and connected to the apparatus's electrical system in accordance with the requirements of this standard and the requirements of the manufacturer of the device.

A master optical warning system switch that energizes all the optical warning devices shall be provided.

The optical warning system on the fire apparatus shall be capable of two (2) separate signaling modes during emergency operations. One (1) mode shall signal to drivers and pedestrians that the apparatus is responding to an emergency and is calling for the right-of-way. One (1) mode shall signal that the apparatus is stopped and is blocking the right-of-way. The use of some or all of the same warning lights shall be permitted for both modes provided the other requirements of this chapter are met.

A switching system shall be provided that senses the position of the parking brake or the park position of an automatic transmission. When the master optical warning system switch is closed and the parking brake is released or the automatic transmission is not in park, the warning devices signaling the call for the right-of-way shall be energized. When the master optical warning system switch is closed and the parking brake is on or the automatic transmission is in park, the warning devices signaling the blockage of the right-of-way shall be energized. The system shall be permitted to have a method of modifying the two (2) signaling modes.

The optical warning devices shall be constructed or arranged so as to avoid the projection of light, either directly or through mirrors, into any driving or crew compartment(s). The front optical warning devices shall be placed so as to maintain the maximum possible separation from the headlights.

Steadily burning, non flashing optical sources shall be permitted to be used.

UPPER LEVEL OPTICAL WARNING DEVICES

The upper-level optical warning devices shall be mounted as high and as close to the corner points of the apparatus as is practical to define the clearance lines of the apparatus. The upper-level optical warning devices shall not be mounted above the maximum height, specified by the device manufacturer.

ZONE A - FRONT WARNING LIGHTS

The light bar shall be supplied and installed on the cab.

The lightbar(s) shall be separately controlled at switch panel in the cab.

ZONES B AND D - SIDE WARNING LIGHTS

UPPER REAR CORNER WARNING LIGHTS

There shall be two (2) Whelen M9 SurfaceMax, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities. Component shall be covered by a five year Whelen factory warranty.

Each Light shall have:

- Red LEDs
- Red Lens

Each light shall have a chrome flange.

- Flash Pattern shall be (factory default) Action Scan.

The Lights shall be controlled at the Switch Panel in Cab.

UPPER FORWARD CORNER WARNING LIGHTS

There shall be two (2) Whelen M9 SurfaceMax, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities. Component shall be covered by a five year Whelen factory warranty.

Each Light shall have:

- Red LEDs
- Red Lens

Each light shall have a chrome flange.

- Flash Pattern shall be (factory default) Action Scan.

The Lights shall be controlled at the Switch Panel in Cab.

ZONE C - REAR WARNING LIGHTS

There shall be two (2) Whelen M9 SurfaceMax, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities. Component shall be covered by a five year Whelen factory warranty.

Each Light shall have:

- Red LEDs
- Red Lens

Each light shall have a chrome flange.

- Flash Pattern shall be (factory default) Action Scan.

The Lights shall be controlled at the Switch Panel in Cab.

There shall be two (2) Whelen 4500 28" LED Mini Light Bars mounted on the rear of the apparatus, one (1) each side. The color for each light bar from left to right shall be Red/Amber/Red - all LED.

The Lights shall be controlled at the Switch Panel in Cab.

LOWER LEVEL OPTICAL WARNING DEVICES

To define the clearance lines of the apparatus, the optical center of the lower-level optical warning devices in the front of the vehicle shall be mounted on or forward of the front axle centerline and as close to the front corner points of the apparatus as is practical.

The optical center of the lower-level optical warning devices at the rear of the vehicle shall be mounted on or behind the rear axle centerline and as close to the rear corners of the apparatus as is practical. The optical center of any lower-level device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground for large apparatus, and 18 in. and 48 in. (460 mm and 1600 mm) above level ground.

A midship optical warning device shall be mounted right and the left sides of the apparatus if the distance between the front and rear lower-level optical devices exceeds 25 ft (7.6 m) at the optical center. Additional midship optical warning devices shall be required, where necessary, to maintain a horizontal distance between the centers of adjacent lower-level optical warning devices of 25 ft (7.6 m) or less. The optical center of any midship mounted optical warning device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground.

ZONE A - FRONT WARNING LIGHTS

The warning lights shall be supplied and installed on the cab. They shall be Whelen lights to complete an NFPA compliant lower level warning light system.

- Flash Pattern shall be as supplied by the Cab/Chassis Mfg.

The Lights shall be controlled at the Switch Panel in Cab.

ZONES B AND D - CAB INTERSECTOR LIGHT (CAB FRONT CORNERS)

The warning lights shall be supplied and installed by the cab/chassis manufacturer. They shall be Whelen lights to complete an NFPA compliant lower level warning light system.

- Flash Pattern shall be as supplied by the Cab/Chassis Mfg.

The Lights shall be controlled at the Switch Panel in Cab.

ZONES B AND D - BODY LIGHT (BODY WHEELWELL AREA)

There shall be two (2) Whelen 500 series (5" x 2") TIR6 Super-LED lights (50R03ZRR) provided, one (1) each side. Each light shall have a red lens and chrome finished flange.

The Lights shall be controlled at the Switch Panel in Cab.

ZONES B AND D - BODY INTERSECTOR LIGHT (BODY REAR CORNERS)

There shall be two (2) Whelen M6 SurfaceMax, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities. Component shall be covered by a five year Whelen factory warranty.

Each Light shall have:

- Red LEDs
- Red Lens

Each light shall have a chrome flange.

- Flash Pattern shall be (factory default) Action Scan.

The Lights shall be controlled at the Switch Panel in Cab.

ZONE C - REAR WARNING LIGHTS (LOWER REAR CORNERS)

There shall be two (2) Whelen M6 SurfaceMax, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities. Component shall be covered by a five year Whelen factory warranty.

Each Light shall have:

- Red LEDs
- Red Lens

Each light shall have a chrome flange.

- Flash Pattern shall be (factory default) Action Scan.

The Lights shall be controlled at the Switch Panel in Cab.

LINE VOLTAGE ELECTRICAL SYSTEM

ONAN PTO GENERATOR

The vehicle shall be equipped with an Onan Protec PTO generator system with a capacity of 25,000 watts at 120/240 VAC, 208/104 amps, single phase. Current frequency shall be stable at 60 hertz.

The transmission's PTO port and PTO, or the split shaft PTO, and all associated drive shaft components shall be rated to support the continuous duty torque requirements of the generator's continuous duty rating as stated on the power source nameplate.

Where the generator is driven by the chassis engine and transmission through a split shaft PTO, the driving compartment speedometer shall register when the generator drive system is engaged.

Where the generator is driven by the chassis engine and transmission through a split shaft PTO and a chassis transmission retarder is furnished, it shall be automatically disengaged for generator operations.

The direct drive generator shall be mounted so that it does not change the ramp break over angle, angle of departure, or angle of approach as defined by other components, and it shall not extend into the ground clearance area.

The direct drive generator shall be mounted away from exhaust and muffler areas or provided with a heat shield to reduce operating temperatures in the generator area.

GENERATOR BONDING

A minimum of four (4) 16" x 2 gauge copper ground straps shall be bolted to body sub-frame and chassis sub-frame for proper bonding of high voltage system. The conductor shall have a minimum amperage rating, as defined in 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*, of 115 percent of the rated amperage on the power source specification label.

GENERATOR ENGAGEMENT

A "Generator Engaged" indicator shall be provided in the driving compartment to indicate that the generator shift has been successfully completed.

An "OK to Operate Generator" indicator shall be provided in the driving compartment to indicate that the generator is engaged (if not always engaged), the transmission is in the proper gear (if required, automatic transmissions only), and the parking brake is engaged (if applicable).

An interlock system shall be provided to prevent advancement of the engine speed in the driving compartment or at any operator's panel unless the parking brake is engaged, and the transmission is in neutral or the output of the transmission is correctly connected to a pump or generator instead of the drive wheels.

WARRANTY PERIOD

Provided such goods are operated and maintained in accordance with Onan's written instructions, Onan warrants that the Protec YDCR series PTO generators shall be free from defects in material and workmanship for a period of five (5) years or one thousand (1,000) hours, whichever comes first, from the date of delivery to the first purchaser.

GENERATOR SPLASH GUARD

A powder coat painted splash cover shall be installed to reduce the amount of road spray on the frame mounted PTO generator. A V-ring seal shall also be installed in the cover to provide additional protection against contaminants reaching the generator front seals.

GENERATOR CONTROL

The generator shall be engaged at the switch panel in the cab.

GENERATOR MOUNTING - ONAN PROTEC

The generator shall be mounted below the chassis frame rails. The generator mounting brackets shall be fabricated using steel plate and/or tubing and powder coat primed and painted black. The generator mounting shall be bolted to the side of the chassis frame rail and removable so that the generator can be lowered from under apparatus for service, if necessary. The generator case shall not extend below the bottom edge of the apparatus body.

MANUALS AND SCHEMATICS

Two (2) complete manuals on parts list, maintenance, wiring schematics, hydraulic schematics, circuit boards, voltage regulator board and other components shall be provided on delivery.

POWER-TAKE-OFF GENERATOR DRIVE

There shall be a "Hot Shift" power-take-off (PTO) installed on the transmission PTO opening of the chassis. The "Hot Shift" PTO is provided to allow the engagement of the PTO at higher engine RPM speeds. The PTO output shall be connected to the generator through hollow tube type driveline with heavy duty universals.

The engagement of the PTO shall be in the chassis cab with a rocker switch and red pilot light to note engagement of the PTO or via the V-Mux screen if so equipped.

The power supply to the PTO engagement control shall be wired to the parking brake and a neutral position transmission switch to prevent engagement unless the vehicle is stopped and transmission has been placed in neutral.

The installation of the engine, transmission, driven accessories (power takeoffs (PTO), etc.) shall meet the engine and transmission manufacturers' installation recommendations for the service intended.

Model part number shall be Chelsea 280 series.

ENGINE SPEED CONTROL

An engine speed auxiliary control device (high idle switch or throttle) shall be installed to maintain a stable cycle output from generator when the apparatus is parked.

An interlock shall prevent the operation of the engine speed auxiliary control device unless the parking brake is engaged and the transmission is in neutral or park, or the parking brake is engaged and the engine is disengaged from the drive wheels.

The engine shall be prevented from regulating its own engine speed during times when engine rpm control is critical for consistent apparatus functions such as generator, water pump, or aerial operation.

LOADCENTER

-

The loadcenter shall be an Eaton BR Series specifically designed for protection and distribution of AC line voltage such as lighting and small motor branch circuits. The loadcenter enclosure is made of 16 gauge galvanized sheet steel with a galvanized coating provided for corrosion protection. All trims used on BR

loadcenters are chromate sealed and finished with an electro-disposition epoxy paint (ANSI-61) which exceeds requirements for outdoor and indoor applications. A combination surface/flush cover with integral door is supplied with indoor loadcenters rated from 100 through 400 amperes. All plug-in loadcenters are CSA listed to file LL98266. CSA Certified to C22.2 No.29, to loadcenter type and CSA listing.

GENERATOR MONITORING PANEL

An Accuvim CL digital meter package shall be provided to properly monitor the generator performance and load demand during operation. The electrical parameters can be viewed on a backlit LCD screen. The 15 screens are accessible via four buttons on the front panel allowing the user to scroll between various screens. The following shall be displayed full-time;

- Generator frequency in hertz
- Line 1 current in amperes
- Line 2 current in amperes
- Generator voltage in volts

In addition, an elapsed generator hours gauge shall be provided near the digital meter.

SHORE POWER INLET - AIR CONDITIONER UNITS

To protect both the generator and external power source from back feed, two (2) 120 volt, 30 ampere, 4PST auxiliary contact with safety interlock relay shall be installed. Relay shall cut-off the connection between the generator supply circuit and device circuits when shore power is connected.

Transfer equipment, including transfer switches, shall operate such that all ungrounded conductors of one power source are disconnected before any ungrounded conductors of the second power source are connected. The neutral conductor shall be switched through the transfer switch. The apparatus shall have a label permanently affixed at the power inlet that indicates the line voltage, and amperage.

SHORE POWER INLET

One (1) Kussmaul 120 VAC, 30 amp Super Auto-Eject shore power inlet(s) shall be provided. The shore power connection shall automatically disengage from vehicle when chassis ignition is engaged.

The protective ground from the shoreline inlet shall be bonded to the vehicle frame.

- The outlet cover shall be blue.

- The shore power plug shall be located near the Driver door area.

Shore power shall be wired to the specified 120 VAC air conditioning unit(s), (maximum of two (2) units).

LINE VOLTAGE ELECTRICAL SYSTEM

GENERAL REQUIREMENTS

Stability

Any fixed line voltage power source producing alternating current (ac) shall produce electric power at 60 Hz, ± 3 Hz when producing power at all levels between no load and full rated power. Any fixed line voltage power source shall produce electric power at the rated voltage ± 10 percent when producing power at all levels between no load and full rated power.

The maximum voltage supplied to portable equipment shall not exceed 275 volts to ground. Higher voltage shall be permitted only when used to operate fixed wired, permanently mounted equipment on the apparatus.

Conformance with National Electrical Code

All components, equipment, and installation procedures shall conform to *NFPA 70, National Electrical Code*, except where superseded by the requirements of this chapter. Where the requirements of this chapter differ from those in *NFPA 70*, the requirements in this chapter shall apply.

Where available, line voltage electrical system equipment and materials included on the apparatus shall be listed and used only in the manner for which they have been listed. All equipment and materials shall be installed in accordance with the manufacturer's instructions.

Location Ratings

Any equipment used in a dry location shall be listed for dry locations. Any equipment used in a wet location shall be listed for wet locations.

Any equipment, except a PTO-driven generator, used in an underbody or under chassis location that is subject to road spray shall be either listed as Type 4 or mounted in an enclosure that is listed as Type 4.

If a PTO-driven generator is located in an underbody or under chassis location, the installation shall include a shield to prevent road spray from splashing directly on the generator.

Grounding

Grounding shall be in accordance with 250.34(A) and 250.34(B) of *NFPA 70*. Ungrounded systems shall not be used.

Only stranded or braided copper conductors shall be used for grounding and bonding.

The grounded current-carrying conductor (neutral) shall be insulated from the equipment-grounding conductors and from the equipment enclosures and other grounded parts.

The neutral conductor shall be colored white or gray in accordance with 200.6, "Means of Identifying Grounded Conductors," of *NFPA 70*.

Any bonding screws, straps, or buses in the distribution panel board or in other system components between the neutral and equipment-grounding conductor shall be removed and discarded.

Bonding

The neutral conductor of the power source shall be bonded to the vehicle frame. The neutral bonding connection shall occur only at the power source. In addition to the bonding required for the low voltage return current, each body and each driving or crew compartment enclosure shall be bonded to the vehicle frame by a copper conductor.

The conductor shall have a minimum ampere rating, as defined in 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*, of 115 percent of the rated ampere on the power source specification label.

A single conductor that is sized to meet the low voltage and line voltage requirements shall be permitted to be used.

Ground Fault Circuit Interrupters

In special service vehicles incorporating a lavatory, sink, toilet, shower, or tub, 120 V, 15 or 20 A receptacles within 6 ft (1.8 m) of these fixtures shall have ground fault circuit interrupter (GFCI) protection. GFCIs integrated into outlets or circuit breakers or as stand-alone devices shall be permitted to be used in situations.

Power Source General Requirements

All power source system mechanical and electrical components shall be sized to support the continuous duty nameplate rating of the power source.

The power source shall be shielded from contamination that would prevent the power source from operating within its design specifications.

Power Source Rating

For power sources of 8 kW or larger, the power source manufacturer shall declare the continuous duty rating that the power source can provide when installed on fire apparatus according to the manufacturer's instructions and run at 120°F (49°C) air intake temperature at 2000 ft (600 m) above sea level.

The rating on the power source specification label shall not exceed the declared rating from the power source manufacturer.

Access shall be provided to permit both routine maintenance and removal of the power source for major servicing. The power source shall be located such that neither it nor its mounting brackets interfere with the routine maintenance of the fire apparatus.

Instrumentation

If the power source is rated at less than 3 kW, a "Power On" indicator shall be provided. If the power source is rated at 3 kW or more but less than 8 kW, a voltmeter shall be provided.

If the power source is rated at 8 kW or more, the following instrumentation shall be provided at an operator's panel:

- 1) Voltmeter
- 2) Current meters for each ungrounded leg
- 3) Frequency (Hz) meter
- 4) Power source hour meter

The instrumentation shall be permanently mounted at an operator's panel. The instruments shall be located in a plane facing the operator. Gauges, switches, or other instruments on this panel shall each have a label to indicate their function.

The instruments and other line voltage equipment and controls shall be protected from mechanical damage and not obstructed by tool mounting or equipment storage.

An instruction plate(s) that provides the operator with the essential power source operating instructions, including the power-up and power-down sequence, shall be permanently attached to the apparatus at any point where such operations can take place.

Operation

Provisions shall be made for placing the generator drive system in operation using controls and switches that are identified and within convenient reach of the operator.

Where the generator is driven by the chassis engine and engine compression brakes or engine exhaust brakes are furnished, they shall be automatically disengaged for generator operations.

Any control device used in the generator system power train between the engine and the generator shall be equipped with a means to prevent unintentional movement of the control device from its set position in the power generation mode.

If there is permanent wiring on the apparatus that is designed to be connected to the power source, a power source specification label that is permanently attached to the apparatus at the operator's control station shall provide the operator with the information required.

The power source, at any load, shall not produce a noise level that exceeds 90 dBA in any driving compartment, crew compartment, or onboard command area with windows and doors closed or at any operator's station on the apparatus.

Power Supply Assembly

The conductors used in the power supply assembly between the output terminals of the power source and the main over current protection device shall not exceed 12 ft (4 m) in length.

All power supply assembly conductors, including neutral and grounding conductors, shall have an equivalent amperage rating and shall be sized to carry not less than 115 percent of the amperage of the nameplate current rating of the power source.

If the power supply assembly connects to the vibrating part of a generator (not a connection on the base), the conductors shall be flexible cord or other fine-stranded conductors enclosed in metallic or nonmetallic liquid tight flexible conduit rated for wet locations and temperatures not less than 194°F (90°C).

Over-current Protection

Manually re-settable over current devices shall be installed to protect the line voltage electrical system components.

Power Source Protection

A main over current protection device shall be provided that is either incorporated in the power source or connected to the power source by a power supply assembly.

The size of the main over current protection device shall not exceed 100 percent of the rated amperage stated on the power source specification label or the rating of the next larger available size over current protection device, where so recommended by the power source manufacturer.

If the main over current protection device is subject to road spray, the unit shall be housed in a Type 4-rated enclosure.

Branch Circuit Over-current Protection

Over current protection devices shall be provided for each individual circuit and shall be sized at not less than 15 amps in accordance with 240.4, "Protection of Conductors," of *NFPA 70*.

Any panel board shall have a main breaker where the panel has six or more individual branch circuits or the power source is rated 8 kW or larger.

Each over current protection device shall be marked with a label to identify the function of the circuit it protects.

Dedicated circuits shall be provided for any large appliance or device (air conditioning units, large motors, etc.) that requires 60 percent or more of the rated capacity of the circuit to which it is connected, and that circuit shall serve no other purpose.

Panelboards

All fixed power sources shall be hardwired to a permanently mounted panel board unless one of the following conditions exists:

- 1) All line voltage power connections are made through receptacles on the power source and the receptacles are protected by integrated over current devices.
- 2) Only one circuit is hardwired to the power source, which is protected by an integrated over current device.

The panel shall be visible and located so that there is unimpeded access to the panel board controls. All panel boards shall be designed for use in their intended location. The panel(s) shall be protected from mechanical damage, tool mounting, and equipment storage.

Where the power source is 120/240 V and 120 V loads are connected, the apparatus manufacturer or line voltage system installer shall consider load balancing to the extent that it is possible.

Wiring Methods

Fixed wiring systems shall be limited to the following:

- 1) Metallic or nonmetallic liquid tight flexible conduit rated at temperatures not less than 194°F (90°C) with stranded copper wire rated for wet locations and temperatures not less than 194°F (90°C)
- 2) Type SOW, SOOW, SEOW, or SEOOW flexible cord rated at 600 V and at temperatures not less than 194°F (90°C)

Electrical cord or conduit shall not be attached to chassis suspension components, water or fuel lines, air or air brake lines, fire pump piping, hydraulic lines, exhaust system components, or low voltage wiring and shall be arranged as follows:

- 1) Separated by a minimum distance of 12 in. (300 mm) from exhaust piping or shielded from such piping
- 2) Separated from fuel lines by a minimum distance of 6 in. (150 mm)

A means shall be provided to allow “flexing” between the driving and crew compartment, the body, and other areas or equipment whose movement would stress the wiring.

Electrical cord or conduit shall be supported within 6 in. (150 mm) of any junction box and at a minimum of every 24 in. (600 mm) of run.

Supports shall be made of nonmetallic materials or of corrosion-resistant or corrosion-protected metal. All supports shall be of a design that does not cut or abrade the conduit or cord and shall be mechanically fastened to the apparatus.

Only fittings and components listed for the type of cord or conduit being installed shall be used.

Splices shall be made only in a listed junction box.

Additional Requirements for Flexible Cord Installations

Where flexible cord is used in any location where it could be damaged, it shall be protected by installation in conduit, enclosures, or guards.

Where flexible cord penetrates a metal surface, rubber or plastic grommets or bushings shall be installed.

Wiring Identification

Each line voltage circuit originating from the main panel board shall be identified.

The wire or circuit identification either shall reference a wiring diagram or wire list or shall indicate the final termination point of the circuit.

Where pre-wiring for future power sources or devices exists, the un-terminated ends shall be marked with a label showing their wire size and intended function.

Wiring System Components

Only stranded copper conductors with an insulation rated for temperatures of at least 194°F (90°C) and wet locations shall be used. Conductors in flexible cord shall be sized in accordance with Table 400.5(A) of *NFPA 70*. Conductors used in conduit shall be sized in accordance with 310.15, “Ampacities for Conductors Rated 0–2000

Volts,” of *NFPA 70*. Aluminum or copper-clad aluminum conductors shall not be used.

All boxes shall conform to and be mounted in accordance with Article 314, “Outlet, Device, Pull, and Junction Boxes; Conduit Bodies; Fittings; and Manholes,” of *NFPA 70*. All boxes shall be accessible using ordinary hand tools. Boxes shall not be permitted behind welded or pop-riveted panels.

The maximum number of conductors permitted in any box shall be in accordance with 314.16, “Number of Conductors in Outlet, Device, and Junction Boxes, and Conduit Bodies,” of *NFPA 70*.

All wiring connections and terminations shall provide a positive mechanical and electrical connection. Connectors shall be installed in accordance with the manufacturer’s instructions. Wire nuts or insulation displacement and insulation piercing connectors shall not be used.

Each switch shall indicate the position of its contact points (i.e., open or closed) and shall be rated for the continuous operation of the load being controlled. All switches shall be marked with a label indicating the function of the switch. Circuit breakers used as switches shall be “switch rated” (SWD) or better. Switches shall simultaneously open all associated line voltage conductors. Switching of the neutral conductor alone shall not be permitted.

Line voltage circuits controlled by low voltage circuits shall be wired through properly rated relays in listed enclosures that control all non-grounded current-carrying conductors.

Receptacles and Inlet Devices

Wet and Dry Locations

All wet location receptacle outlets and inlet devices, including those on hardwired, remote power distribution boxes, shall be of the grounding type, provided with a wet location cover, and installed in accordance with Section 406.8, “Receptacles in Damp or Wet Locations,” of *NFPA 70*.

All receptacles located in a wet location shall be not less than 24 in. (600 mm) from the ground. Receptacles on off road fire apparatus shall be a minimum of 30 in. (750 mm) from the ground. All receptacles located in a dry location shall be of the grounding type and shall be at least 12 in. (300 mm) above the interior floor height. No receptacle shall be installed in a face-up position.

The face of any wet location receptacle shall be installed in a plane from vertical to not more than 45 degrees off vertical.

Receptacle Label

Each receptacle shall be marked with a label indicating the nominal line voltage (120 volts or 240 volts) and the current rating in amps of the circuit. If the receptacle is DC or other than single phase, that information shall also be marked on the label.

All receptacles and electrical inlet devices shall be listed to UL 498, *Standard for Safety Attachment Plugs and Receptacles*, or other recognized performance standards.

Receptacles used for DC voltages shall be rated for DC service.

Wiring Schematics

An "As-Built" Wiring diagrams for line voltage systems shall be provided to include the following information;

- (a) Pictorial representations of circuit logic for all electrical components and wiring
- (b) Circuit identification
- (c) Connector pin identification
- (d) Zone location of electrical components
- (e) Safety interlocks
- (f) Alternator–battery power distribution circuits
- (g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems

EQUIPMENT PAYLOAD WEIGHT ALLOWANCE

In compliance with NFPA 1901 standards, the special service vehicle shall be designed for an equipment loading allowance of 6,000 lbs. of City of Columbus provided equipment based on a 40,001 - 50,000 pound gross vehicle weight rating.

OPERATION AND SERVICE MANUALS

Complete "Operation and Service" manuals shall be supplied with the completed apparatus, one (1) printed copy and one (1) USB flash drive. Service manual instructions shall include service, maintenance and troubleshooting for major and minor components of the truck. The apparatus manufacturer shall supply part numbers for major components (i.e. Engine, Axles, Transmission, Pump, etc.). A table of contents, hydraulic, air brake and overall apparatus wiring schematics shall be included.

A video demonstration DVD on the operation of the truck shall be supplied with the manuals.

Additional operator and maintenance manual(s) shall be provided.

WARRANTIES

The following warranties shall be supplied:

1. The apparatus shall be warranted to be free from mechanical defects in workmanship for a period of one (1) year. The apparatus shall be covered for parts and labor costs associated with repairs for a period one (1) year.
2. Life-time warranty on the frame.
3. Seven (7) year warranty on paint.
4. Ten (10) body structural warranty
5. Ten (10) year cab structural warranty
6. Manufacturers Warranties for all major components.

Detailed warranty documents shall be included for complete coverage on each of these warranties.

FIRE COM HOOKS

There will be sixteen (16) Fire Comm Hooks supplied and in a location determined by the customer. Six (6) will be utilized for headset hangers.

INSTALL

The customer supplied Knox box and TIC will be installed in the cab in a location determined by the customer.

COMMUNICATION PACKAGE

A communications package shall be provided and installed as mutually agreed upon between the Purchaser and the Manufacturer.

The following described will be mounted.

- 1.) One(1) Model LP 800 800MHZ Radio Antenna & Cable
- 2.) One (1) Model APCCWG LTE/Cell/PCS/GPS Antenna
- 3.) One (1) Model SDPAN Havis Docking Station for Panasonic
- 4.) One (1) Magnetic Mic Mount
- 5.) One (1) Firecom Intercom System will be provided(Two (2)Wireless Heads PositionDriver,Officer * Three (3) Hard wired for the crew seats.

EQUIPMENT TO BE SUPPLIED

The following equipment shall be furnished with the completed special service vehicle;

Mounting Brackets

One (1) container of assorted stainless steel nuts, bolts, screws and washers used in the construction of the apparatus shall be provided with the completed apparatus.

Two (2) PAC Toolok model 1003 bracket(s) with black strap shall be provided with the completed vehicle.

Two (2) PAC Handlelok model 1004 bracket(s) with black strap shall be provided with the completed vehicle.

Two (2) PAC Jumbelok model 1070 bracket(s) with black strap shall be provided with the completed vehicle.

Two (2) PAC Tool Hanger kit model K5009 bracket(s) shall be provided with the completed vehicle.

Two (2) PAC 10-12 lb. Sledge Hanger kit model K5010-12 bracket(s) with black strap shall be provided with the completed vehicle.

Two (2) PAC Flat Axe Hanger kit model K5011 bracket(s) with black strap shall be provided with the completed vehicle.

Two (2) PAC Halligan Hanger kit model K5032 bracket(s) with black strap shall be provided with the completed vehicle. an aluminum scuff panel will be provided along side panel.

There shall be two (2) Zico SAC-44-E NFPA approved folding aluminum wheel chocks provided for 44" diameter tires that together will hold the vehicle when loaded to its GVWR or GCWR, on a hard surface with a 20 % grade, with the transmission in neutral, and the parking brake released.

One (1) Hydro Ram will be supplied per rescue unit.

Two (2) 2 1/2" Gallon Water Cans will be provided per rescue unit.

One (1) Quic Mount Bolt Cutter Bracket

One (1) Zico Shovel Bracket

One (1) Zico Shovel Holder

Two (2) Zico Sledge Hammer Bracket

Four (4) Zico Axe Holder
Two (2) Zico Quick Mount Electric Cord Holder
One (1) Quic Bar/Axe Mounting Bracket Set w/Stop
Ten (10) Zico Quic Strap
Ten (10) Zico Footman Strap
Five (5) Zico Low profile mounting brackets
Four (4) Quic Mount Low Profile Mounting bracket
Two (2) Zico Pack Quick mount tool clips
Two (2) Zico Pack quick mount tool slips 1.25"
Twenty (20) Pac Hand lock brackets
Ten (10) Pac Jumbo lock
Two (2) Pac Super Adjustment mount kits
Stihl PKG One (1) Per Rescue Unit
One (1) Stihl MSA220CB16PS 16" AP Platform Chainsaw Promo Kit with 2 AP
One (1) Stihl TSA230PS 9" Cut Off Tool AP Platform Promo Kit W/2A
One (1) Stihl 9IN D X 100 Premium DI
Four (4) Stihl STH - DDH
Each Rescue will be equipped with a charger and four (4) batteries.
Stihl PKG Inventory
There will be sixth set of the Stihl items listed above shipped loose of the package described above.