

GENERAL NOTES

THE CITY OF COLUMBUS CONSTRUCTION AND MATERIAL SPECIFICATIONS (CMSC), 2025 EDITION, INCLUDING ALL REVISIONS AND SUPPLEMENT IN EFFECT AT THE TIME OF SIGNATURES BY THE DIRECTOR OF PUBLIC SERVICE, SHALL GOVERN ALL CONSTRUCTION ITEMS THAT ARE A PART OF THIS PLAN UNLESS NOTED OTHERWISE.

ANY MODIFICATION TO THE WORK AS SHOWN ON THESE DRAWINGS MUST HAVE PRIOR WRITTEN APPROVAL BY THE ADMINISTRATOR, DIVISION OF SEWERAGE AND DRAINAGE.

CONSTRUCTION OF THIS PROJECT MAY NOT BEGIN UNTIL THE EASEMENTS INDICATED ARE RECORDED BY THE CITY.

INSPECTION OF THIS PROJECT SHALL BE PROVIDED BY REPRESENTATIVES OF THE CITY OF COLUMBUS. THE DEVELOPER/OWNER SHALL, PRIOR TO ANY CONSTRUCTION OPERATION, DEPOSIT WITH THE CITY THE TOTAL ESTIMATED COST OF INSPECTION AND, WHERE REQUIRED, A REPAVING GUARANTEE.

THE CONTRACTOR SHALL NOTIFY THE FOLLOWING DIVISIONS AT LEAST 24 HOURS IN ADVANCE OF THE ANTICIPATED START OF CONSTRUCTION,
DIVISION OF SEWERAGE AND DRAINAGE (614/645-7102)
DIVISION OF CONSTRUCTION INSPECTION (614/645-0433)

THE CONTRACTOR SHALL CAREFULLY PRESERVE BENCH MARKS, PROPERTY CORNERS, REFERENCE POINTS, STAKES, AND OTHER SURVEY REFERENCE MONUMENTS OR MARKERS. IN CASE OF WILLFUL OR CARELESS DESTRUCTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR RESTORATIONS. RESETTling OF MARKERS SHALL BE PERFORMED BY AN OHIO PROFESSIONAL SURVEYOR AS APPROVED BY THE ENGINEER.

ALL TEMPORARY TRAFFIC CONTROL DEVICES SHALL BE FURNISHED, ERECTED, MAINTAINED AND REMOVED BY THE CONTRACTOR IN ACCORDANCE WITH THE "OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES," COPIES OF WHICH ARE AVAILABLE FROM THE OHIO DEPARTMENT OF TRANSPORTATION, BUREAU OF TRAFFIC, 1980 WEST BROAD STREET, COLUMBUS, OH 43223.

ALL TRAFFIC LANES SHALL BE FULLY OPEN TO TRAFFIC AT ALL EXISTING PUBLIC ROADWAYS.

INGRESS AND EGRESS SHALL BE MAINTAINED AT ALL TIMES TO PUBLIC AND PRIVATE PROPERTY.

NON-RUBBER Tired VEHICLES SHALL NOT BE MOVED ON PUBLIC STREETS, EXISTING PRIVATE ROADWAYS OR PARKING LOTS. NO EXCEPTIONS SHALL BE GRANTED.

THE CONTRACTOR AND SUB-CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR COMPLYING WITH ALL FEDERAL, STATE, AND LOCAL SAFETY REQUIREMENTS, TOGETHER WITH EXERCISING PRECAUTIONS AT ALL TIMES FOR THE PROTECTION OF PERSONS (INCLUDING EMPLOYEES) AND PROPERTY. IT IS ALSO THE SOLE RESPONSIBILITY OF THE CONTRACTOR AND SUB-CONTRACTOR TO INITIATE, MAINTAIN, AND SUPERVISE ALL SAFETY REQUIREMENTS, PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK.

IN ADDITION TO DIRECT REQUIREMENTS OF THE CONTRACT SPECIFICATIONS, THE CONTRACTOR SHALL OBSERVE AND CONFORM TO THE SPECIFIC REQUIREMENTS OF ALL APPLICABLE CITY ORDINANCES, EASEMENTS, COURT ENTRIES, RIGHTS-OF-ENTRY OR ACTION FILED IN COURT IN ACCORDANCE WITH THE CODE OF APPLICABLE GOVERNING AGENCY. THE COST OF THE OPERATIONS NECESSARY TO FULFILL SUCH REQUIREMENTS SHALL BE INCLUDED IN THE PRICE BID FOR THE SANITARY SEWER IMPROVEMENTS.

FEES

THE APPROPRIATE FEES FOR STANDBY INSPECTIONS, SYSTEM CAPACITY, SEWER TAP PERMITS AND BUILDING PERMITS WILL BE PROVIDED BY THE OWNER.

PERMITS

THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS. AN ORIGINAL PERMIT, WITH RED SIGNATURES, SHALL BE KEPT ONSITE AT ALL TIMES.

WHEN OCCUPYING OR EXCAVATING WITHIN PUBLIC RIGHT-OF-WAY LIMITS, THE CONTRACTOR SHALL OBTAIN AN EXCAVATION PERMIT FROM THE CITY OF COLUMBUS, DEPARTMENT OF PUBLIC SERVICE - PERMIT OFFICE BETWEEN THE HOURS OF 7:30 AM AND 4:00 PM MONDAY THROUGH FRIDAY. PHONE: (614) 645-7497; FAX (614) 645-1876; EMAIL: COLSPERMITS@COLUMBUS.GOV.

SANITARY SEWERS

PIPE SPECIFICATION FOR THE PLAN IMPROVEMENTS SHALL BE IN ACCORDANCE WITH THE FOLLOWING:
- PVC GRAVITY SEWER PIPE ASTM D3034 (SDR-35) FOR 18" DIAMETER PIPE WITH JOINT SPECIFICATIONS AS PER ASTM D3212.

THE CONTRACTOR SHALL PROVIDE WRITTEN CERTIFICATION TO THE ENGINEER REFLECTING THE PIPE MATERIAL TO BE USED ALONG WITH THE CURRENT CITY CONSIGNMENT LIST IDENTIFYING THE APPROVED PIPE MATERIAL SPECIFICATION.

ALL SANITARY SERVICES SHALL BE A MINIMUM OF 2.08% GRADE (1/4" PER FT.) UNLESS OTHERWISE NOTED.

SERVICE RISERS, ITEM 914, SHALL BE INSTALLED WHERE DEPTH FROM THE WYE FITTING TO THE EXISTING OR PROPOSED SURFACE ELEVATION EXCEEDS 10 FEET. TOP OF RISER SHALL BE NO MORE THAN ±9" BELOW THE EXISTING OR PROPOSED SURFACE ELEVATION, WHICHEVER IS HIGHER.

THE CONTRACTOR SHALL FURNISH AND PLACE WYE POLES MADE OF 2" X 2" LUMBER AT ALL RISER LOCATIONS. WYE POLES SHALL EXTEND 3' ABOVE THE GROUND.

THE CONTRACTOR SHALL PLACE CUTOFF TRENCH DAMS OF NATIVE CLAY OR IMPERVIOUS SOILS ACROSS AND ALONG THE TRENCH AT 150-FOOT INTERVALS TO RETARD AND RESIST THE MOVEMENT OF GROUNDWATER THROUGH THE TRENCH GRANULAR BEDDING OR BACKFILL MATERIAL AS NOTED IN CMSC ITEM 901.11.

FIELD LEAKAGE TEST SHALL BE PERFORMED ON ALL SECTIONS OF SANITARY SEWER PROJECTS (INCLUDING SERVICE LINES CONSTRUCTED UNDER THE SEWER PLAN) IN ACCORDANCE WITH 901.20 OF THE CITY OF COLUMBUS MATERIAL SPECIFICATIONS. ALL MANHOLES WILL ALSO BE TESTED IN ACCORDANCE WITH CURRENT 901.20 SPECIFICATIONS.

INFILTRATION/EXFILTRATION LIMITS SHALL NOT EXCEED 100 GALLONS PER INCH OF TRIBUTARY PIPE DIAMETER PER 24 HOURS PER MILE OF PIPE LENGTH (OR COMPUTED EQUIVALENT FOR SHORTER PERIODS OF TIME). ALL SANITARY SEWER SHALL BE TESTED PER THE SPECIFICATIONS.

ALL P.V.C. SEWER LINES SHALL BE DEFLECTION TESTED AFTER INSTALLATION IN CONFORMANCE WITH THE REQUIREMENTS OF ITEM 901.21 OF THE CITY OF COLUMBUS, CONSTRUCTION AND MATERIAL SPECIFICATIONS, CURRENT VERSION.

ACCEPTANCE TESTING, (DEFLECTION AND LEAKAGE) OF ALL SANITARY SEWERS SHALL REQUIRE A 30-DAY WAITING PERIOD FROM THE DATE OF FINAL BACKFILLING. THIS SHALL INCLUDE ALL LATERALS INSTALLED AS PART OF MAINLINE CONSTRUCTION. TESTING SHALL CONFORM TO THE REQUIREMENTS OF ITEM 901 OF THE CITY OF COLUMBUS, CONSTRUCTION AND MATERIAL SPECIFICATIONS CURRENT VERSION.

ROOF DRAINS, FOUNDATION DRAINS, AND OTHER CLEAN WATER CONNECTIONS TO THE SANITARY SEWER SYSTEM ARE PROHIBITED ON THIS PROJECT.

ALL EXISTING INVERTS ALONG WITH THE PROPOSED TOP OF CASTING ELEVATIONS SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION OF THE SEWER.

THE CONTRACTOR SHALL MAKE ALLOWANCE IN HIS BID FOR POSSIBLE ADJUSTMENT ON LEVEL OF MANHOLE TOPS AND SHALL RECEIVE NO ADDITIONAL COMPENSATION BECAUSE OF ANY SUCH ADJUSTMENTS THAT ARE REQUIRED TO BE MADE.

ALL CONCRETE PIPE, STORM AND SANITARY SEWER STRUCTURES SHALL BE STAMPED OR HAVE SUCH IDENTIFICATION NOTING THAT SAID PIPE, STORM AND SANITARY STRUCTURES HAVE BEEN INSPECTED BY THE CITY OF COLUMBUS AND MEET THEIR SPECIFICATIONS. PIPE AND STRUCTURES WITHOUT PROPER IDENTIFICATION WILL NOT BE PERMITTED FOR INSTALLATION.

THE CONTRACTOR SHALL ENSURE THERE IS A SURVEYOR'S LEVEL AND ROD ON THE PROJECT FOR USE IN PERFORMING GRADE CHECKS WHENEVER SEWER LINE STRUCTURES OR PIPE ARE BEING INSTALLED. THE CONTRACTOR SHALL MAKE THIS EQUIPMENT AVAILABLE FOR THE USE OF AND ASSIST THE CITY INSPECTOR IN PERFORMING GRADE CHECKS WHEN REQUESTED BY THE INSPECTOR.

THE INSPECTOR WILL MAKE ALL REASONABLE ATTEMPTS TO CONFINE REQUESTS FOR ASSISTANCE IN PERFORMING GRADE CHECKS TO TIMES CONVENIENT TO THE CONTRACTOR.

THESE CHECKS WILL BE PERFORMED TO ENSURE THE FOLLOWING:

1. PROPER PLACEMENT OF EACH STRUCTURE.
2. PROPER INSTALLATION OF PIPE RUNS.
3. GRADE, AFTER AN OVERNIGHT OR LONGER SHUTDOWN.
4. GRADE, AT ANY OTHER TIME THE INSPECTOR HAS REASON TO QUESTION GRADE

GRADE CHECKS PERFORMED BY THE CITY INSPECTOR IN NO WAY RELIEVE THE CONTRACTOR FOR THE ULTIMATE RESPONSIBILITY TO ENSURE CONSTRUCTION TO THE PLAN GRADE.

BACKFILL SHALL BE IN ACCORDANCE WITH THE SPECIFICATIONS SHOWN ON THE SANITARY SEWER PROFILES, REFERENCE SHEET NO. 2.

EXISTING UTILITIES

THE IDENTITY AND LOCATION OF THE EXISTING UNDERGROUND UTILITY FACILITIES KNOWN TO BE LOCATED IN THE CONSTRUCTION AREA HAVE BEEN SHOWN ON THE PLANS AS ACCURATELY AS PROVIDED BY THE OWNER OF THE UNDERGROUND UTILITY. THE CITY OF COLUMBUS AND/OR THE CONSULTING ENGINEER ASSUMES NO RESPONSIBILITY TO THE ACCURACY OF THE LOCATIONS OR THE DEPTHS OF THE UNDERGROUND FACILITIES SHOWN ON THE PLANS.

THE CONTRACTOR IS RESPONSIBLE FOR THE INVESTIGATION, LOCATION, SUPPORT, PROTECTION AND RESTORATION OF ALL EXISTING UTILITIES AND APPURTENANCES WHETHER SHOWN ON THESE PLANS OR NOT. THE CONTRACTOR SHALL EXPOSE ALL UTILITIES OR STRUCTURES PRIOR TO CONSTRUCTION TO VERIFY THE VERTICAL AND HORIZONTAL EFFECT ON THE PROPOSED CONSTRUCTION.

THIS WORK INCLUDES MAINTENANCE OF ADEQUATE DEPTH ON ALL EXISTING UTILITY FACILITIES. THE CONTRACTOR IS RESPONSIBLE TO IDENTIFY AND COORDINATE FIELD STAKEOUT OF ALL LOCATIONS OF POSSIBLE GRADE CONFLICTS WITH EXISTING UTILITIES PRIOR TO CONSTRUCTION. THE COST OF THIS WORK SHALL BE INCLUDED IN THE BID PRICE FOR THE SANITARY SEWER IMPROVEMENTS. THE CONTRACTOR SHALL CALL, TOLL FREE, THE OHIO UTILITIES PROTECTION SERVICE (TELEPHONE 800-362-2764 TOLL-FREE) 72 HOURS PRIOR TO CONSTRUCTION AND SHALL NOTIFY ALL UTILITY COMPANIES AT LEAST 48 HOURS PRIOR TO WORK IN THE VICINITY OF THEIR UNDERGROUND LINES.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING THE RELOCATION AND/OR PROTECTION OF ANY UTILITIES AS REQUIRED BY THE PLAN WITH THE OWNER OF THE AFFECTED UTILITY.

PRIVATE UTILITY MANHOLES WITHIN THE LIMITS OF THE WORK SHALL BE ADJUSTED TO GRADE BY THE RESPECTIVE UTILITY.

THE FLOW IN ALL SEWERS, DRAINS, FIELD TILES AND WATERCOURSES ENCOUNTERED SHALL BE MAINTAINED BY THE CONTRACTOR AT HIS EXPENSE, AND WHENEVER SUCH WATERCOURSES AND DRAINS ARE DISTURBED OR DESTROYED DURING THE PROSECUTION OF THE WORK, THEY SHALL BE RESTORED BY THE CONTRACTOR AT HIS OWN COST AND EXPENSE TO A CONDITION SATISFACTORY TO THE CONSTRUCTION MANAGER.

ALL DRAIN TILE AND STORM SEWERS DAMAGED, DISTURBED, OR REMOVED AS A RESULT OF THE CONTRACTOR'S OPERATIONS SHALL BE REPLACED WITH THE SAME QUALITY PIPE OR BETTER, MAINTAINING THE SAME GRADIENT AS EXISTING. THE DRAIN TILE AND/OR STORM SEWER SHALL BE CONNECTED TO THE CURB SUBDRAIN, STORM SEWER SYSTEM OR PROVIDED WITH AN OUTLET INTO THE ROADWAY DITCH AS APPLICABLE. REPLACED DRAIN TILE/STORM SEWER SHALL BE Laid ON COMPACTED BEDDING EQUAL IN DENSITY TO SURROUNDING STRATUM. COST OF THIS WORK TO BE INCLUDED IN THE PRICE BID FOR THE SANITARY SEWER IMPROVEMENTS.

DEWATERING

THE CONTRACTOR IS RESPONSIBLE TO PROVIDE ALL DEWATERING OPERATIONS AS REQUIRED TO ACCOMPLISH THE PROPOSED CONSTRUCTION OPERATIONS. REFERENCE THE SOILS REPORT FOR GROUNDWATER CONSIDERATIONS.

INSTALLATION OF ANY WELL, WELL POINT, PIT OR OTHER DEVICE USED FOR THE PURPOSE OF REMOVING GROUNDWATER FROM AN AQUIFER SHALL BE IN ACCORDANCE WITH THE APPLICABLE REQUIREMENTS OF THE OHIO DEPARTMENT OF NATURAL RESOURCES.

THE CONTRACTOR SHALL BE RESPONSIBLE TO PLACE AND MAINTAIN THE NECESSARY SEDIMENT CONTROL MEASURES TO FILTER THE DEWATERING DISCHARGE. COST FOR THE ABOVE SHALL BE INCLUDED IN THE BID PRICE FOR THE SANITARY SEWER IMPROVEMENTS.

TEMPORARY SOIL EROSION AND SEDIMENT CONTROL

THE SITE UTILITY CONTRACTOR SHALL BE RESPONSIBLE FOR SUPPLEMENTING AND / OR REPLACING SITE EROSION AND SEDIMENTATION CONTROL AS REQUIRED TO ACCOMMODATE INSTALLATION OF THE SANITARY SEWER. TEMPORARY REMOVAL OF THE EROSION AND SEDIMENTATION CONTROL FEATURES SHALL BE COORDINATED WITH THE CONSTRUCTION MANAGER.

SILT BARRIERS SHALL BE INSTALLED BY THE CONTRACTOR TO PREVENT SEDIMENT LADEN RUNOFF FROM ENTERING THE STORM SEWERS IN THE EVENT OF RAINFALL.

CONTRACTOR SHALL REMOVE DAILY ALL MUD, SOIL, AND DEBRIS THAT MAY BE TRACKED ONTO EXISTING STREETS, DRIVES, OR WALKS BY HIS EQUIPMENT OR THAT OF SUBCONTRACTORS OR SUPPLIERS.

IT IS THE RESPONSIBILITY OF THE SITE OWNER TO NOTIFY THE CITY OF COLUMBUS 2 WORKING DAYS PRIOR TO COMMENCEMENT OF THE INITIAL SITE LAND DISTURBANCE ON ANY SITE OF ONE OR MORE ACRES. THIS INCLUDES SITE CLEARING, GRUBBING, AND EARTH MOVING. PRIMARY EROSION AND SEDIMENT CONTROL PRACTICES ARE MANDATED BY REGULATION TO BE IN PLACE FROM THE BEGINNING OF THE CONSTRUCTION ACTIVITY. PLEASE CONTACT THE STORMWATER MANAGEMENT OFFICE @ (614) 645-6700 OR FAX @ (614) 645-1840. DETAILS OF THIS REQUIREMENT MAY BE FOUND IN THE EROSION AND SEDIMENT CONTROL REGULATION (ADOPTED JUNE 1, 1994). FAILURE TO COMPLY MAY RESULT IN ENFORCEMENT ACTION AS DETAILED IN THE CITY OF COLUMBUS CODES SECTION 1145.80.

EROSION AND SEDIMENT CONTROL MEASURES ARE REQUIRED AS PART OF THIS PROJECT. EROSION AND SEDIMENT CONTROL MEASURES SPECIFIC TO THIS SITE MAY BE FOUND ON DRAWING NUMBER CC-20721. LAND-DISTURBING ACTIVITIES MUST COMPLY WITH ALL PROVISIONS OF THE DIVISION OF SEWERAGE AND DRAINAGE EROSION AND SEDIMENT CONTROL REGULATION. ALL LAND-DISTURBING ACTIVITIES SHALL BE SUBJECT TO INSPECTION AND SITE INVESTIGATION BY THE CITY OF COLUMBUS AND/OR THE OHIO EPA. FAILURE TO COMPLY WITH THESE REGULATIONS IS SUBJECT TO LEGAL ENFORCEMENT ACTION.


CITY OF COLUMBUS, OHIO

SANITARY SEWER PLAN


FOR:

4600 KENNY ROAD SEWER RECONSTRUCTION

2025

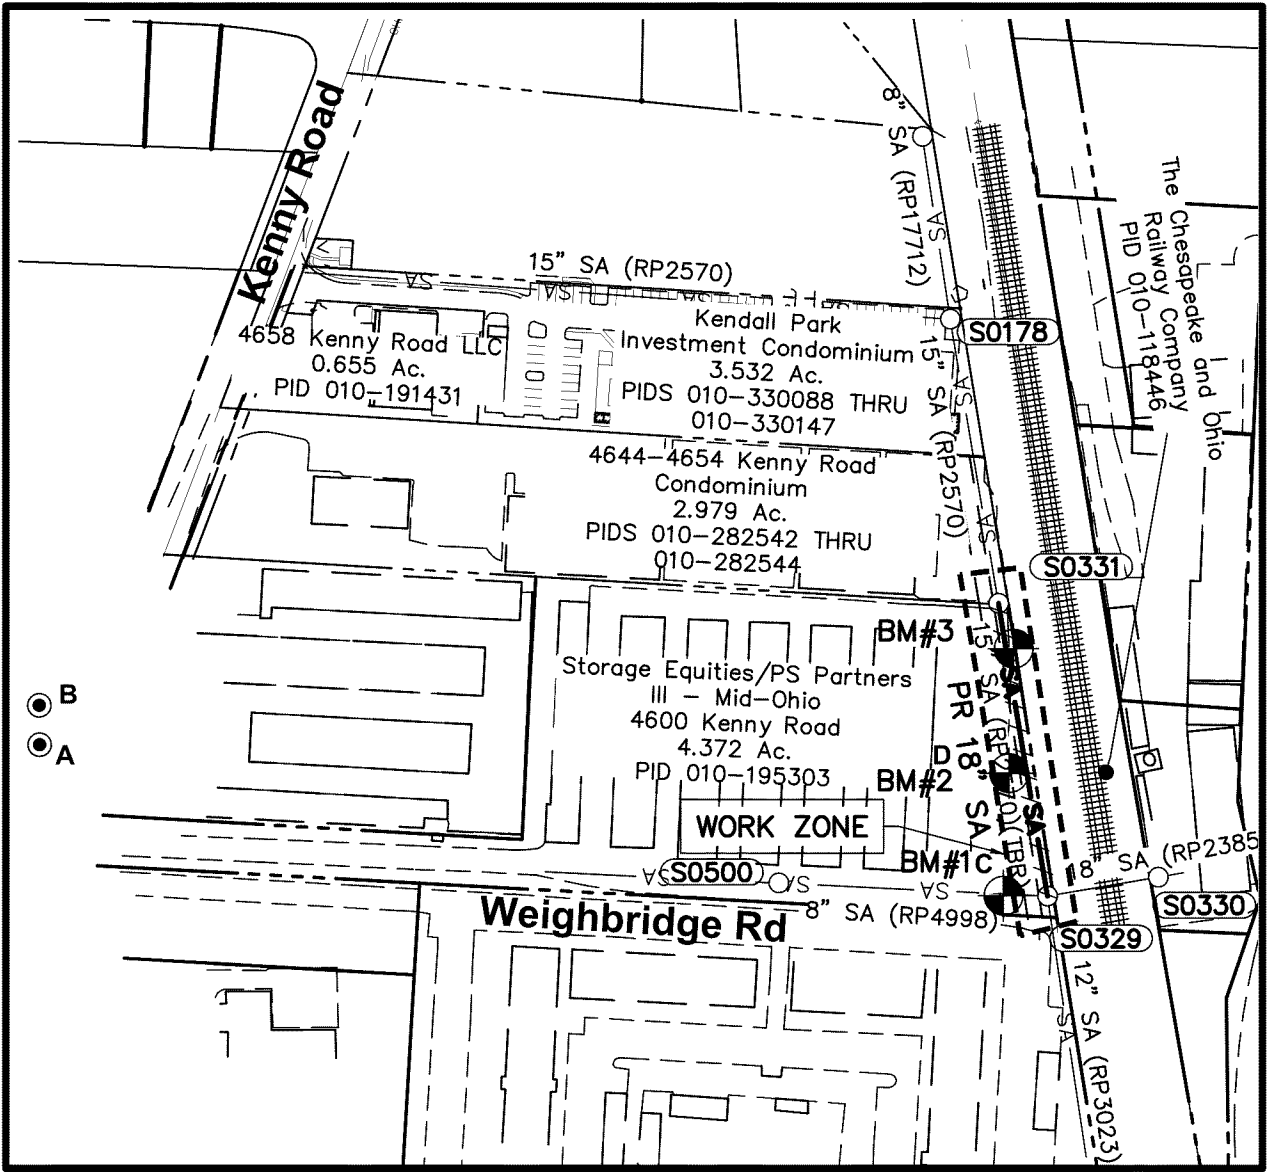


INDEX MAP
SCALE: 1" = 200'

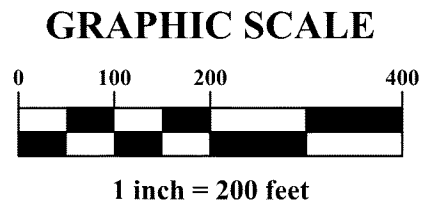

LEGEND

- (S0XXX) EXISTING MANHOLE NUMBER
- SA — PROPOSED SANITARY SEWER
- SA — EXISTING SANITARY SEWER
- SA — EXISTING SANITARY SEWER (TBR)

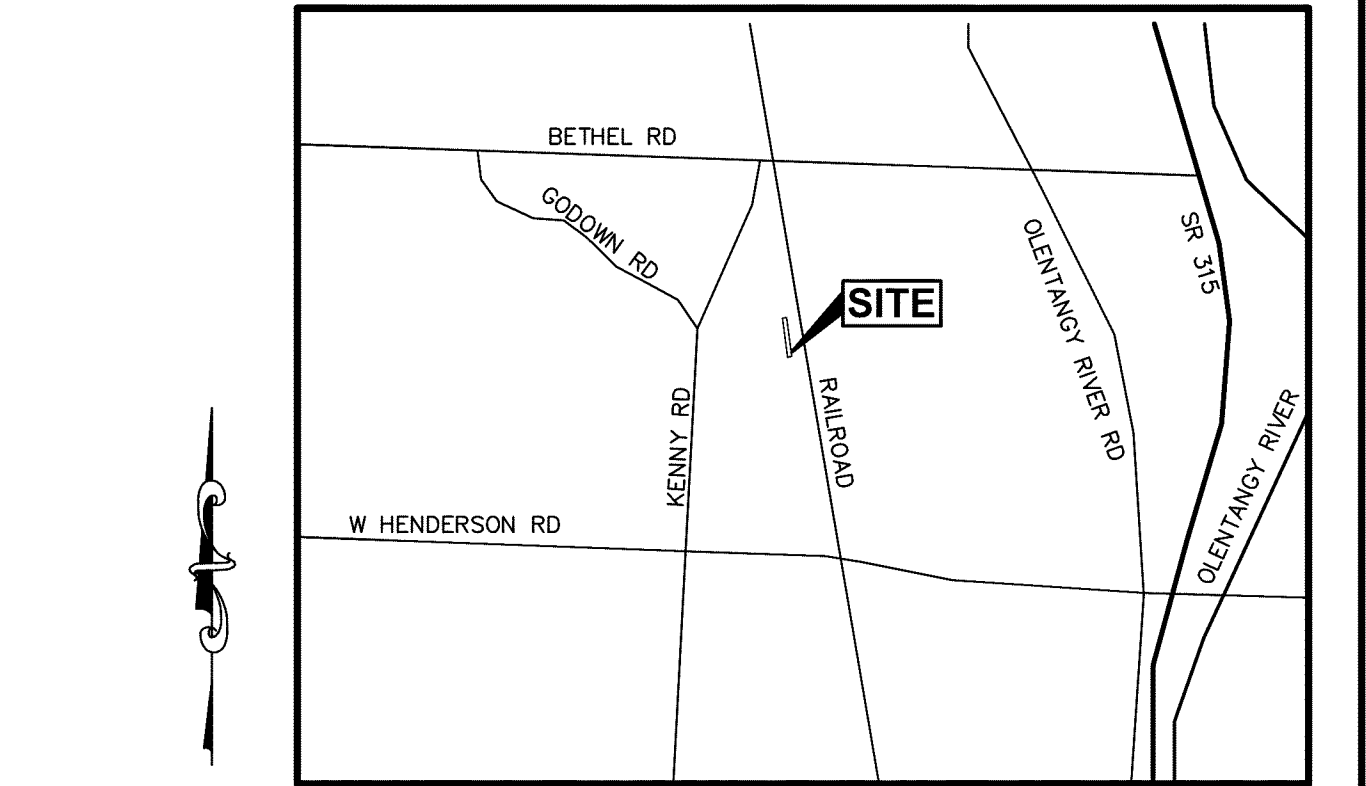

ALL AREAS SHOWN WITHIN LOCATION MAP ARE LOCATED IN THE CITY OF COLUMBUS.

SITE LOCATION MAP
NOT TO SCALE

ENGINEER — APPLICANT
ADVANCED CIVIL DESIGN, INC.
781 SCIENCE BOULEVARD, SUITE 100
GAHANNA, OH 43230
PHONE (614) 428-7750
FAX (614) 428-7755
CONTACT: THOMAS M. WARNER, P.E.
EMAIL: TWARNER@ADVANCEDCIVILDISEGN.COM

APPLICANT — DEVELOPER
PREFERRED LIVING
750 COMMUNICATIONS PARKWAY, STE 250
COLUMBUS, OHIO 43214
PHONE: 614-901-2400
FAX: N/A
CONTACT: JARED SMITH
EMAIL: JSMITH@LIVEPREFERRED.COM

STANDARD CONSTRUCTION DRAWINGS
THE STANDARD CONSTRUCTION DRAWINGS LISTED ON THESE PLANS SHALL BE A PART THEREOF.

CITY OF COLUMBUS
AA-S110
AA-S149
AA-S151
SS-03
SS-05
SS-10
1441 (7/1/2024)

BENCHMARKS

BASED ON FRANKLIN COUNTY MONUMENTS (NAVD 1988 DATUM).

SOURCE — ELEVATIONS WERE ESTABLISHED USING 45 MINUTE STATIC OBSERVATIONS UTILIZING GLOBAL POSITIONING SYSTEM (GPS) PROCEDURES. THE GPS DATA WAS SUBMITTED TO THE NATIONAL GEODETIC SURVEYS (NGS) ONLINE POSITIONING USER SERVICE RAPID-STATIC (OPUS-RS) SYSTEM FOR PROCESSING. THE SYSTEM USES THE CONTINUALLY OPERATING REFERENCE STATIONS (CORS) TO ESTABLISH THE GEODETIC ELEVATION.

SITE BM 1 — CAPPED IRON PIN LOCATED ON THE INDEX MAP AND SHOWN AS "BM#1".
NAVD 1988 ELEVATION = 823.65
NGVD 1929 ELEVATION = 824.21

SITE BM 2 — CAPPED IRON PIN LOCATED ON THE INDEX MAP AND SHOWN AS "BM#2".
NAVD 1988 ELEVATION = 824.08
NGVD 1929 ELEVATION = 824.64

SITE BM 3 — CAPPED IRON PIN LOCATED ON THE INDEX MAP AND SHOWN AS "BM#3".
NAVD 1988 ELEVATION = 824.35
NGVD 1929 ELEVATION = 824.91

HORIZONTAL REFERENCE POINTS			
NORTHING	EASTING	DESCRIPTION	REF #
750222.3260	1814717.1630	MAG NAIL	A
750263.4240	1814716.8030	MAG NAIL	B
750065.0120	1815721.0620	IRON PIN	C
750192.5350	1815726.9080	IRON PIN	D

HORIZ. REFERENCE DATUM =
NAD 83 (NSRS 2011 ADJUSTMENT) OHIO SOUTH ZONE

Z:\24-0270-65\DWG\PRODUCTION DRAWINGS\SANITARY - OFFSITE\Title and Notes.dwg CC-SA (TITLE) Sep 05, 2025 11:40:59pm ctabler

EASEMENT REFERENCE				REVISIONS			PLAN PREPARED BY:		APPROVED: FOR SANITARY SEWERS ONLY		PROJECT TITLE:				CITY OF COLUMBUS, OHIO DEPARTMENT OF PUBLIC UTILITIES DIVISION OF SEWERAGE AND DRAINAGE		
CITY NO.	COUNTY RECORDER	GRANTOR	NO.	DESCRIPTION	APPROVAL/DATE	ADVANCED CIVIL DESIGN ENGINEERS & SURVEYORS		SIGNATURES BELOW SIGNIFY ONLY CONCURRENCE WITH THE GENERAL PURPOSES AND GENERAL LOCATION OF THE PROJECT. ALL TECHNICAL DETAILS REMAIN THE RESPONSIBILITY OF THE ENGINEER PREPARING THE PLANS.		APPROVAL FOR SANITARY SEWERS ONLY.		SANITARY SEWER PLAN FOR 4600 KENNY ROAD SEWER RECONSTRUCTION				DIVISION USE ONLY	
						CHRISTOPHER W. HUBER, P.E. 82455		CITY ENGINEER/ADMINISTRATOR, DIVISION OF DESIGN & CONSTRUCTION		9/10/2025		OWNER				SCALE: AS NOTED	
								ADMINISTRATOR, DIVISION OF POWER		9/8/2025		CONTRACTOR				SHEET 1 / 2	
								ADMINISTRATOR, DIVISION OF SEWERAGE AND DRAINAGE		9/10/2025		INSPECTOR				RECORD PLAN NO.	
								ADMINISTRATOR, DIVISION OF WATER		9/8/2025		AGREEMENT COMPLETED					
								INDEX DETAIL				RPD CKD CID CON.DR.					
								RECORD FILE									