


Bidder Tabulation - Bid #RFQ008672

Purchase of Box Truck

Opened April 26, 2018

Vendor #	Line #	Type	Alt.	Total	Product name	Qty	Unit price	Comment	Lead Time
4301	Header			\$ 58,965.00					
4301	Line	10		\$ 58,965.00	Gasoline Powered Box Truck	1	\$ 58,965.00		0.00
6602	Header			\$ 48,802.00					
6602	Line	10		\$ 48,802.00	Gasoline Powered Box Truck	1	\$ 48,802.00		0



## ESEC ISUZU TRUCK

Timothy Darr | (614)875-3732 | columbuspeterbilt@ameritech.net

City Box Truck (2017 NPR-HD Gas Cab Chassis, FE4 176", 14,500 GVWR. White, Standard model specifications with power windows and door locks)

### Selected Model and Options

	Code	Description	Weight
<b>Model</b>			
	FE4	NPR-HD Gas Cab Chassis 176	
	04	White, Standard model specifications with power windows and door locks	
<b>Options</b>			
	04	White, Standard model specifications with power windows and door locks	0.0 lbs.
	AQB	Driver seat is reclining high back. Two single occupant fold down seats with tray backs.	0.0 lbs.
	BUC	Back Up Camera	1.0 lbs.
	C60	Air conditioner	0.0 lbs.
	ET1	2 Rows Etrac @ 30" & 52" up	0.0 lbs.
	FNW	176 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20 in3 RBM 316,800 lb./ft./in per rail.	0.0 lbs.
	FRG	6 Recessed floor tie downs	2.0 lbs.
	I0J	AM/FM/CD Radio with Aux input/USB port	0.0 lbs.
	I36	R040, single-speed, 11,020 lb. capacity with oil lubricated rear wheel bearings.	0.0 lbs.
	I41	Single horizontal aluminized steel with catalytic converter and oxygen sensor devices.	0.0 lbs.
	I5H	LRR (low rolling resistance)	0.0 lbs.
	I5P	2 rows E-track recess mt. on sides and surface mt. on front (C/L @ 24" & 48" above floor) ply 20	152.0 lbs.
	I7B	297 HP gross @ 4300 RPM; 372 lb.-ft. gross torque @ 4000 RPM	0.0 lbs.
	I8B	225/70R19.5F (14 ply) tubeless Radial, all season tread	0.0 lbs.
	I8J	12,900 lbs. Capacity semi elliptical; main and auxiliary multi- leaf spring. Includes shock absorbers.	0.0 lbs.
	I9B	225/70R19.5F (14 ply) tubeless Radial, all season tread.	0.0 lbs.
	IB9	19.5" x 6", 6-hole disc, painted white	0.0 lbs.
	IC1	19.5" x 6", 6-hole disc, painted white	0.0 lbs.
	IC6	5.375:1	0.0 lbs.
	ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.	0.0 lbs.
	ID8	8440 lbs. Capacity semi elliptical tapered leaf spring. Includes shock absorbers and stabilizer bar	0.0 lbs.
	IF6	Fire Extinguisher and Triangle Kit mounted in rear organizer on standard cab and under rear seat on crew cab	19.0 lbs.

Current report content is based on data as of 2018-04-06 09:10:12. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



## ESEC ISUZU TRUCK


Timothy Darr | (614)875-3732 | columbuspeterbilt@ameritech.net

City Box Truck (2017 NPR-HD Gas Cab Chassis, FE4 176", 14,500 GVWR. White, Standard model specifications with power windows and door locks)

### Selected Model and Options

Code	Description	Weight
IG5	30 gal. rectangular fuel tank. Mounted between frame rail with electric type fuel pump (mounted in tank). Through the rail fuel fill.	0.0 lbs.
IL0	Yes	0.0 lbs.
IL2	145 Amp. output with integral regulator.	0.0 lbs.
IL3	Single Delco 12-V maintenance free 750 CCA frame mounted battery box	0.0 lbs.
IR8	Dual circuit, vacuum assisted hydraulic with EBD (Electronic Brake Distribution). Disc front and self-adjust outboard mounted drum rear. Mechanical, transmission mounted parking brake. Non-asbestos semi metallic linings are standard. 4 channel anti-lock brake system.	0.0 lbs.
IS0	Heated Mirrors	1.0 lbs.
IX2	Rear body dome lamp switch	0.1 lbs.
KNX	Dry paper single element. Air cleaner canister standard with air restriction gauge.	0.0 lbs.
L96	GMPT-V8 8 cylinder V block, four cycle overhead valve water cooled Vortec 6 Liter SFI V8. Electronically controlled sequential port fuel injection. Six bolt main cap design for heavy duty performance. Engine Control Module (ECM) and Transmission Control Module (TCM) engine control system. Engine cruise control, engine oil cooler.	0.0 lbs.
LG1	Theiman TVL30 Liftgate	5.0 lbs.
M18	MORGAN FASTRACK ( Van Body ) Hardwood Floor / Plywood Lining, 20' X 96" X 91"	3,061.0 lbs.
MYD	6L90-E Hydra-Matic, 6-speed automatic with lock-up converter and overdrive. Ratios: Gear and Ratios 4.027, 2.364, 1.532, 1.152, 0.0852, 0.667, Rev. 3.064:1	0.0 lbs.
PH1	20 Ton Pintle Hook	2.0 lbs.
RFL	Dual Rear Flood Lights	2.0 lbs.
SFL	Side Flood Lights	2.0 lbs.
TWP	Tow Pkg incl. RV Plug & Controller	2.0 lbs.
UZF	Back up alarm	1.0 lbs.

Current report content is based on data as of 2018-04-06 09:10:12. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



# ESEC ISUZU TRUCK


Timothy Darr | (614)875-3732 | columbuspeterbilt@ameritech.net

City Box Truck (2017 NPR-HD Gas Cab Chassis, FE4 176", 14,500 GVWR. White, Standard model specifications with power windows and door locks)

## Standard Equipment Summary

Code	Description
<b>Tires</b>	
I5H	LRR (low rolling resistance)
<b>Engine</b>	
L96	GMPT-V8 8 cylinder V block, four cycle overhead valve water cooled Vortec 6 Liter SFI V8. Electronically controlled sequential port fuel injection. Six bolt main cap design for heavy duty performance. Engine Control Module (ECM) and Transmission Control Module (TCM) engine control system. Engine cruise control, engine oil cooler.
<b>Engine Rating</b>	
I7B	297 HP gross @ 4300 RPM; 372 lb.-ft. gross torque @ 4000 RPM
<b>Transmission</b>	
MYD	6L90-E Hydra-Matic, 6-speed automatic with lock-up converter and overdrive. Ratios: Gear and Ratios 4.027, 2.364, 1.532, 1.152, 0.0852, 0.667, Rev. 3.064:1
<b>Wheelbase</b>	
FNW	176 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20 in <sup>3</sup> RBM 316,800 lb./ft./in per rail.
<b>Air Cleaner</b>	
KNX	Dry paper single element. Air cleaner canister standard with air restriction gauge.
<b>Alternator</b>	
IL2	145 Amp. output with integral regulator.
<b>Battery</b>	
IL3	Single Delco 12-V maintenance free 750 CCA frame mounted battery box
<b>Exhaust</b>	
I41	Single horizontal aluminized steel with catalytic converter and oxygen sensor devices.
<b>Front Axle</b>	
ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.
<b>Front Suspension</b>	
ID8	8440 lbs. Capacity semi elliptical tapered leaf spring. Includes shock absorbers and stabilizer bar
<b>Front Wheels</b>	
IB9	19.5" x 6", 6-hole disc, painted white
<b>Front Tires</b>	
I8B	225/70R19.5F (14 ply) tubeless Radial, all season tread
<b>Rear Suspension</b>	
I8J	12,900 lbs. Capacity semi elliptical; main and auxiliary multi- leaf spring. Includes shock absorbers.
<b>Rear Axle</b>	
I36	R040, single-speed, 11,020 lb. capacity with oil lubricated rear wheel bearings.
<b>Ratio</b>	
IC6	5.375:1
<b>Rear Wheels</b>	
IC1	19.5" x 6", 6-hole disc, painted white
<b>Rear Tires</b>	

Current report content is based on data as of 2018-04-06 09:10:12. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



## ESEC ISUZU TRUCK

Timothy Darr | (614)875-3732 | columbuspeterbilt@ameritech.net

City Box Truck (2017 NPR-HD Gas Cab Chassis, FE4 176", 14,500 GVWR. White, Standard model specifications with power windows and door locks)

### Standard Equipment Summary

Code	Description
I9B	225/70R19.5F (14 ply) tubeless Radial, all season tread.
<b>Fuel Tank</b>	
IG5	30 gal. rectangular fuel tank. Mounted between frame rail with electric type fuel pump (mounted in tank). Through the rail fuel fill.
<b>Seat</b>	
AQB	Driver seat is reclining high back. Two single occupant fold down seats with tray backs.
<b>Brakes</b>	
IR8	Dual circuit, vacuum assisted hydraulic with EBD (Electronic Brake Distribution). Disc front and self-adjust outboard mounted drum rear. Mechanical, transmission mounted parking brake. Non-asbestos semi metallic linings are standard. 4 channel anti-lock brake system.
<b>Air Conditioning</b>	
C60	Air conditioner
<b>Power Windows &amp; Door Locks</b>	
IL0	Yes
<b>Radio</b>	
I0J	AM/FM/CD Radio with Aux input/USB port
<b>Model Option</b>	
04	White, Standard model specifications with power windows and door locks

Current report content is based on data as of 2018-04-06 09:10:12. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



## ESEC ISUZU TRUCK

Timothy Darr | (614)875-3732 | columbuspeterbilt@ameritech.net

City Box Truck (2017 NPR-HD Gas Cab Chassis, FE4 176", 14,500 GVWR. White, Standard model specifications with power windows and door locks)


### Warranty

Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)		Percent of Dealer's Normal Charge Paid by Owner	
	Time	Vehicle Miles	Parts	Labor
Basic	0-3 Years	0-36,000	No Charge	No Charge
Engine	0-5 Years	0-75,000	No Charge	No Charge
• Transmission	0-5 Years	0-75,000	No Charge	No Charge
• Drive Axle				
• Driveshaft				
• Front Axle I-Beam				
• Crossmembers				
Frame Rails	0-3 Years	0-36,000	No Charge	No Charge
Frame Rails	3-5 Years	Unlimited	50%	50%
Engine Emissions Control System	0-5 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System California	0-3 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System California	0-7 Years	0-70,000	No Charge	No Charge
Tires	0-2 Years	0-24,000	No Charge	No Charge
Corrosion (Rust Through)	0-4 Years	Unlimited	No Charge	No Charge

Current report content is based on data as of 2018-04-06 09:10:12. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

# NPR-HD GAS

## STANDARD CAB

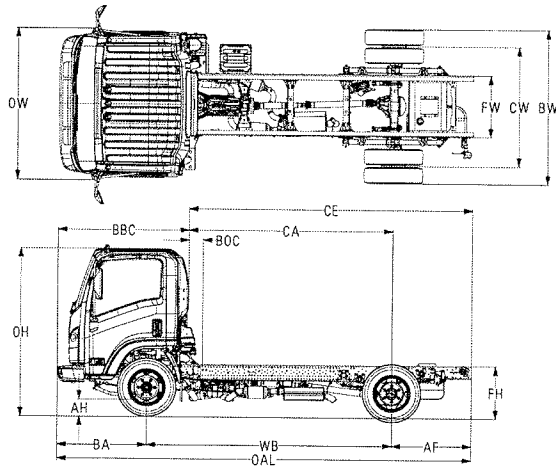

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	6.5	200.5	10-12	81.3	65.6	91.1
132.5	110.0	153.1	6.5	224.0	14	81.3	65.6	91.1
150.0	127.5	170.6	6.5	241.5	16-18	81.3	65.6	91.1
176.0	153.5	196.6	6.5	267.5	18-20	81.3	65.6	91.1

<b>GVWR/GCWR</b>	14,500/20,500 lbs.
<b>BODY/PAYLOAD ALLOWANCE</b>	8,977 - 9,174 lbs.
<b>GAWR</b> Front Rear	6,630 lbs. 11,020 lbs.
<b>FRONT AXLE CAPACITY</b>	6,830 lbs.
<b>REAR AXLE CAPACITY</b> Ratio	11,020 lbs. 4.300
<b>SUSPENSION F/R SPRINGS</b> Capacity	Tapered/Multi-Leaf 8,440/12,900 lbs.
<b>FRAME</b> Section Modulus Resistance Bending Moment	7.20 in. <sup>3</sup> 316,800 lb.-in.
<b>SERVICE BRAKES</b> Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum
<b>TRANSMISSION</b>	6L90 6-speed auto. with double overdrive and lock-up converter
<b>ENGINE</b>  Displacement Engine Power Engine Torque	GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8 - Alternative Fuel Capable Engine)  6.0L (365 in. <sup>3</sup> ) 297 hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm
<b>LIMITED SLIP DIFFERENTIAL</b>	Optional
<b>ALTERNATOR</b>	145-amp
<b>BATTERIES</b>	1 Maintenance-Free 750-CCA
<b>TIRES LRR</b> (Low Rolling Resistance)	225/70R19.5G (14-pr) Standard
<b>STEERING</b>	Integral Hydraulic Power
<b>STEERING COLUMN</b>	Tilt and Telescopic
<b>FUEL TANK</b> Standard	30 gal. in-frame

### 2018 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage of Dealer's Normal Charge Paid by Owner	
	Time in Years	Vehicle Miles	Parts	Labor
Basic	0-3 Years	0-36,000	No Charge	No Charge
Engine	0-5 Years	0-75,000	No Charge	No Charge
• Transmission				
• Drive Axle				
• Driveshaft	0-5 Years	0-75,000	No Charge	No Charge
• Front Axle I-Beam				
• Crossmembers				
Frame Rails	0-3 Years	0-36,000	No Charge	No Charge
	3-5 Years	Unlimited	50%	50%
Federal Emissions	0-5 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System (NPR model) California	0-3 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System (NPR model) California	0-7 Years	0-70,000	No Charge	No Charge
Tires	0-2 Years	0-24,000	No Charge	No Charge
Corrosion (Rust Through)	0-4 Years	Unlimited	No Charge	No Charge

\*The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. See your authorized Isuzu dealer for warranty details.