



November 14, 2016

Kelly W. Reagan
City of Columbus Fleet Administrator
4211 Groves Rd.
Columbus, Ohio 43232

Gentlemen,

We hereby propose to furnish to you the following Emergency Medical Vehicle Re-chassis upon your acceptance of this proposal.

(1) 2018 International chassis and Horton 623 Type I Walk-Thru all aluminum Emergency Medical Vehicle (**Medic 24**) Re-chassis delivered in accordance to the enclosed Selected Features List #12032, which we hereby make part of our proposal, complete and delivered for the sum of **\$161,978.00** due upon delivery.
(See attached proposal breakdown)

The new Emergency Medical Vehicle shall be delivered approximately 180-220 days after receipt of contract, barring any delays due to strikes, availability of component parts, or Acts of God.

If you have any questions, please do not hesitate to call.

Respectfully submitted,

Accepted By: _____

By: *Michael P. Olney*

Title: _____


Michael P. Olney
Direct Sales Representative
Horton Emergency Vehicles

Date: _____

Prepared For:
CITY OF COLUMBUS FIRE 2018 M.Y. FALL
PURCHASE
MIKE OLNEY
3800 Mcdowell Rd.
Grove City, OH 43123-
(614)539 - 8181
Reference ID: N/A

Presented By:
RUSH TRUCK CENTERS
Timothy M White
4200 CURRENCY DRIVE
COLUMBUS OH 43228 -
(614)876-3500

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

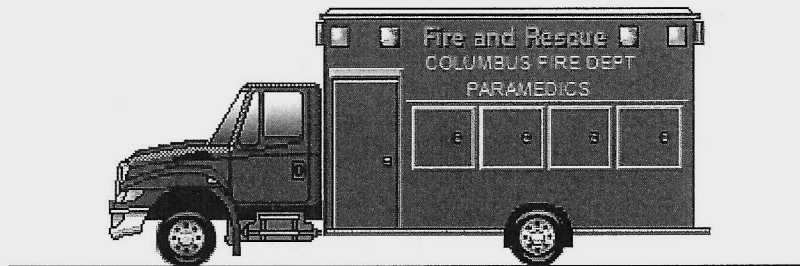

Model Profile
2018 4300 SBA LP 4X2 (MH025)

APPLICATION:	Rescue
MISSION:	Requested GVWR: 25500. Calc. GVWR: 21000 Calc. Start / Grade Ability: 0.00% / 0.00% @ 0 MPH Calc. Geared Speed: N/A
DIMENSION:	Wheelbase: 175.00, CA: 107.90, Axle to Frame: 63.00
ENGINE, DIESEL:	{Cummins B6.7 260} EPA 2017, 260 HP @ 2400 RPM, 660 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 260 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 2200_EVS_P} 5th Generation Controls; Close Ratio, 6-Speed, with Double Overdrive; Includes Park Pawl, with PTO Provision, Less Retarder, with 26,000-lb GVW & GCW Max.
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-09-122A} I-Beam Type, 9,000-lb Capacity
AXLE, REAR, SINGLE:	{Navistar Select} Single Reduction, 17,500-lb Capacity, With 190 Wheel Ends Gear Ratio: 4.33
CAB:	Conventional
TIRE, FRONT:	(2) 245/70R19.5 Load Range G G647 RSS (GOODYEAR), 626 rev/mile, 75 MPH, All-Position
TIRE, REAR:	(4) 245/70R19.5 Load Range G G622 RSD (GOODYEAR), 620 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, AIR, SINGLE:	{International} Ride Optimized Suspension (IROS); 12,000-lb Capacity, 5.3" Ride Height, With Shock Absorbers
PAINT:	Cab schematic 100GA Location 1: 2319, Red (Custom) Chassis schematic N/A

(0012EJV)

ATTACHMENTS: 0012TSY 0007WZX 0007SCP

<u>Parameter</u>	<u>Value</u>	<u>UOM</u>
Max Accelerator Vehicle Speed	75	MPH
Road Speed Governor Upper Droop	0	MPH
Road Speed Governor Lower Droop	0	MPH
Max Engine Speed No Veh Speed Sensr	2020	RPM
Idle Speed Adjustment Enable	Y, ENABLE FEATURE OR FUNCTION	N/A
Low Idle Speed	750	RPM
Idle Shutdown Enable	N, DISABLE FEATURE OR FUNCTION	N/A
ISD Time Before Shutdown	60.0	MIN
ISD Percent Engine Loading	100	%
ISD With PTO	N, DISABLE FEATURE OR FUNCTION	N/A
ISD Manual Override	N, DISABLE FEATURE OR FUNCTION	N/A
ISD With Parking Brake Set	N, DISABLE FEATURE OR FUNCTION	N/A
ISD Ambient Temperature Override	N, DISABLE FEATURE OR FUNCTION	N/A
ISD Cold Ambient Air Temperature	30	F
ISD Intermediate Ambient Air Temp	40	F
ISD Hot Ambient Air Temperature	81	F
ISD Manual Override Inhibit Zone En	N, DISABLE FEATURE OR FUNCTION	N/A
ISD Hot Ambient Automatic Override	N, DISABLE FEATURE OR FUNCTION	N/A
ISD Engine Coolant Temp Threshold	30	F
Cruise Control Enable	Y, ENABLE FEATURE OR FUNCTION	N/A
CC Maximum Vehicle Speed	75	MPH
CC Save Set Speed	N, DISABLE FEATURE OR FUNCTION	N/A
CC Upper Droop	0.0	MPH
CC Lower Droop	0.0	MPH
CC Auto Resume	N, DISABLE FEATURE OR FUNCTION	N/A
CC Ovrspd Retard Activation Enable	N, DISABLE FEATURE OR FUNCTION	N/A
CC Overspeed for Max Retarder	0.0	MPH
CC Overspeed for Min Retarder	0.0	MPH
Retarder - Min Vehicle Speed	10	MPH
Retarder - Delay Time	0.5	SEC
Retarder - Service Brake Activation	N, DISABLE FEATURE OR FUNCTION	N/A
Remote Accelerator Enable	N, DISABLE FEATURE OR FUNCTION	N/A
Remote Accelerator Mode	1, REMOTE ACCELERATOR PEDAL OR LEVER WITH TRANS VERIFICATION	N/A
PTO Enable	Y, ENABLE FEATURE OR FUNCTION	N/A
PTO In Cab Mode	Y, ENABLE FEATURE OR FUNCTION	N/A
Remote PTO Enable	N, DISABLE FEATURE OR FUNCTION	N/A
Remote Station PTO Enable	N, DISABLE FEATURE OR FUNCTION	N/A
PTO Max Engine Speed	2600	RPM
PTO Min Engine Speed	750	RPM
PTO Maximum Engine Load	800	LB-FT
PTO Max Vehicle Speed	5	MPH
PTO Accelerator Override	N, DISABLE FEATURE OR FUNCTION	N/A
PTO Accel Override Max Engine Speed	2800	RPM
PTO Clutch Override	N, DISABLE FEATURE OR FUNCTION	N/A
PTO Service Brake Override	Y, ENABLE FEATURE OR FUNCTION	N/A
PTO Parking Brake Interlock Mode	0, PTO PRK BRK INT TYPE SET TO NONE	N/A
PTO Transmission Neutral Interlock	N, DISABLE FEATURE OR FUNCTION	N/A
PTO Eng Spd Limit w/VSS Limit	N, DISABLE FEATURE OR FUNCTION	N/A
PTO Ignore Vehicle Speed Sensor	N, DISABLE FEATURE OR FUNCTION	N/A
PTO Resume Switch Speed	950	RPM
PTO Set Switch Speed	950	RPM
PTO Additional Switch Speed	950	RPM
PTO Ramp Rate	250	RPM/SEC
Remote PTO Number of Speed Settings	1	N/A

Remote PTO Speed Setting 1	950	RPM
Remote PTO Speed Setting 2	950	RPM
Remote PTO Speed Setting 3	950	RPM
Remote PTO Speed Setting 4	950	RPM
Remote PTO Speed Setting 5	950	RPM
Remote Station PTO Resume Sw Spd	950	RPM
Remote Station PTO Set Switch Speed	950	RPM
Remote Station PTO Addition Sw Spd	950	RPM
Transmission Driven PTO	N, DISABLE FEATURE OR FUNCTION	N/A
Transmission Driven PTO Type	0, ENGINE DRIVEN STEADY LOAD	N/A
Powertrain Protection Enable	N, DISABLE FEATURE OR FUNCTION	N/A
Max Torque Allow By Axle/Driveshaft	23602	LB-FT
Max Torque in Top Gear Range	2995	LB-FT
Max Torque in Int. Gear Range	2995	LB-FT
Max Torque in Low Gear Range	2995	LB-FT
Max Torque w/o Vehicle Speed	1475	LB-FT
Lowest Gear of Top Gear Range	2.00	N/A
Lowest Gear of Int. Gear Range	3.00	N/A
Lowest Gear of Low Gear Range	6.00	N/A
Engine Protection Shutdown	N, DISABLE FEATURE OR FUNCTION	N/A
Engine Protection Restart Inhibit	Y, ENABLE FEATURE OR FUNCTION	N/A
Trip Information Vehicle Ovrsped1	0	MPH
Trip Information Vehicle Ovrsped2	0	MPH
Maintenance Monitor Enable	N, DISABLE FEATURE OR FUNCTION	N/A
Maintenance Monitor Operating Mode	0, MAINTENANCE MONITOR AUTOMATIC MODE OF OPERATION	N/A
Maintenance Monitor Alert Percent	90	%
Maintenance Monitor Distance	15000	MILES
Maintenance Monitor Fuel	2000	GALLONS
Maintenance Monitor Time	500	HOURS
Maintenance Monitor Interval Factor	1.00	N/A
Master Password	000000	N/A
Adjustment Password	000000	N/A
Reset Password	000000	N/A

These Electronic Parameters have been successfully finalized

<u>Code</u>	<u>Description</u>	<u>List</u> (US DOLLAR)
MH02500	Base Chassis, Model 4300 SBA LP 4X2 with 175.00 Wheelbase, 107.90 CA, and 63.00 Axle to Frame.	\$80,092.00
1570	TOW HOOK, FRONT (2) Frame Mounted	\$73.00
1CAA	FRAME RAILS High Strength Low Alloy Steel (80,000 PSI Yield); 9.125" x 3.062" x 0.312" (231.8mm x 77.8mm x 8.0mm) With Transition to 6.500" x 3.062" x 0.312" (165.1mm x 77.8mm x 8.0mm) 388.4" (9864mm) Maximum OAL; For LP Chassis	\$0.00
	<u>Notes</u> : 6.50" Web Height in AF Section	
1LNN	BUMPER, FRONT Full Width, Aerodynamic, Chrome Plated Steel; 0.142" Material Thickness	\$397.00
1WEH	WHEELBASE RANGE 134" (340cm) Through and Including 197" (500cm)	\$0.00
2ATL	AXLE, FRONT NON-DRIVING {Meritor MFS-09-122A} I-Beam Type, 9,000-lb Capacity	\$166.00
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.	
3AGW	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 9,000-lb Capacity; With Shock Absorbers	\$117.00
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free	
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.	
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	(\$339.00)
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4	
	<u>Notes</u> : Front and Rear Dust Shields not Included	
4732	DRAIN VALVE {Berg} Manual; With Pull Chain, for Air Tank	\$30.00
	<u>Includes</u> : DRAIN VALVE Mounted in Wet Tank	
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)	\$1,357.00
4EBT	AIR DRYER {Bendix AD-IP} With Heater	\$526.00
	<u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab	
4EXP	BRAKE CHAMBERS, FRONT AXLE {Bendix} 20 SqIn	\$0.00

<u>Code</u>	<u>Description</u>	<u>List</u> (US DOLLAR)
4EXS	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 24/30 Spring Brake	\$34.00
4JCG	BRAKES, FRONT, AIR CAM S-Cam; 15.0" x 4.0"; Includes 20 Sq. In. Long Stroke Brake Chambers	\$0.00
	<u>Notes</u> : Front Axle with 14,000-lb GAWR is Limited to 13,200-lb GAWR when used in Conjunction with 15" BRAKES, FRONT, AIR CAM. : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.	
4NCW	BRAKES, REAR, AIR CAM S-Cam; 15.0" x 8.63"; Includes 24/30 Sq. In. Long Stroke Brake Chambers and Spring Actuated Parking Brake	\$278.00
	<u>Notes</u> : Rear Axle is Limited to 20,000-LB GAWR with Code 04092 BRAKE SYSTEM, AIR and Code 04NCW BRAKES, REAR, AIR CAM Regardless of Axle/Suspension Ordered	
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM Capacity	\$69.00
5708	STEERING COLUMN Tilting	\$125.00
5CAN	STEERING WHEEL 2-Spoke; 18" Dia., Black, Leather Wrapped	\$61.00
5PSA	STEERING GEAR {Sheppard M100} Power	\$110.00
7BLB	EXHAUST SYSTEM Single, Horizontal Aftertreatment Device, Frame Mounted Under Right Rail, Back of Cab, for Vertical Tail Pipe, Frame Mounted Right Side Back of Cab	\$2,168.00
7SCP	ENGINE EXHAUST BRAKE for Cummins ISB/B6.7/ISL Engine with Variable Vane Turbo Charger	\$184.00
7WBA	TAIL PIPE (1) Turnback Type, Bright, for Single Exhaust	\$162.00
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel	\$133.00
7WZX	SWITCH, FOR EXHAUST 3 Position, Momentary, Lighted Momentary, ON/CANCEL, Center Stable, INHIBIT REGEN, Mounted in IP Inhibits Diesel Particulate Filter Regeneration When Switch is Moved to ON While Engine is Running, Resets When Ignition is Turned OFF	\$42.00
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	\$0.00
	<u>Includes</u> : BATTERY BOX Steel : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : FUSES, ELECTRICAL SAE Blade-Type : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : JUMP START STUD Located on Positive Terminal of Outermost Battery : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered	
8541	HORN, ELECTRIC (2) Disc Style	\$29.00

<u>Code</u>	<u>Description</u>	<u>List</u> (US DOLLAR)
8718	POWER SOURCE Cigar Type Receptacle without Plug and Cord	\$30.00
8GXK	ALTERNATOR {Leece-Neville BLP4006HN} Brushless, 12 Volt 325 Amp. Capacity, Pad Mount, with Remote Sense	\$1,358.00
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/ Accessory Power/Ground and Sealed Connector for Stop/Turn	\$100.00
8NBR	BATTERY SYSTEM {JCI} Maintenance-Free (3) 12-Volt 2100CCA Total	\$309.00
8RME	RADIO AM/FM/WB/Clock/3MM Auxiliary Input, with Multiple Speakers, With CD Player	\$474.00
8VUX	BATTERY BOX Steel, with Plastic Cover, 25" Wide, 2 or 3 Battery Capacity, Mounted Right Side Under Cab	\$0.00
8WBW	JUMP START STUD Remote Mounted	\$168.00
	<u>Includes</u> : JUMP START STUD Mounted to Battery Box	
8WCL	HORN, AIR Black, Single Trumpet, Air Solenoid Operated	\$94.00
8WEE	SWITCH, AIR HORN, PASSENGER Fire Truck Application; Momentary Switch Located in Instrument Panel Close to Passenger, Driver Also To Activate Switch at Steering Wheel	\$57.00
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time	\$26.00
8WPB	HEADLIGHTS Halogen; Composite Aero Design for Two Light System; Includes Daytime Running Lights	\$58.00
8WPM	FOG LIGHTS (2) Clear, Oval, With H355W Halogen Bulb	\$133.00
	<u>Notes</u> : Fog Lights are Not Driving Lights	
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	\$42.00
8WRB	HEADLIGHTS ON WWIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on	\$22.00
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection	\$0.00
8WWJ	INDICATOR, LOW COOLANT LEVEL With Audible Alarm	\$0.00
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses	\$99.00
9HBM	GRILLE Stationary, Chrome	\$99.00
9WAY	FRONT END Tilting, Fiberglass, With Three Piece Construction	\$0.00
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	\$0.00
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GA"	
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	\$0.00
10771	PAINT CLASS Single Custom Color	\$600.00
10943	KEYS - ALL ALIKE Fleet - Includes Ignition and Cab Door Keys	\$39.00

<u>Code</u>	<u>Description</u>	<u>List</u> (US DOLLAR)
10WBC	KEYS - ALL ALIKE, ID Z-150	\$0.00
11001	CLUTCH Omit Item (Clutch & Control)	\$0.00
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	\$0.00
12EJV	ENGINE, DIESEL {Cummins B6.7 260} EPA 2017, 260 HP @ 2400 RPM, 660 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 260 Peak HP (Max)	\$3,323.00
12TSY	FAN DRIVE {Borg-Warner SA85} Viscous Type, Screw On	\$0.00
	<u>Includes</u> : FAN Nylon	
12UYE	RADIATOR Aluminum; 2-Row, Cross Flow, Over Under System, 717 SqIn Louvered, With 313 SqIn Charge Air Cooler. With In-Tank Transmission Cooler	\$0.00
	<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber	
12VBR	AIR CLEANER With Service Protection Element	\$0.00
	<u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted	
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel	\$0.00
12WPV	OIL PAN 15 Quart Capacity, For Cummins ISB/B6.7 Engines	\$0.00
12WSY	BLOCK HEATER, ENGINE {Phillips} 120 Volt/750 Watt; for Cummins ISB/B6.7 Engines	\$90.00
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Idle Regulations	\$0.00
12XAT	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; With Ignition Switch Control for Cummins ISB/B6.7 or ISL Engines	\$45.00
12XZE	FEDERAL EMISSIONS {Cummins B6.7} EPA, OBD and GHG Certified for Calendar Year 2017	\$700.00
13ATE	TRANSMISSION, AUTOMATIC {Allison 2200_EVS_P} 5th Generation Controls; Close Ratio, 6-Speed, with Double Overdrive; Includes Park Pawl, with PTO Provision, Less Retarder, with 26,000-lb GVW & GCW Max.	\$5,505.00
	<u>Includes</u> : OIL FILTER, TRANSMISSION Mounted on Transmission : TRANSMISSION OIL PAN Magnet in Oil Pan	
13WLN	TRANSMISSION OIL Synthetic; 20 thru 28 Pints	\$151.00
13WYY	SHIFT CONTROL PARAMETERS Allison 1000 or 2000 Series Transmissions, 5th Generation Controls, Performance Programming	\$0.00
13XAN	PTO LOCATION No PTO	\$0.00
14899	SUSPENSION AIR CONTROL VALVE Pressure Release Control In Cab	\$163.00
14AJT	AXLE, REAR, SINGLE {Navistar Select} Single Reduction, 17,500-lb Capacity, With 190 Wheel Ends . Gear Ratio: 4.33	(\$163.00)

<u>Code</u>	<u>Description</u>	<u>List</u> (US DOLLAR)
14TBL	SUSPENSION, REAR, AIR, SINGLE {International} Ride Optimized Suspension (IROS); 12,000-lb Capacity, 5.3" Ride Height, With Shock Absorbers	\$1,238.00
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.	
14WAS	SUSPENSION LEVELING VALVE Dual Height; One Additional, for Air Ride Suspension	\$151.00
15LMS	FUEL/WATER SEPARATOR Cummins Supplied on Engine, with 12 Volt DC Heater, with Water-in-Fuel Sensor	\$421.00
15SWU	FUEL TANK Top Draw; D-Style, Non-Polished Aluminum, 16" Tank Depth, 40 U.S. Gal., 151 L Capacity, with Quick Connect Outlet, Mounted Left Side, Under Cab	\$0.00
15WDG	DEF TANK 7 U.S. Gal. 26.5L Capacity, Frame Mounted Outside Left Rail, Under Cab	\$0.00
16030	CAB Conventional	\$0.00
	<u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color : STEP (4) Two Steps Per Door	
16135	AIR CONDITIONER, PROVISION FOR Accommodation Package, for Air Conditioning, Includes (1) TransAir 512307 Compressor, With Mounting Kit and Compressor Drive Effects for Vehicle With Primary Compressor Mounting	\$539.00
16HBA	GAUGE CLUSTER English With English Electronic Speedometer	\$0.00
	<u>Includes</u> : GAUGE CLUSTER (5) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)	
16HGH	GAUGE, OIL TEMP, AUTO TRANS , for Allison Transmission	\$48.00
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} With Black Bezel Mounted in Instrument Panel	\$30.00
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	\$0.00
16HLJ	GAUGE, DEF FLUID LEVEL	\$0.00
16JNT	SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, With 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust	\$116.00
	<u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type	

<u>Code</u>	<u>Description</u>	<u>List</u> (US DOLLAR)
16RPV	SEAT, PASSENGER {National 2000} Air Suspension, High Back With Integral Headrest, Vinyl, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Back Adjust <u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type	\$508.00
16SDC	GRAB HANDLE (2) Chrome Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry, Mounted Left and Right, Each Side at "B" Pillar	\$236.00
16SDU	MIRRORS (2) {Lang Mekra} Styled; Rectangular, Power Both Sides, Thermostatically Controlled Heated Heads, Clearance Lights LED, Bright Finish Heads & Brackets, Breakaway Type, 7.09" x 15.75" & Integral Convex Both Sides, 102" Inside Spacing	\$620.00
16SJX	MIRROR, CONVEX, HOOD MOUNTED (2) {Lang Mekra} Bright, Heated, Left and Right Sides 7.44" Sq	\$337.00
16VBZ	SEAT BELT All Red; 1 to 3	\$26.00
16WBY	ARM REST, RIGHT, DRIVER SEAT	\$39.00
16WBZ	ARM REST, LEFT, PASSENGER SEAT	\$39.00
16WCT	AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster <u>Includes</u> : HEATER HOSES Premium : HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps : REFRIGERANT Hydrofluorocarbon HFC-134A	\$923.00
16WJS	INSTRUMENT PANEL Center Section, Flat Panel	\$0.00
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	\$367.00
16WLS	FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood	\$76.00
16WRZ	CAB INTERIOR TRIM Premium <u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering : CAB SOUND INSULATION Includes Dash and Engine Cover Insulators : CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets, CB Radio Pocket, Speakers, and Reading Lights : COURTESY LIGHT (2) Mounted In Front Map Pocket Left and Right Side : DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors : FLOOR COVERING Rubber, Black : GAUGE, TEMPERATURE, AMBIENT Includes Wiring and Sensor With Display Unit Mounted in Cluster : HEADLINER Soft Padded Cloth : INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors : SUN VISOR (3) Padded Vinyl: 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side	\$304.00
16WSE	LOW WASHER FLUID INDICATOR	\$15.00

<u>Code</u>	<u>Description</u>	<u>List</u>
27DAR	WHEELS, FRONT {Accuride} DISC; 19.5x7.50 Rims, Polished Aluminum; 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	(US DOLLAR) \$795.00
	<u>Notes</u> : Aluminum Wheels not Painted or Coated : Compatible Tire Sizes: 245/70R19.5, 265/70R19.5	
28DAR	WHEELS, REAR {Accuride} DUAL DISC; 19.5x7.50 Rims, Polished Aluminum Outer Wheel 10-Hand Hole, Steel Inner Wheel 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	\$872.00
	<u>Notes</u> : Aluminum Wheels not Painted or Coated : Compatible Tire Sizes: 245/70R19.5, 265/70R19.5	
29580	WHEEL SEALS, FRONT {International} Oil-Lubricated Wheel Bearings	\$37.00
7749450101	(2) TIRE, FRONT 245/70R19.5 Load Range G G647 RSS (GOODYEAR), 626 rev/mile, 75 MPH, All-Position	\$224.00
7749458102	(4) TIRE, REAR 245/70R19.5 Load Range G G622 RSD (GOODYEAR), 620 rev/mile, 75 MPH, Drive	\$344.00
	Total of Product Features	\$107,641.00
	Services Section:	
40116	WARRANTY Standard for Durastar 1000/4000 Series, Effective with Vehicles Built January 2, 2015 or Later, CTS-2475P	\$0.00
40KER	SRV CONTRACT, EXT CMMS ENGINE {Cummins} To 84-Month/250,000 Miles (400,000 km), Extended Cummins ISB Engine Coverage, Protection Plan 2 (Truck Application Only)	\$2,600.00
40KTR	SRV CONTRACT, EXT ELECTRICAL {Navistar Prepackaged Components} Excludes Starter and Alternator, To 60-Month/200,000 Miles (320,000 km)	\$420.00
40NCP	SRV CONTRACT, EXT HTR/AC SYS {Navistar Prepackaged Components} To 60-Month/250,000 Miles (400,000 km)	\$1,560.00
	Total of Service Features	\$4,580.00
	Total List Price Including Options:	\$112,221.00
TSC	HADLEY/GROVER AIR HORNS MTD ON HOOD W/FOOT SWITCHES	\$1,014.00
TSC	ADD DUAL A/C COMPRESSOR	(\$539.00)
	SPECIAL PROGRAMMING	\$1,200.00
TSC	AUXILIARY AIR TANK FOR HORNS	\$405.00
	VOGEL (16) POINT AUTO LUBE SYSTEM W/KFU PUMP	\$2,600.00
	PING TANKS	\$440.00
	ADD LED HEADLIGHTS	\$450.00
	ADD LED FOG LIGHTS	\$195.00
	Total Goods Purchased:	\$5,765.00

<u>Description</u>	<u>(US DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$107,641.00	
Service Items	\$4,580.00	
Total Factory List Price Including Options:		\$112,221.00
Total Goods Purchased:		\$5,765.00
FREIGHT & SECONDARY MOVEMENT CHARGES	\$2,085.00	
Total Freight:		\$2,085.00
Total Factory List Price Including Freight:		\$120,071.00
Less Customer Allowance:		(\$38,072.18)
Total Vehicle Price:		\$81,998.82
Total Sale Price:		\$81,998.82
Total Per Vehicle Sales Price:		\$81,998.82
Net Sales Price:		\$81,998.82

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.